



MILLTRONICS
C N C M A C H I N E S

HM20 C Mechanical

7-20-2015
Rev 4


Table of Contents


Table of Contents	i
Manual Discrepancy Sheet	1
Machine Base Assembly	2
Machine Saddle Assembly	4
Oil Track Cover Assembly	7
Milling Table Assembly	8
Machine Column/Head Assembly	10
Spindle Motor Cover Assembly	12
Flood Tank W/Washdown Assembly	14
Enclosure Bottom Assembly	16
Enclosure Top Assembly	18
Enclosure Front Door Assembly	20
Enclosure Rear Door Assembly	22
Enclosure Side Door Assembly	24
Chip Auger Assembly	26
Enclosure Swivel Monitor Assembly	28
Control Box Assembly #01018838	30
Power Drawbar Cylinder Assembly	32
Tool Changer Slide/Bracket Assembly	34
Tool Changer Door Assembly	36
X & Y Axis Autolube Manifold Assembly	38
X & Y Axis Air/Oil Manifold Assembly	40
Z-Axis Air/Oil Manifold Assembly	42
Z-Axis Autolube Manifold Assembly	44
Thermal Compensation Assembly	45
Air Filter / Lubricator / Filter Assembly	46
Retention Knob Chart	47
Machine Lubrication Instructions	48
Waylube Pump MA00458	50

Manual Discrepancy Sheet

1. On page 10, #3 ballscrew assembly is MP-570 and not MP-274. #8 motor plate options are MXH0009 and MXH0007 as shown.
2. On page 29, item #9 is #01018838 as shown.
3. On page 29, work light and cycle light added as "not shown". MA-494 and 495.

Machine Base Assembly

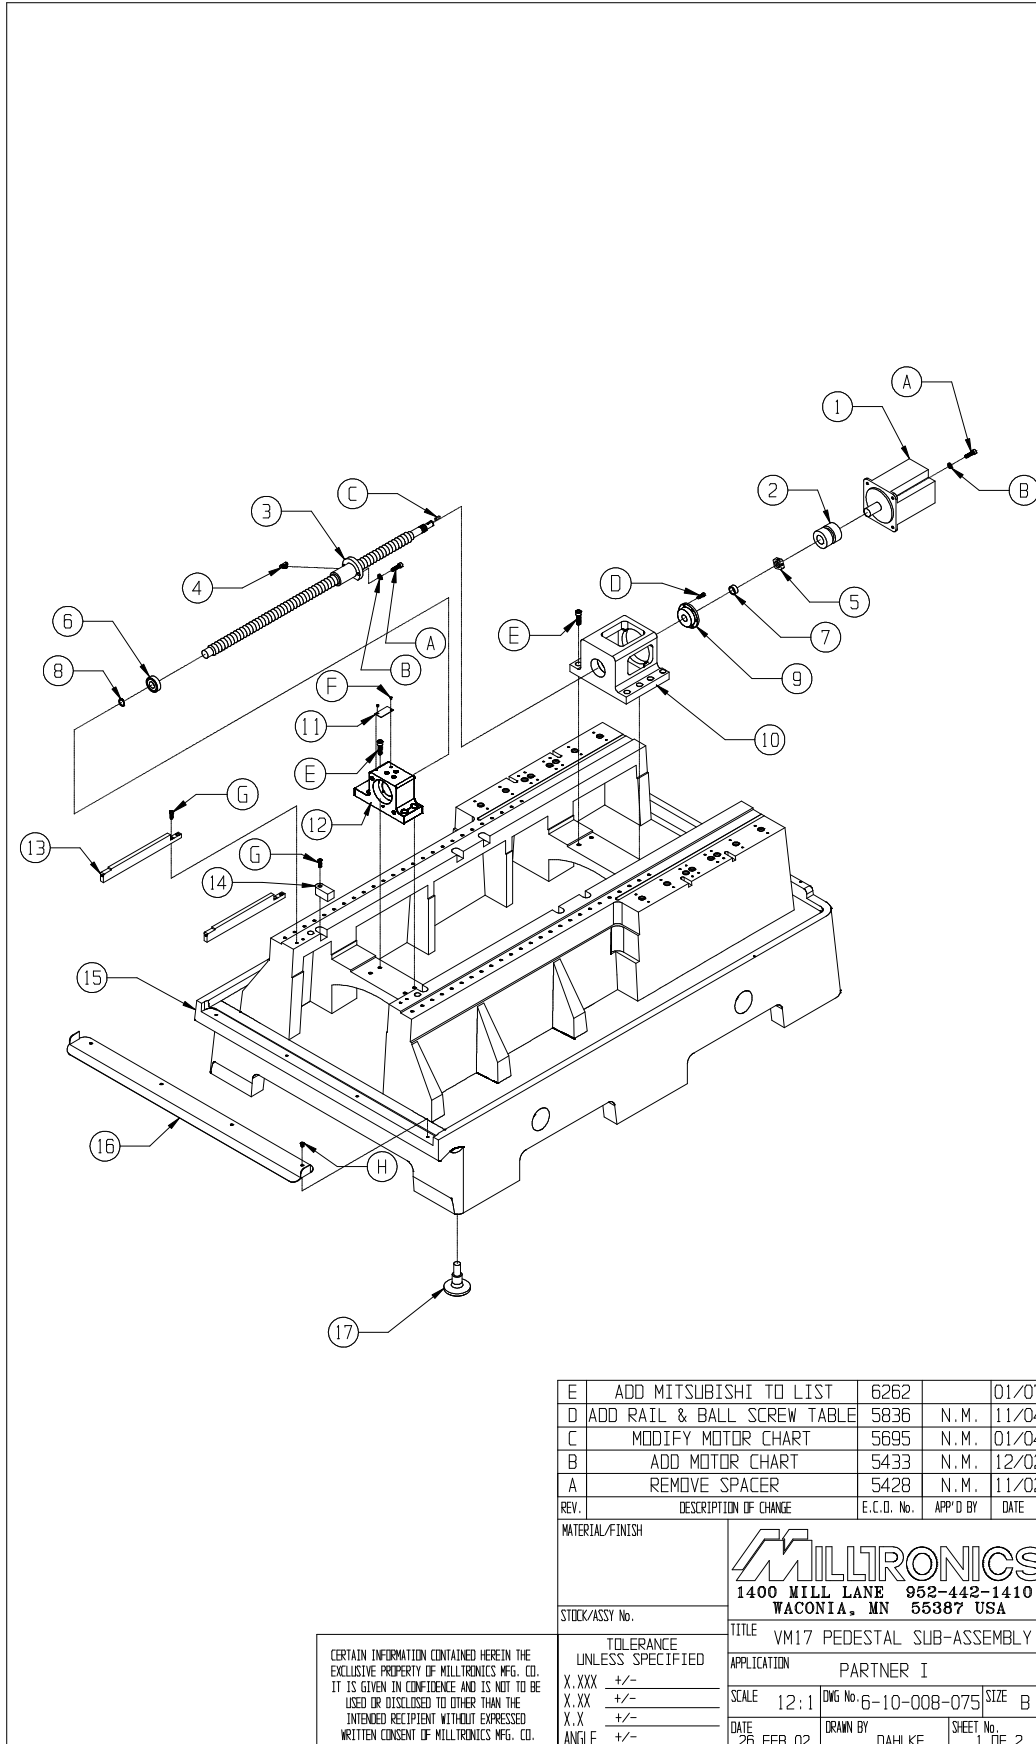

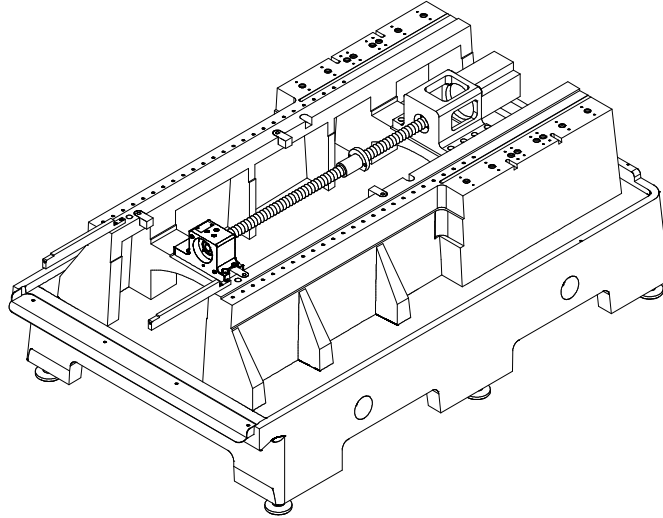

BALL SCREWS		
3	STANDARD RAPIDS	MPB-02
	HIGH SPEED OPTION	MP-801

PARTS LIST			
No.	QTY	STOCK No.	DESCRIPTION
1	1	SEE TABLE	AXIS MOTOR
2	1	SEE TABLE	MOTOR COUPLER
3	1	SEE TABLE	Y - AXIS BALL SCREW
4	1	NU-161	1/8 NPT 4mm SWIVEL ELBOW
5	1	MP1-94	BALL SCREW LOCK NUT
6	1	BG-02	BEARING 6204
7	1	MP1-107	BEARING LOCK NUT SPACER
8	1	MP1-108	BALL SCREW SNAP RING
9	1	BG-94	BALL SCREW SUPPORT BEARING
10	1	MX-51	Y - AXIS REAR MOTOR MOUNT
11	1	LB-27	PULLEY MOTOR WARNING LABEL
12	1	MX-64	FRONT BALL SCREW RADIAL MOUNT
13	2	SEE TABLE	Y - AXIS FRONT WAY COVER BRACKET
14	4	MP-707	HARD STOP BLOCK
15	1	MX1-61	PEDESTAL - MACHINED
16	1	MP1-473	PEDESTAL DRIP LIP
17	6	MP1-29	LEVELING PAD

FRONT WAY COVER BRACKET		
13	BALL RAIL STANDARD	MP1-391
	ROLLER RAIL OPTION	MP1-472

MOTOR & COUPLER LIST				
No.	YASKAWA	FANUC	SIEMENS	MITSUBISHI
1	MD-123 (.5kw) MD-125 (1.0kw) MD-127 (1.5kw)	4Nm A06B-0223-B200 8Nm A06B-0227-B200	6Nm 1FK7060-5AF71-1EA0 11Nm 1FK7063-5AF71-1EA0	MD-184
2	MA-242 (.5kw/1.0kw) MA-241 (1.5kw)	MA-242	MA-260	MA-260

HARDWARE LIST		
No.	QTY	DESCRIPTION
A	6	M8-1.25 x 30mm SHCS
B	6	M8 LOCK WASHER
C	1	3/16 x 3/16 x 1/2 KEY
D	6	M6-1 x 25mm SHCS
E	8	M10-1.5 x 30mm SHCS
F	2	1/4 DRIVE PIN
G	8	M6-1 x 20mm SHCS
H	4	M6-1 x 10mm BHCS


E	ADD MITSUBISHI TO LIST	6262		01/07
D	ADD RAIL & BALL SCREW TABLE	5836	N.M.	11/04
C	MODIFY MOTOR CHART	5695	N.M.	01/04
B	ADD MOTOR CHART	5433	N.M.	12/02
A	REMOVE SPACER	5428	N.M.	11/02
REV.	DESCRIPTION OF CHANGE	E.C.O. No.	APP'D BY	DATE

MATERIAL/FINISH	 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA			
STOCK/ASSY No.	TITLE VM17 PEDESTAL SUB-ASSEMBLY			
	APPLICATION PARTNER I			
	SCALE 12:1	DWG No. 6-10-008-075	SIZE B	
DATE 26 FEB 02	DRAWN BY DAHLKE	SHEET No. 2 OF 2		


CERTAIN INFORMATION CONTAINED HEREIN THE EXCLUSIVE PROPERTY OF MILLTRONICS MFG. CO. IT IS GIVEN IN CONFIDENCE AND IS NOT TO BE USED OR DISCLOSED TO OTHER THAN THE INTENDED RECIPIENT WITHOUT EXPRESSED WRITTEN CONSENT OF MILLTRONICS MFG. CO.

TOLERANCE UNLESS SPECIFIED	
X.XXX	+/-
X.XX	+/-
X.X	+/-
ANGLE	+/-

Machine Saddle Assembly

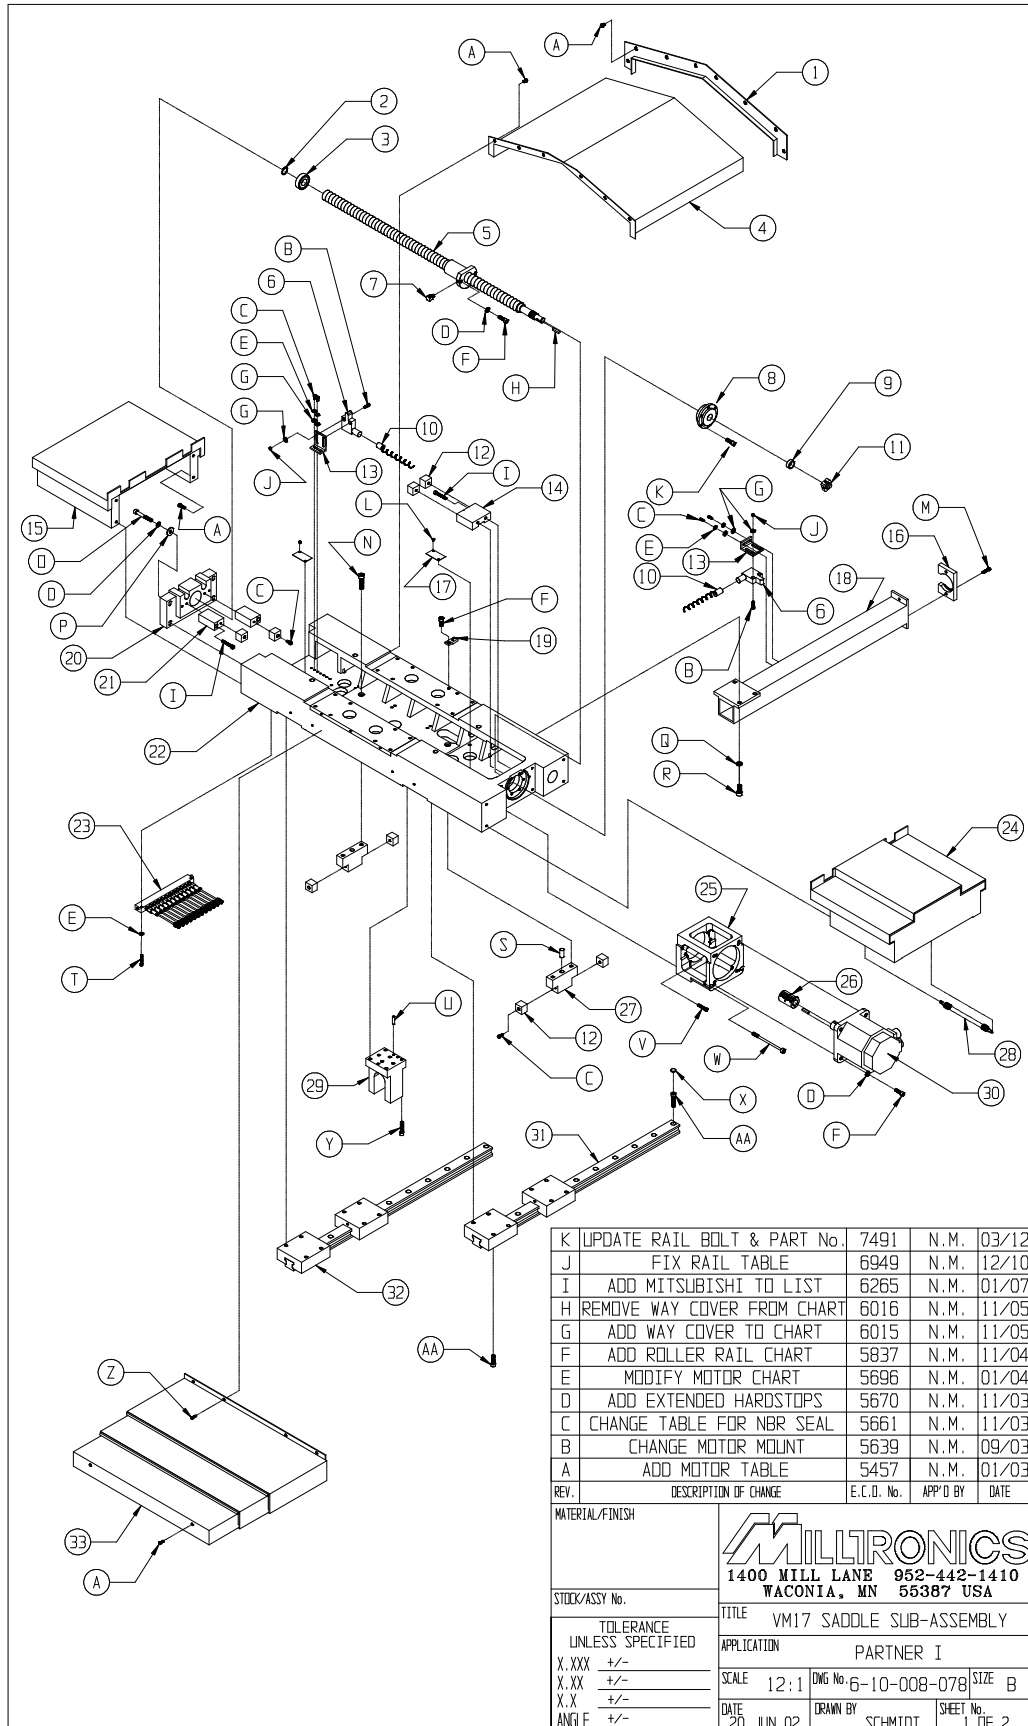

PARTS LIST		
No.	QTY	STOCK No. DESCRIPTION
1	1	MP10383 REAR WAY COVER WIPER
2	1	MP10108 SNAP RING
3	1	BG00002 6204 BEARING
4	1	SEE TABLE REAR WAY COVER
5	1	SEE TABLE X AXIS BALL SCREW
6	2	SW00193 HOME SWITCH
7	1	NU00161 1/8 NPT SWIVEL ELBOW 4nn TUBE
8	1	BG00094 BALLSCREW SUPPORT BEARING
9	1	MP10107 BEARING LOCKNUT SPACER
10	2	SW00191 X AXIS SWITCH CORD
11	1	MP10094 BALL SCREW LOCKNUT
12	8	MP00718 POM HARD STOP BUMPER
13	2	MP10387 HOME SWITCH BRACKET
14	1	MP10446 HARD STOP BLOCK RIGHT
15	1	SEE TABLE X AXIS WAY COVER - LEFT
16	1	BR00111 CONDUIT BRACKET
17	2	LB00027 PULLEY MOTOR WARNING LABEL
18	1	MP10388 Y AXIS CABLE BRACKET
19	1	MP10418 OIL LINE BRACKET
20	1	MP10389 X AXIS RADIAL SUPPORT BRACKET
21	2	MP10447 HARD STOP BLOCK LEFT
22	1	SEE TABLE SADDLE
23	1	SEE TABLE X & Y AXIS MANIFOLD ASSEMBLY
24	1	SEE TABLE X AXIS WAY COVER - RIGHT
25	1	MX10059 MOTOR MOUNT
26	1	SEE TABLE MOTOR COUPLER
27	2	MP10410 SADDLE HARD STOP BLOCK
28	4	SEE TABLE X AXIS WAY COVER SPRING
29	1	MX10011 Y/Z AXIS BALL SCREW CARRIER - MACHINED
30	1	SEE TABLE AXIS MOTOR
31	2	SEE TABLE 35nn Y AXIS RAIL
32	4	SEE TABLE 35nn RAIL BLOCKS
33	1	MP10500 FRONT WAY COVER

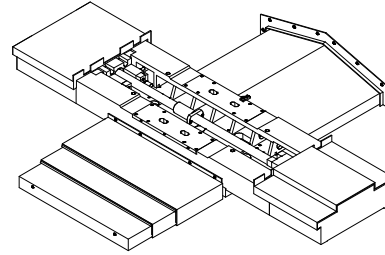

MANIFOLD ASSEMBLY		
No.	DRAWING No.	DESCRIPTION
23	10008058	X & Y AIR/OIL MANIFOLD ASSEMBLY
	10018049	VM X & Y AXIS OIL MANIFOLD ASSEMBLY

* THESE PARTS REMOVED FOR 30" & 40" X - AXIS TRAVEL

MOTOR & COUPLER LIST				
No.	YASKAWA	FANUC	SIEMENS	MITSUBISHI
26	MA00242 (.5/1.0kW)	MA00242	MA00260	MA00260
	MA00241 (1.5kW)			
30	MD00123 (.5kW)	4Nn A06B-0223-B200	6Nn 1FK7060-5AF71-1EA0	MD00184 (1.5kW)
	MD00125 (1.0kW)	8Nn A06B-0227-B200	11Nn 1FK7063-5AF71-1EA0	
	MD00127 (1.5kW)			


MACHINE VARIATION TABLE					
No.	DESCRIPTION	VM15/16/17 PART No.		VM20 PART No.	
		25" TRAVEL	30" TRAVEL	30" TRAVEL	40" TRAVEL
4	REAR WAY COVER	MP10382	MP10382	MP10462	MP10462
5	X AXIS BALL SCREW STANDARD	MP00569	MP00569	MP00569	MP00570
	X AXIS BALL SCREW RAPID	-	MP00802	MP00802	MP00821
15	X AXIS WAY COVER - LEFT	MP10385	MP10385	MP10385	MP10455
22	SADDLE - MACHINED	MX10055	MX10055	MX10055	MX10063
24	X AXIS WAY COVER - RIGHT	MP10442	MP10442	MP10442	MP10454
28	X AXIS WAY COVER SPRING	HD00062	HD00062	HD00062	HD00033
31	BALL RAIL	MP00640 (B20)	MP00640 (B20)	MPB0047 (1000)	MPB0047 (1000)
	ROLLER RAIL	-	MP00831 (B44)	MP00811 (1024)	MP00811 (1024)
32	BALL RAIL BLOCK	MP00641	MP00641	MP00641	MP00641
	ROLLER RAIL BLOCK	-	MP00815	MP00815	MP00815

HARDWARE LIST		
No.	QTY	DESCRIPTION
A	24	M6-1 x 12nn BHCS
B	4	M5-.8 x 20nn SHCS
C	12	M5-.8 x 16nn SHCS
D	10	M8 LOCK WASHER
E	6	M5 LOCK WASHER
F	7	M8-1.25 x 30nn SHCS
G	8	M5 FLAT WASHER
H	1	3/16 x 3/16 x 1/2 KEY
I	4	M6-1 x 40nn SHCS
J	4	M5-.8 HEX NUT
K	6	M6-1 x 25nn SHCS
L	4	1/4 DRIVE RIVIT
M	2	M6-1 x 25nn BHCS
N	4	M10-1.5 x 40nn SHCS
O	4	M8-1.25 x 45nn SHCS
P	4	M8 FLAT WASHER
Q	4	M10 LOCK WASHER
R	4	M10-1.5 x 30nn SHCS
S	2	12nn x 25nn DOWEL PIN
T	2	M5-.8 x 25nn SHCS
U	2	1/4 x 1 DOWEL PIN
V	4	M6-1 x 30nn SHCS
W	2	M6-1 x 130nn SHCS
	22	RAIL PLUGS MP00640 (B20) BALL RAIL
	42	RAIL PLUGS MP00831 (B44) ROLLER RAIL
	26	RAIL PLUGS MPB0047 (1000) BALL RAIL
	50	RAIL PLUGS MP00811 (1024) ROLLER RAIL
Y	6	M8-1.25 x 40nn SHCS
Z	4	M5-.8 x 10nn BHCS
	44	M8-1.25 x 30nn SHCS MP00640 (B20) BALL RAIL
	66	M8-1.25 x 35nn SHCS MP00831 (B44) ROLLER RAIL
	48	M8-1.25 x 30nn SHCS MPB0047 (1000) BALL RAIL
AA	72	M8-1.25 x 35nn SHCS MP00811 (1024) ROLLER RAIL


K	UPDATE RAIL BOLT & PART No.	7491	N.M.	03/12
J	FIX RAIL TABLE	6949	N.M.	12/10
I	ADD MITSUBISHI TO LIST	6265	N.M.	01/07
H	REMOVE WAY COVER FROM CHART	6016	N.M.	11/05
G	ADD WAY COVER TO CHART	6015	N.M.	11/05
F	ADD ROLLER RAIL CHART	5837	N.M.	11/04
E	MODIFY MOTOR CHART	5696	N.M.	01/04
D	ADD EXTENDED HARDSTOPS	5670	N.M.	11/03
C	CHANGE TABLE FOR NBR SEAL	5661	N.M.	11/03
B	CHANGE MOTOR MOUNT	5639	N.M.	09/03
A	ADD MOTOR TABLE	5457	N.M.	01/03
REV.	DESCRIPTION OF CHANGE	E.C.D. No.	APP'D BY	DATE
MATERIAL/FINISH				
STOCK/ASSY No.		1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
TOLERANCE UNLESS SPECIFIED		TITLE VM17 SADDLE SUB-ASSEMBLY		
X.XXX	+/-	APPLICATION PARTNER I		
X.XX	+/-	SCALE 15:1		
X.X	+/-	DATE 20 JUN 02		
ANGLE	+/-	DRAWN BY SCHMIDT		
		SHEET No. 2 OF 2		

This page intentionally unused.


Oil Track Cover Assembly

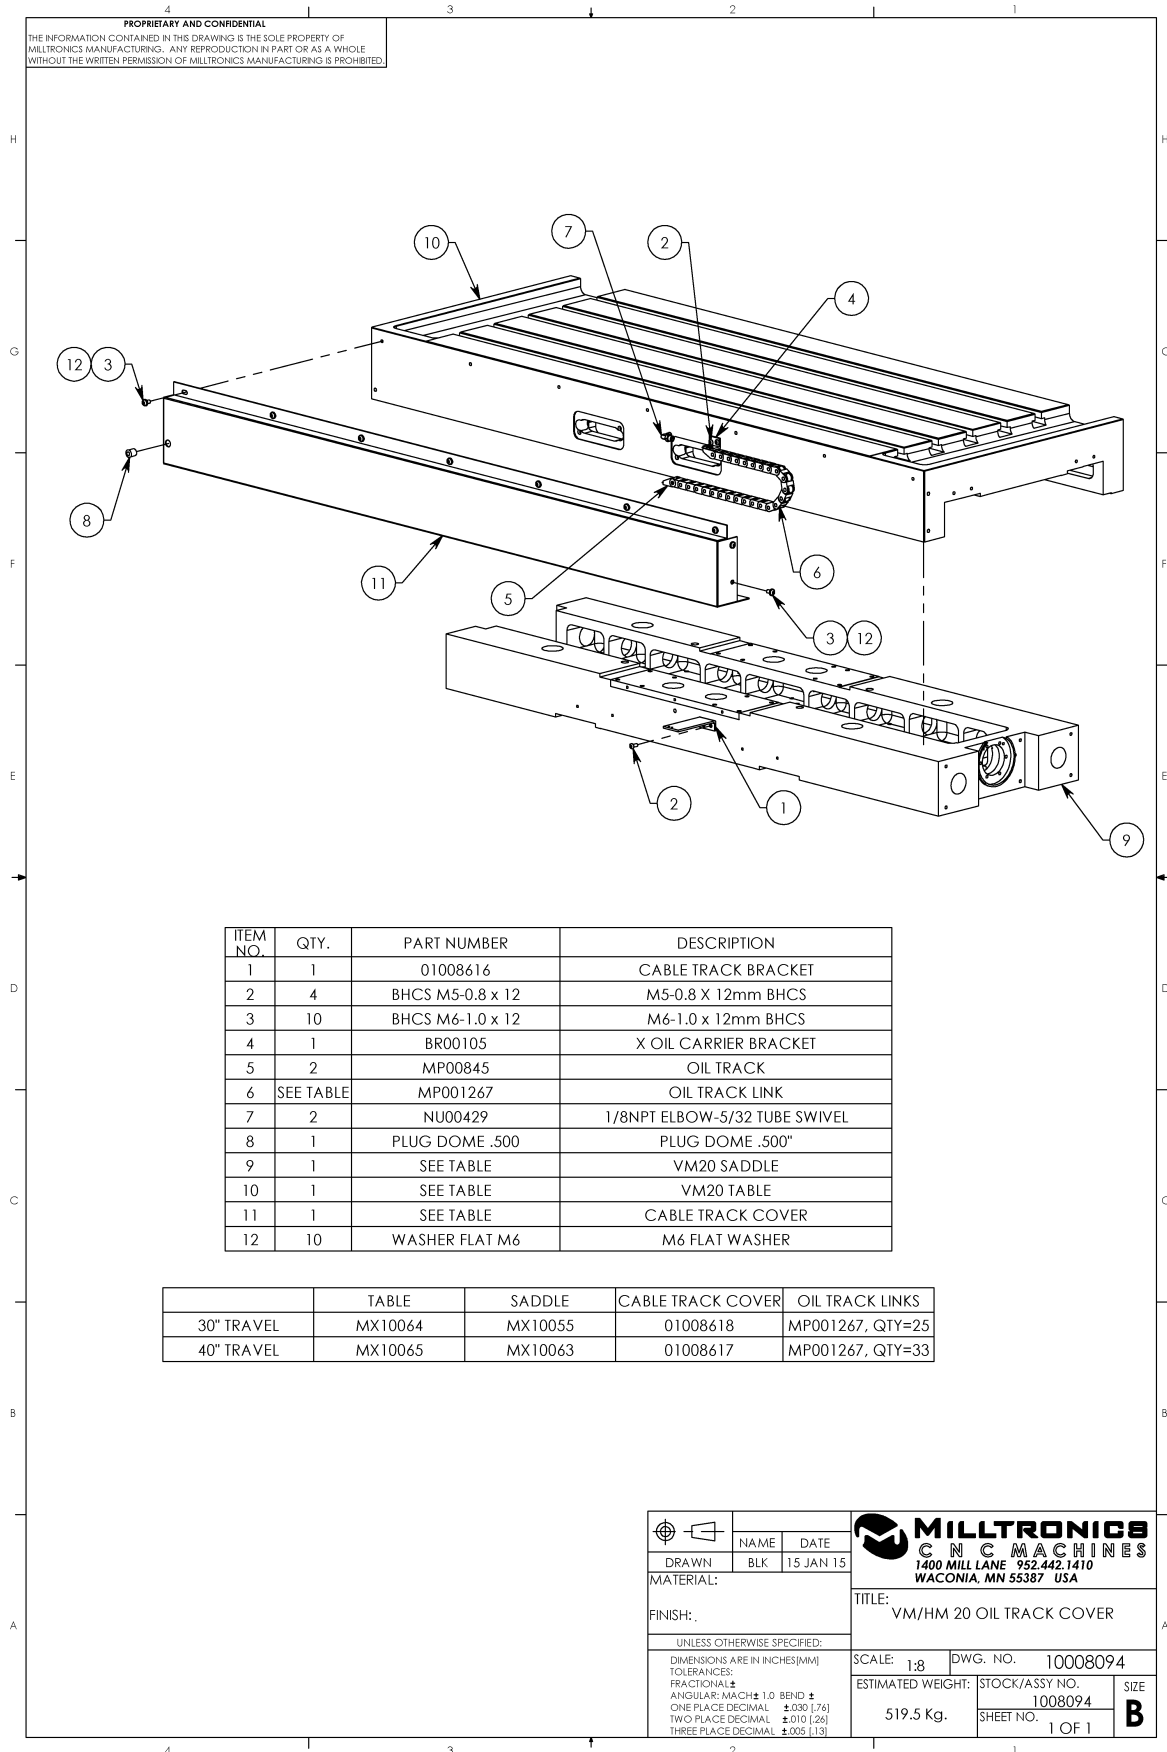

Milling Table Assembly

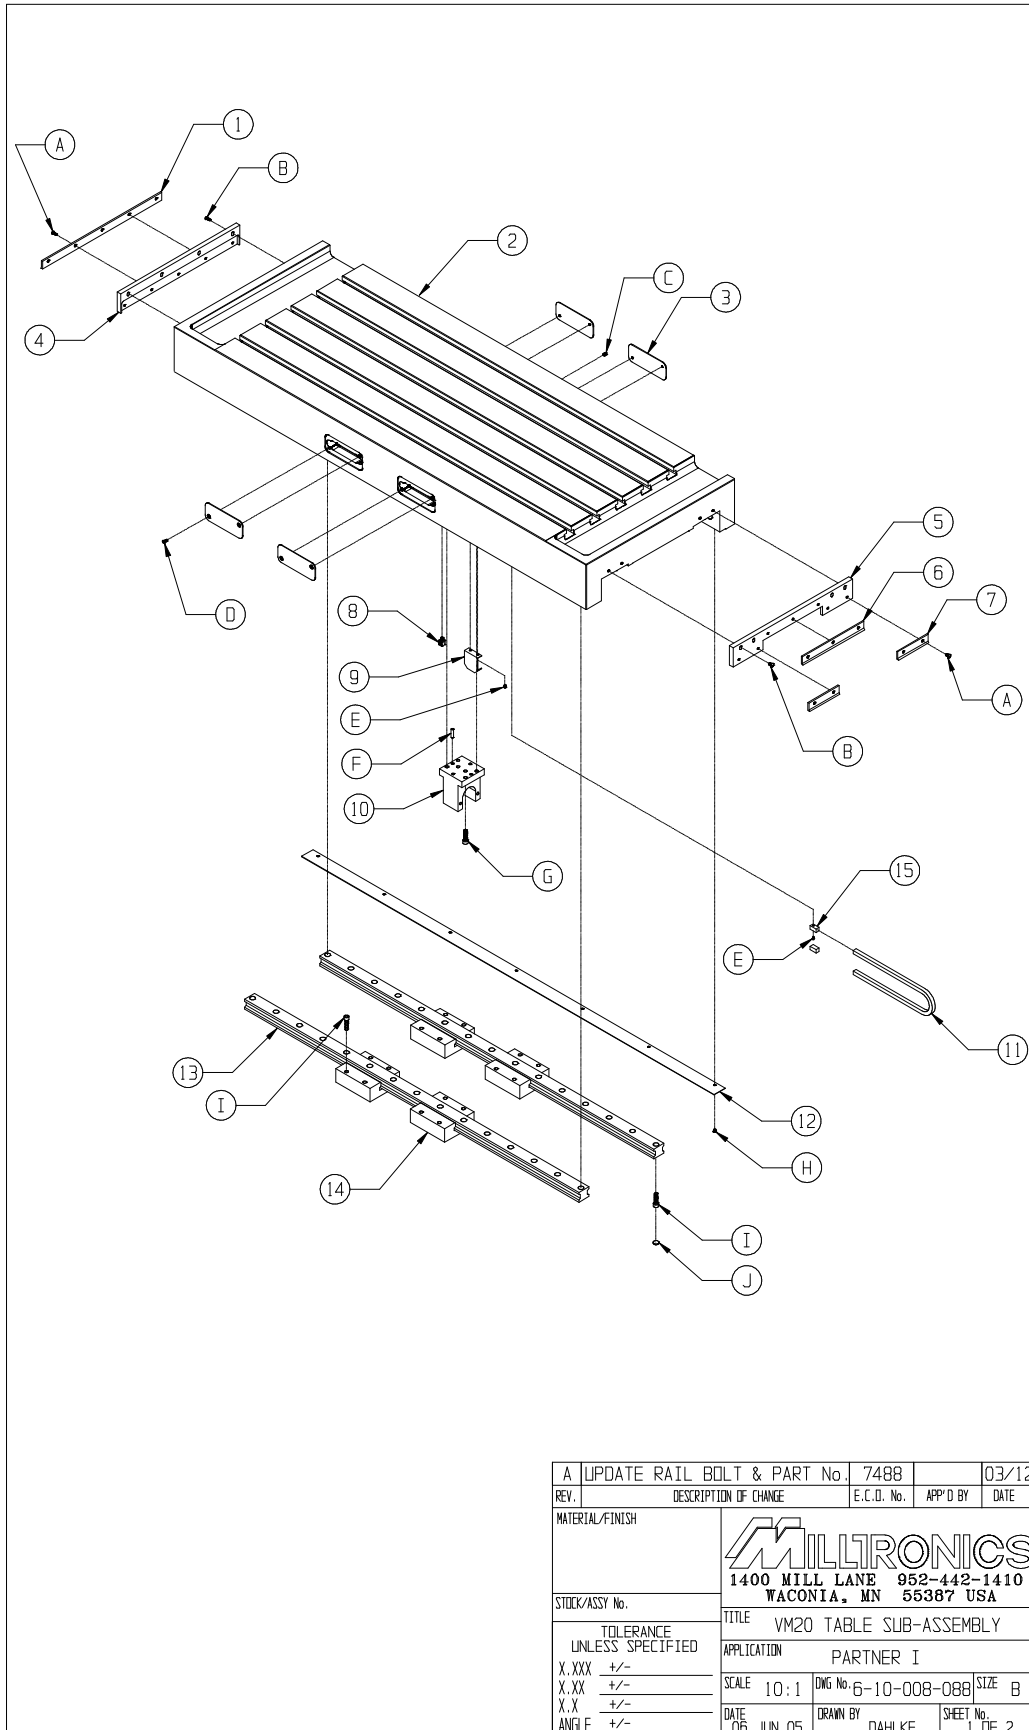

A	UPDATE RAIL BOLT & PART No.	7488		03/12
REV.	DESCRIPTION OF CHANGE	E.C.D. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.		TITLE VM20 TABLE SUB-ASSEMBLY		
TOLERANCE UNLESS SPECIFIED		APPLICATION PARTNER I		
X.XXX	+/-	SCALE 10:1	DWG No. 6-10-008-088	SIZE B
X.XX	+/-	DATE 06 JUN 05	DRAWN BY DAHLKE	SHEET No. 1 OF 2
X.X	+/-			
ANGLE	+/-			

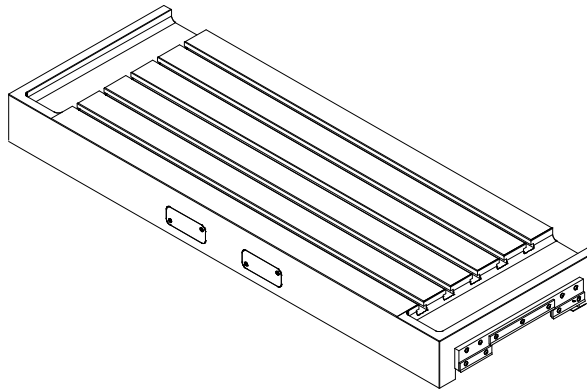

PARTS LIST

No.	QTY	STOCK No.	DESCRIPTION
1	1	MP10423	VM17 WIPER - LEFT
2	1	SEE TABLE	TABLE - MACHINED
3	4	MP00315	TABLE SLOT COVER
4	1	MP10419	X-AXIS WIPER PLATE - LEFT
5	1	MP10420	X-AXIS WIPER PLATE - RIGHT
6	1	MP10422	VM17 WIPER - UPPER
7	2	MP10421	VM17 WIPER - LOWER
8	2	N100161	SWIVEL ELBOW 1/8NPT - 4mm TUBE
9	1	MP60045	EXTENDED TRAVEL X-AXIS DOG
10	1	MX60016	X-AXIS BALL SCREW CARRIER
11	1	MP00844	X-AXIS CABLE TRACK - 33 LINKS
12	1	SEE TABLE	TABLE PLATE
13	2	SEE TABLE	35mm RAILS
14	4	SEE TABLE	35mm RAIL BLOCK
15	1	MP00845	X-AXIS CABLE TRACK - ENDS

HARDWARE LIST

No.	QTY	DESCRIPTION
A	12	M6-1 x 12mm BHCS
B	8	M6-1 x 25mm BHCS
C	1	1/8-27 NPT SHPP
D	8	M4-.7 x 8mm FHCS
E	6	M3-.5 x 6mm BHCS
F	2	1/4 x 1 DOWEL PIN
G	6	M8-1.25 x 35mm SHCS
H	7	M5-.8 x 12mm BHCS
I	46	M8-1.25 x 30mm SHCS - BALL RAIL 30"
	74	M8-1.25 x 35mm SHCS - ROLLER RAIL 30"
	52	M8-1.25 x 30mm SHCS - BALL RAIL 40"
	86	M8-1.25 x 35mm SHCS - ROLLER RAIL 40"
J	30	RAIL PLUG - BALL RAIL 30"
	58	RAIL PLUG - ROLLER RAIL 30"
	36	RAIL PLUG - BALL RAIL 40"
	70	RAIL PLUG - ROLLER RAIL 40"

TABLE TRAVEL

No.	DESCRIPTION	30" TRAVEL	40" TRAVEL
2	TABLE - MACHINED	MX10064	MX10065
12	TABLE PLATE	MP10463	MP10464
13	BALL RAIL	MP00732	MP00823
	ROLLER RAIL	MP00812	MP00824
14	BALL RAIL BLOCK	MP00641	MP00641
	ROLLER RAIL BLOCK	MP00815	MP00815


A	UPDATE RAIL BOLT & PART No.	7488		03/12
REV.	DESCRIPTION OF CHANGE	E.C.O. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.		TITLE VM20 TABLE SUB-ASSEMBLY		
TOLERANCE UNLESS SPECIFIED		APPLICATION PARTNER I		
X.XXX	+/-	SCALE 10:1	DWG No. 6-10-008-088	SIZE B
X.XX	+/-	DATE 06 JUN 05	DRAWN BY DAHLKE	SHEET No. 2 OF 2
X.X	+/-			
ANGLE	+/-			

Machine Column/Head Assembly

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED

SPINDLE MOTOR MOUNTING PLATE			
ITEM No.	QTY.	PART No.	DESCRIPTION
8	1	MXH0009	7.5kw MOTOR PLATE
	1	MXH0007	11kw MOTOR PLATE

SPINDLE MOTOR TABLE			
ITEM No.	QTY.	PART No.	DESCRIPTION
9	1	MO00166	7.5kw SPINDLE MOTOR
	1	MO00167	11kw SPINDLE MOTOR




ITEM NO.	QTY.	PART NO.	DESCRIPTION
1	1	MXH0002	COLUMN MACHINING
2	1	MX10059	X/Z MOTOR MOUNT MACHINED
3	1	MP-570	50" BALL SCREW ASSEMBLY
4	1	MPH0022	BALL SCREW END SUPPORT
5	1	MPH0002	SUPPORT PLATE
6	1	MXH0003	SPINDLE MOTOR MOUNT
7	1	MXH0004	X/Z MOTOR MOUNT MACHINED
8	1	SEE TABLE	SPINDLE MOTOR MOUNTING PLATE
9	1	SEE TABLE	SPINDLE MOTOR
10	1	BG00094	BALL SCREW SUPPORT BEARING
11	1	BG00002	BEARING NACHI 6204ZZ
12	1	MP10108	RETAINING RING EXTERNAL 19mm X 1.3mm
13	2	SEE TABLE	RAIL 45"
14	32	HD00090	MITEEBITE CLAMP
15	4	SEE TABLE	RAIL BLOCK
16	4	MP00718	POM HARDSTOP BLOCK
17	1	SEE TABLE	SPINDLE
18	1	MA00369	MOTOR COUPLER
19	4	SHCS M5-0.8 x 16	M5 - 0.8 x 16mm SHCS
20	10	SHCS M6-1.0 x 25	M6-1.0 X 25mm SHCS
21	4	SHCS M6-1.0 x 30	M6-1.0 x 30 SHCS
22	2	SHCS M6-1.0 x 130	SHCS M6-1.0 x 130mm
23	28	SHCS M8-1.25 x 30	M8-1.25 x 30mm SHCS
24	6	SHCS M6-1.0 x 20	M6-1.0 x 20 SHCS
25	62	SHCS M8-1.25 x 40	M8 - 1.25 x 40mm SHCS
26	6	SHCS M10-1.5 x 60	M10 - 1.5 x 60 SHCS
27	6	SHCS M12-1.75 x 60	M12-1.75 x 60 SHCS
28	4	SHCS M14-2.0 x 55	M14-2.0 x 45mm SHCS
29	8	SHCS .75-10 X 7.00	SHCS 3/4-10 X 7.00
30	4	WASHER FLAT M6	M6 FLAT WASHER
31	4	WASHER FLAT M8	M8 FLAT WASHER
32	4	WASHER LOCK M6	M6 LOCK WASHER
33	6	WASHER LOCK M8	M8 LOCK WASHER
34	6	WASHER LOCK M12	M12 LOCK WASHER
35	4	WASHER LOCK M14	M14 LOCK WASHER

RAIL BLOCK TABLE			
ITEM No.	QTY.	PART No.	DESCRIPTION
15	4	MP00641	BALL RAIL BLOCK
	4	MP00815	ROLLER RAIL BLOCK


RAIL TABLE			
ITEM No.	QTY.	PART No.	DESCRIPTION
13	2	MP00642	BALL RAIL
	2	MP00829	ROLLER RAIL


SPINDLE TABLE			
ITEM No.	QTY.	PART No.	DESCRIPTION
17	1	MP00864	10000 RPM SPINDLE
	1	MP00865	15000 RPM SPINDLE

	NAME	DATE	
	DRAWN	21 SEP 06	
MATERIAL:		1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA	
FINISH: PAINT MMC LIGHT GRAY		TITLE: COLUMN SUB-ASSEMBLY	
UNLESS OTHERWISE SPECIFIED:		SCALE: 1:24 DWG. NO. 10038001	
DIMENSIONS ARE IN INCHES (MM)		ESTIMATED WEIGHT: STOCK/ASSY No.	
TOLERANCES:		1609.7 LBS.	
FRACTIONAL ±		SHEET No. 1 OF 2	
ANGULAR: MACH ± 1.0 BEND ±		B	
ONE PLACE DECIMAL ±.030 [76]			
TWO PLACE DECIMAL ±.010 [26]			
THREE PLACE DECIMAL ±.005 [13]			

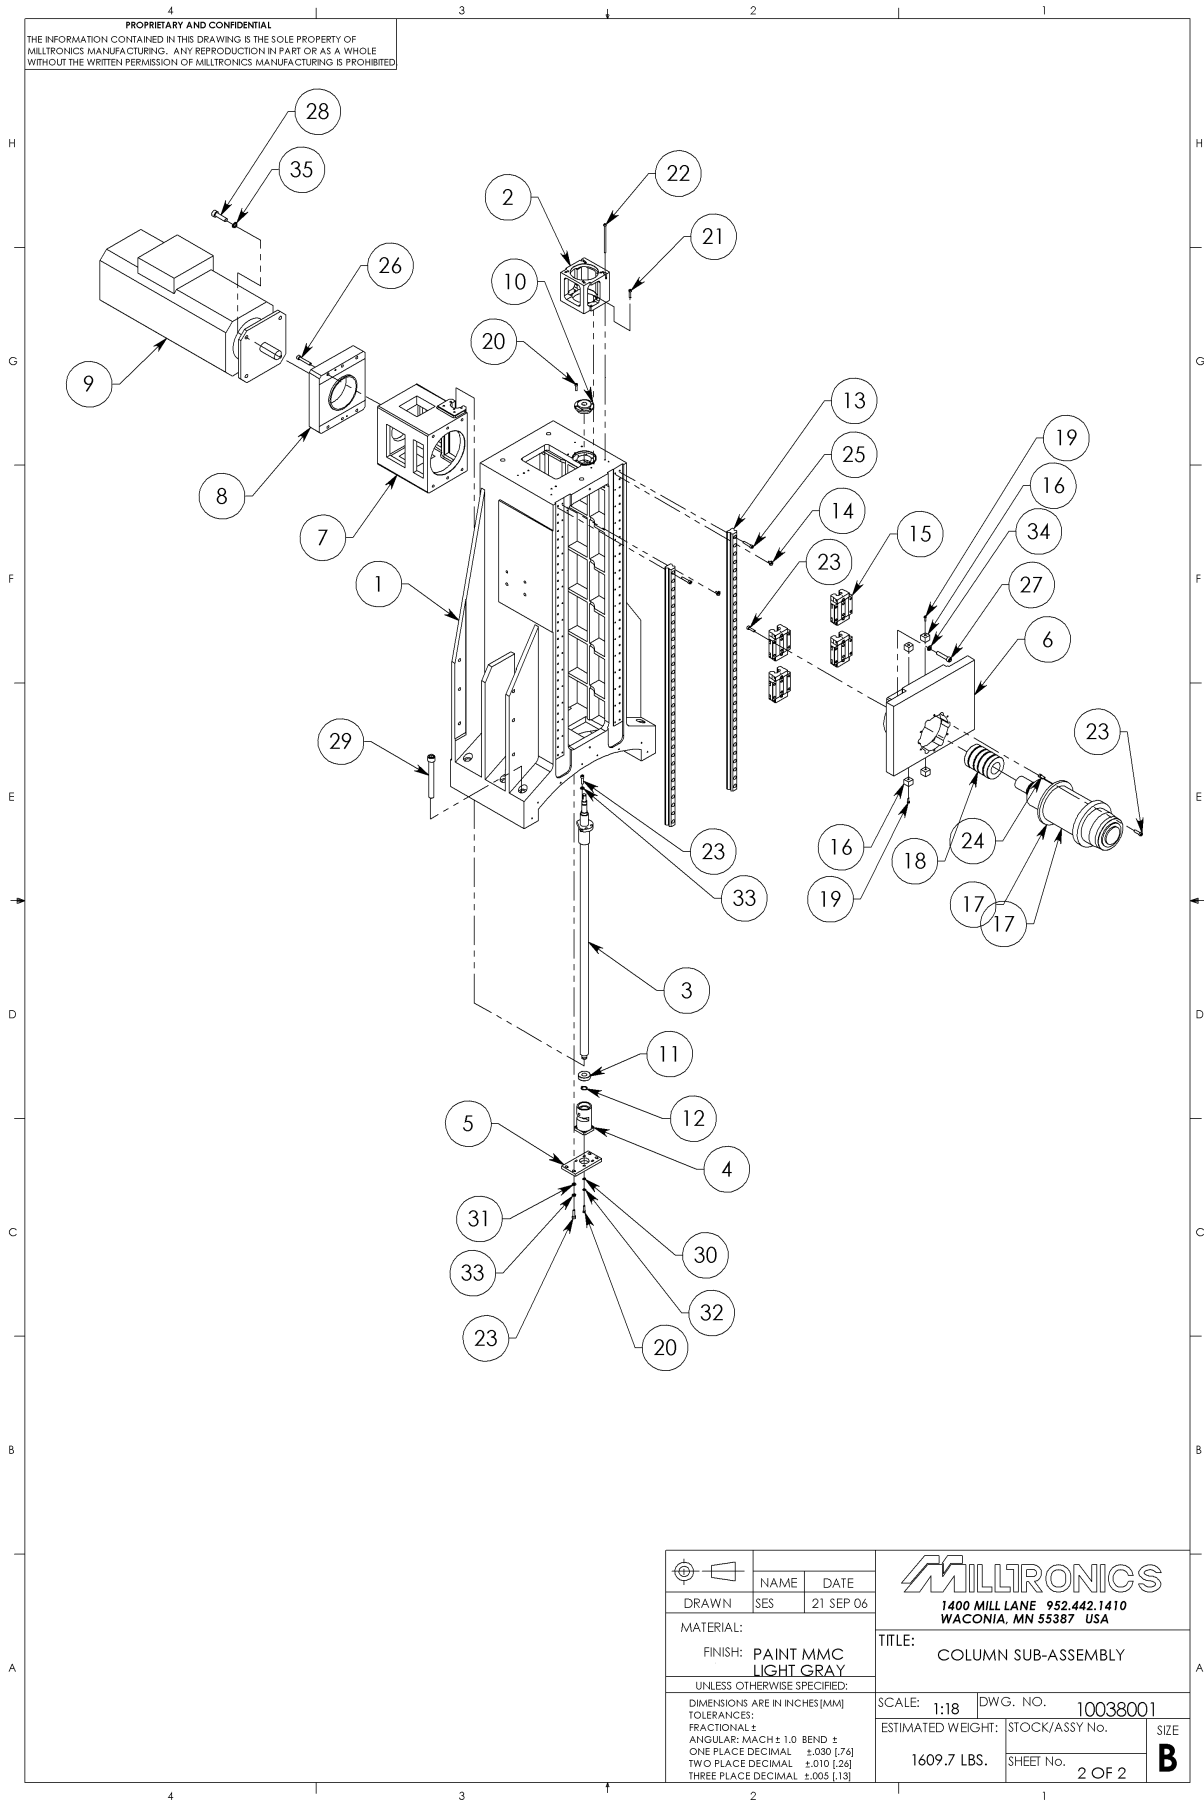



Spindle Motor Cover Assembly

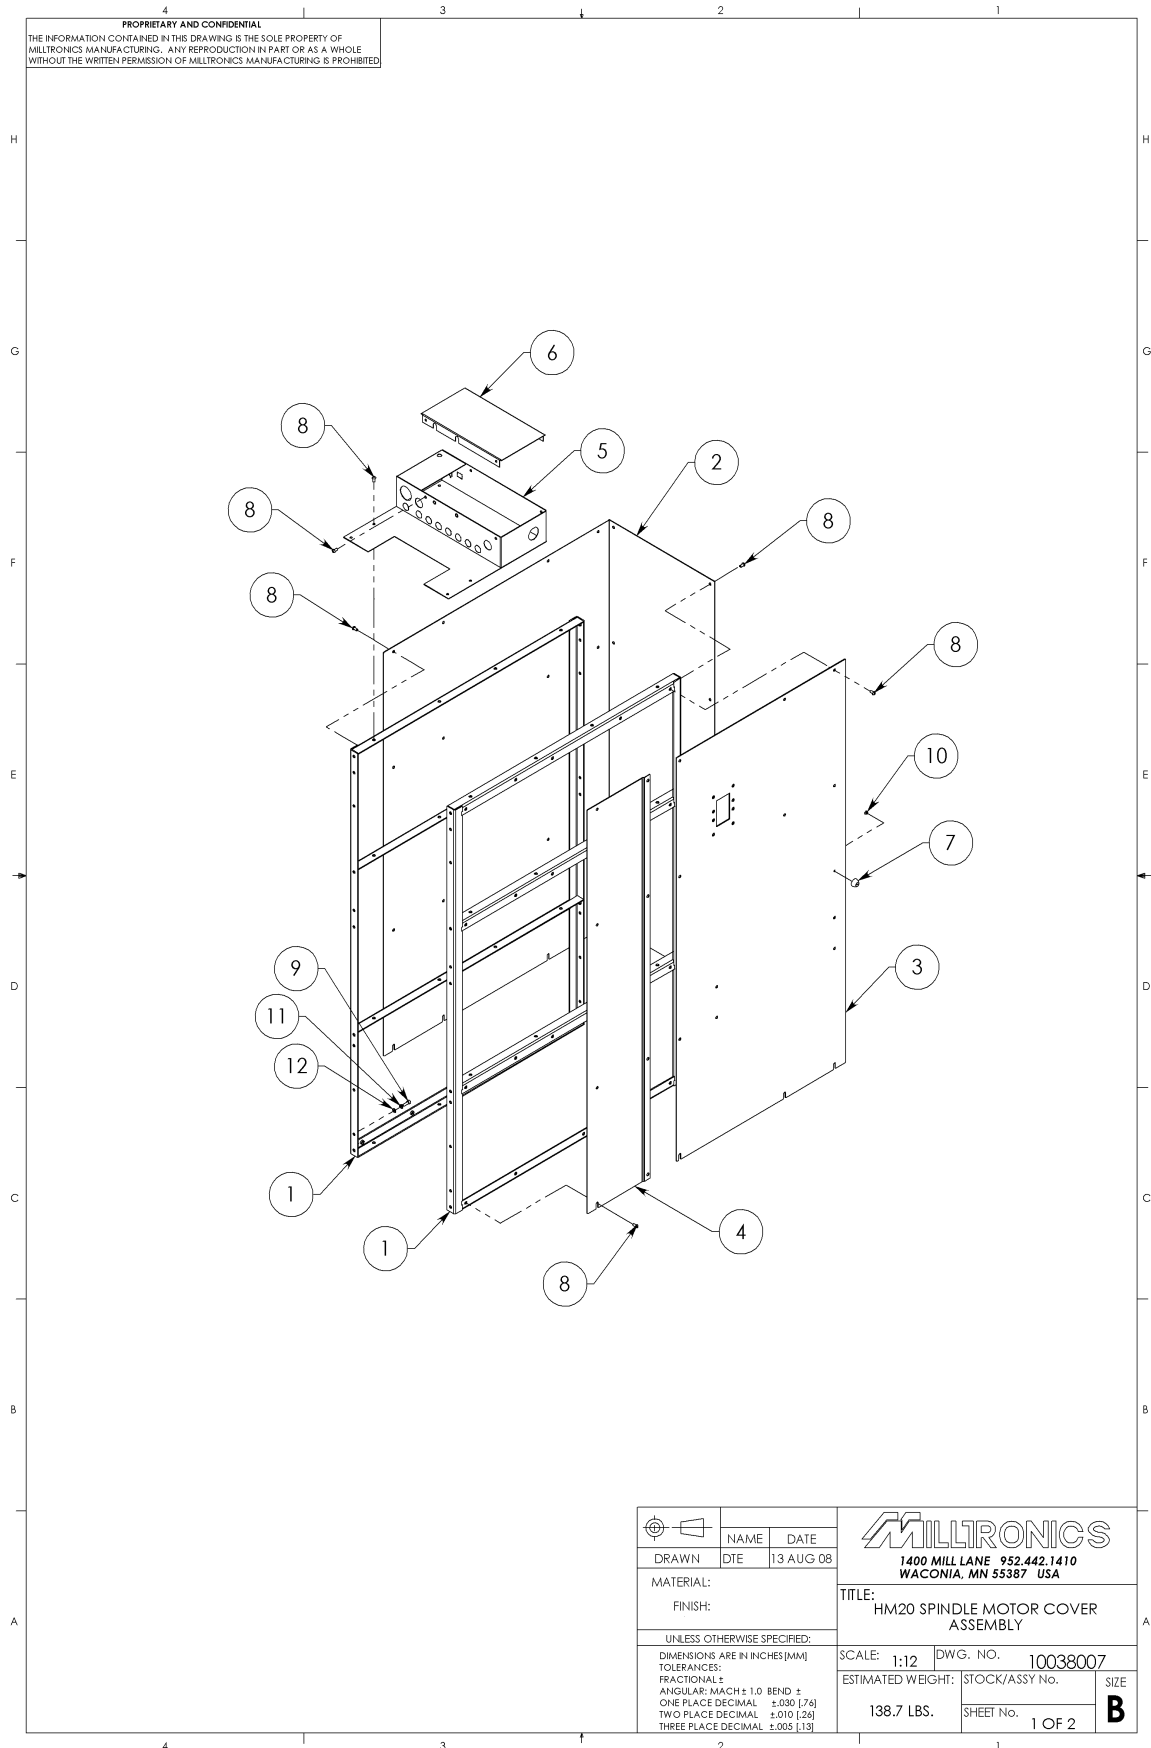

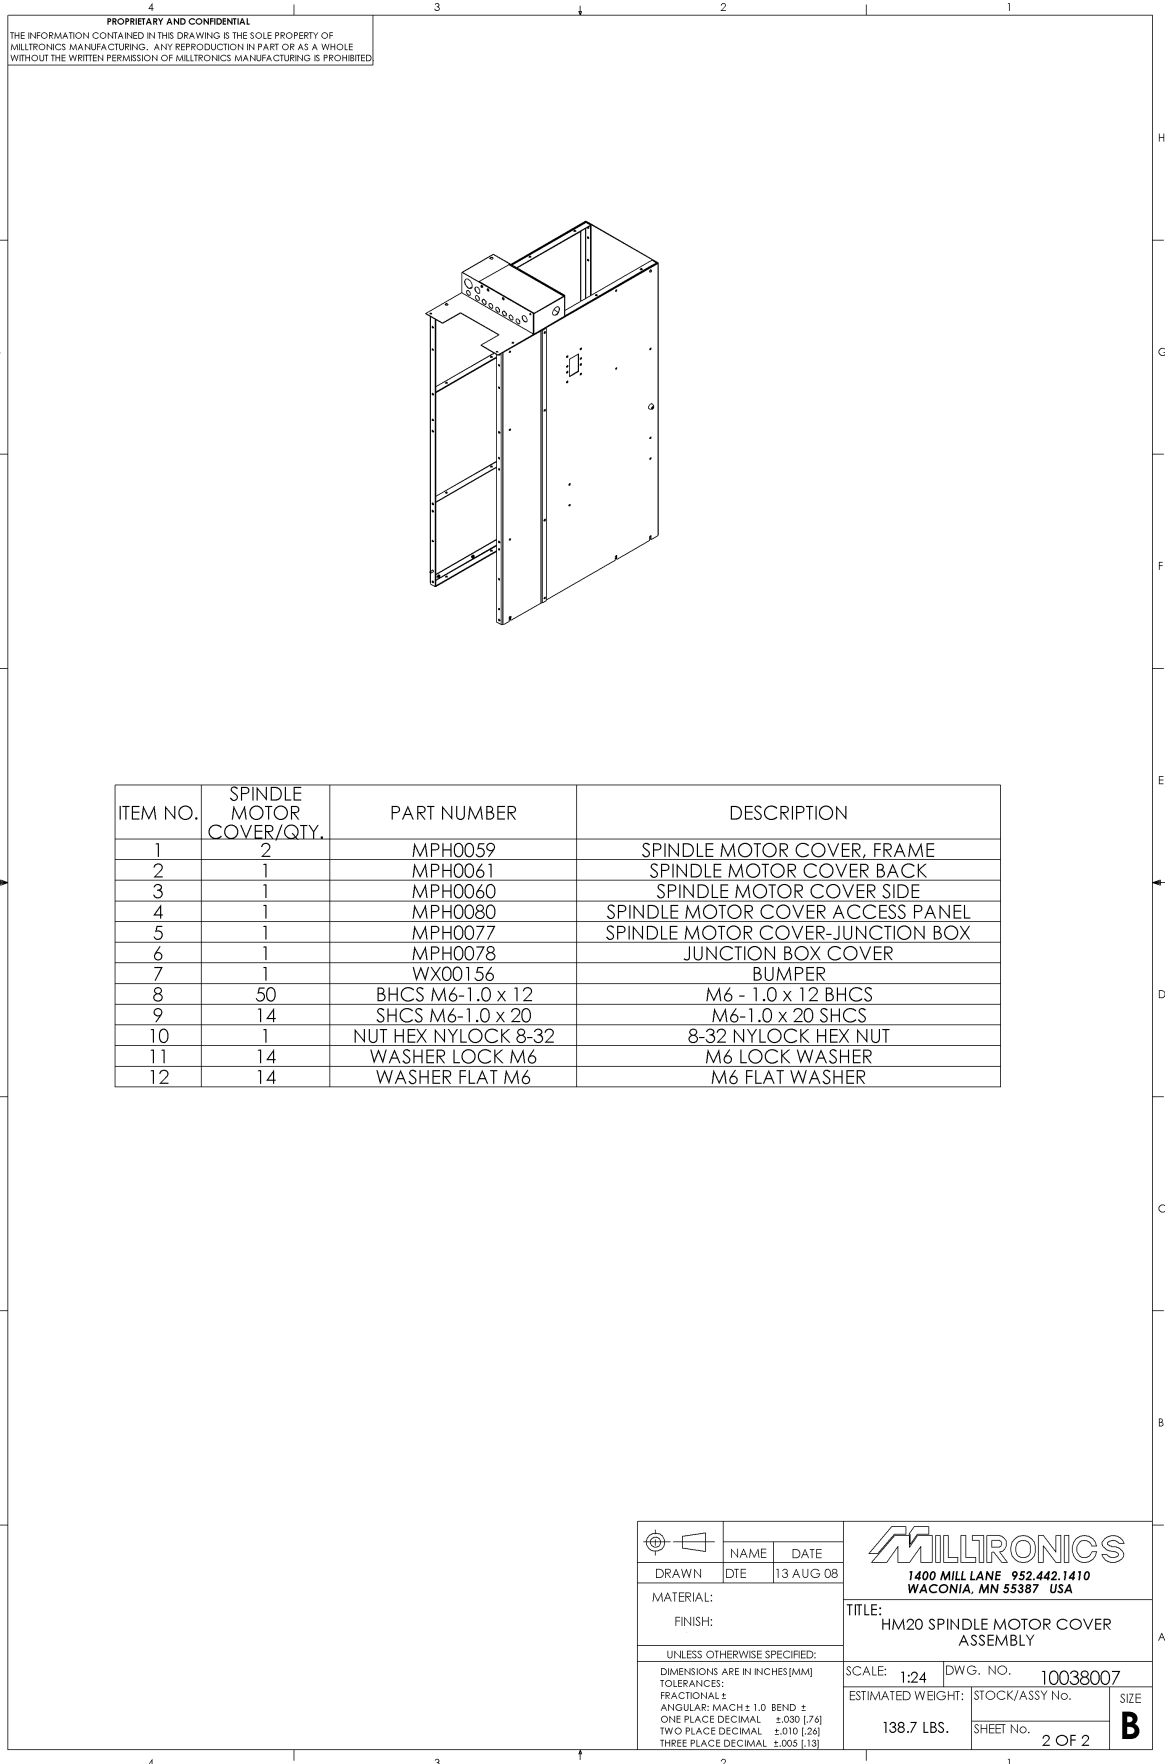



Flood Tank W/Washdown Assembly

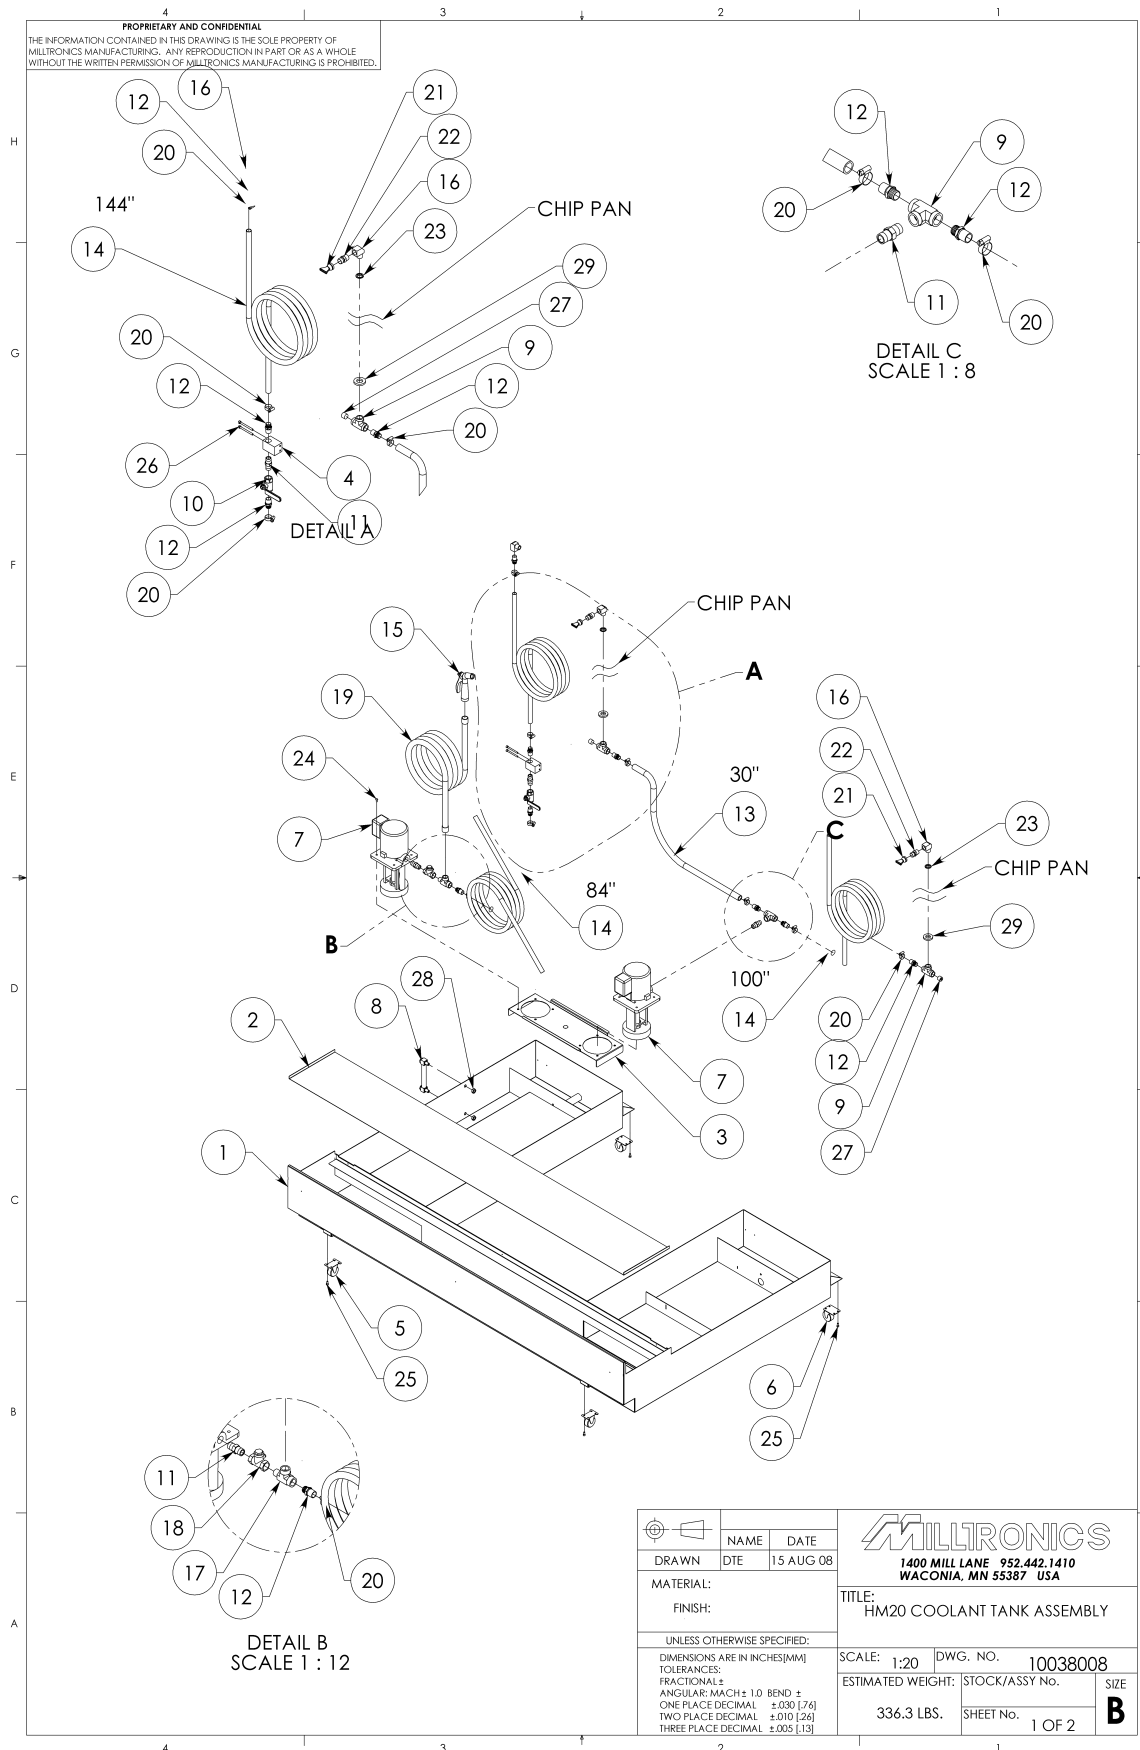

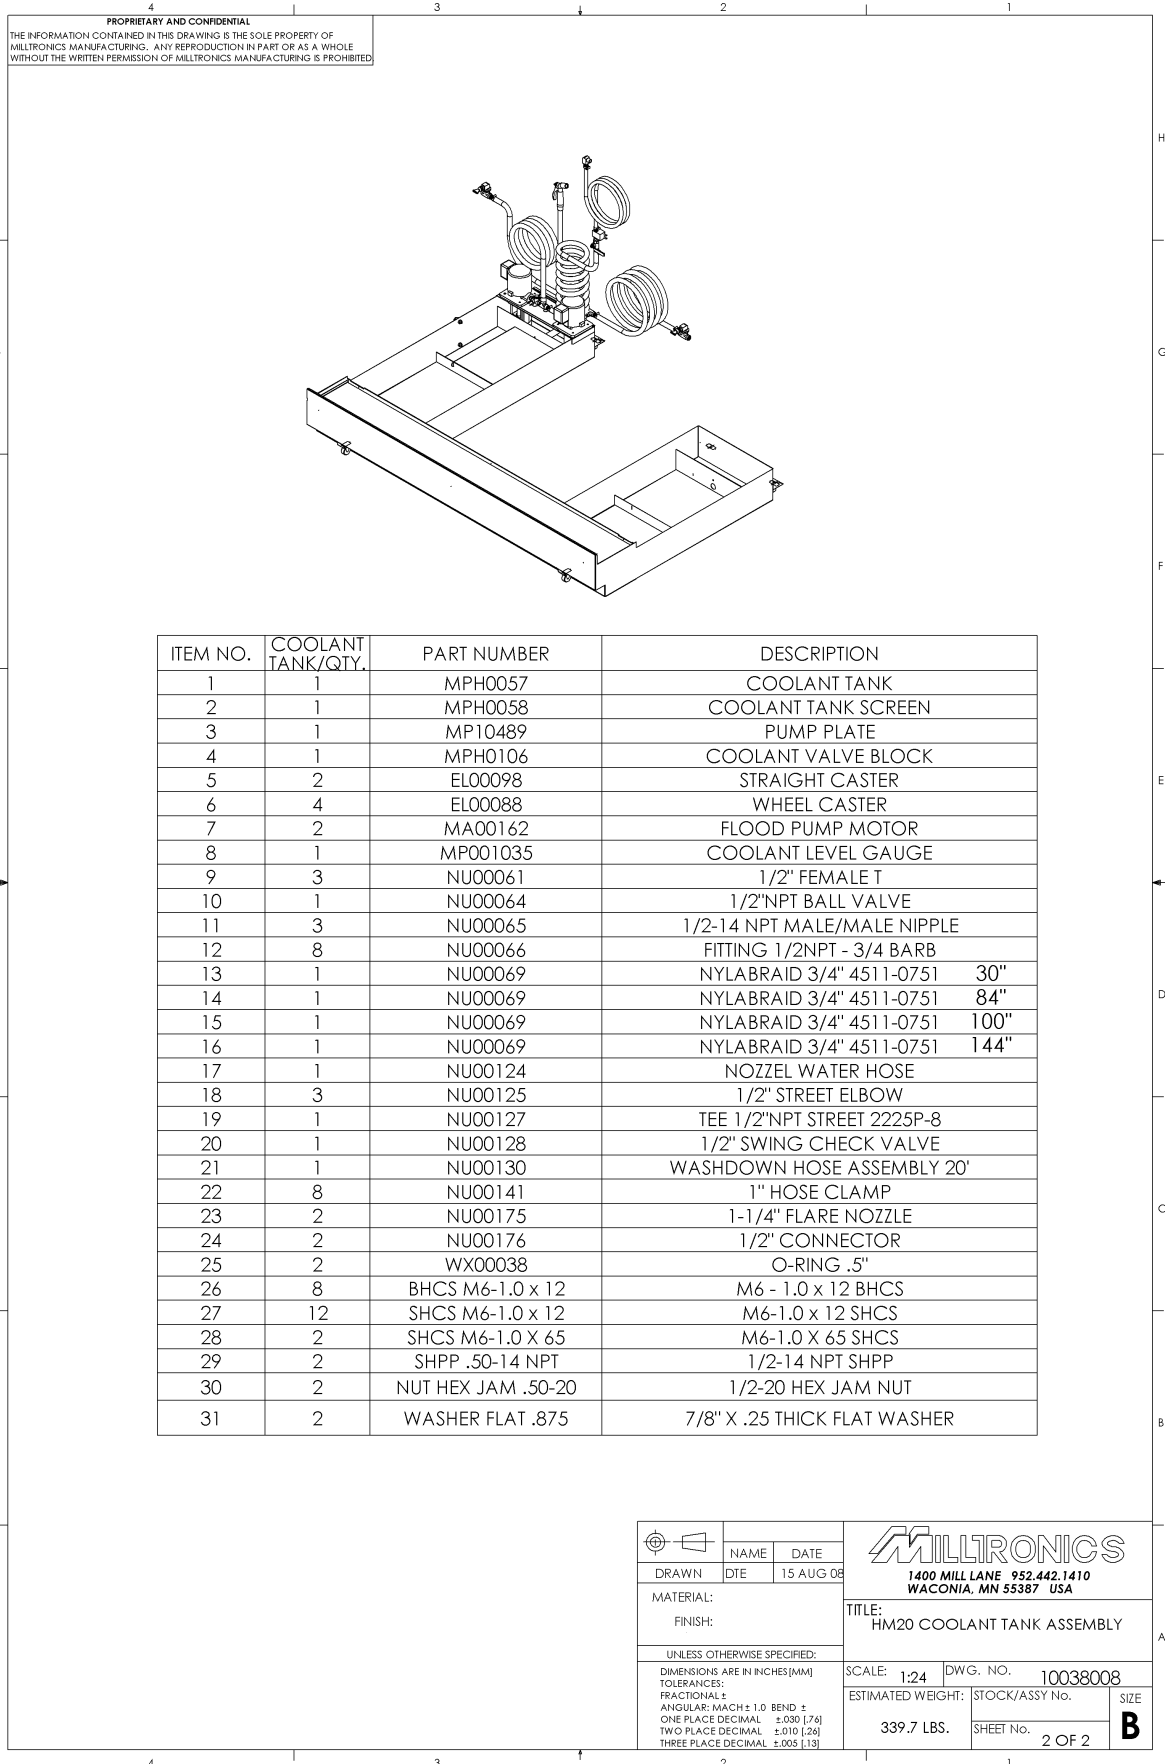

Enclosure Bottom Assembly

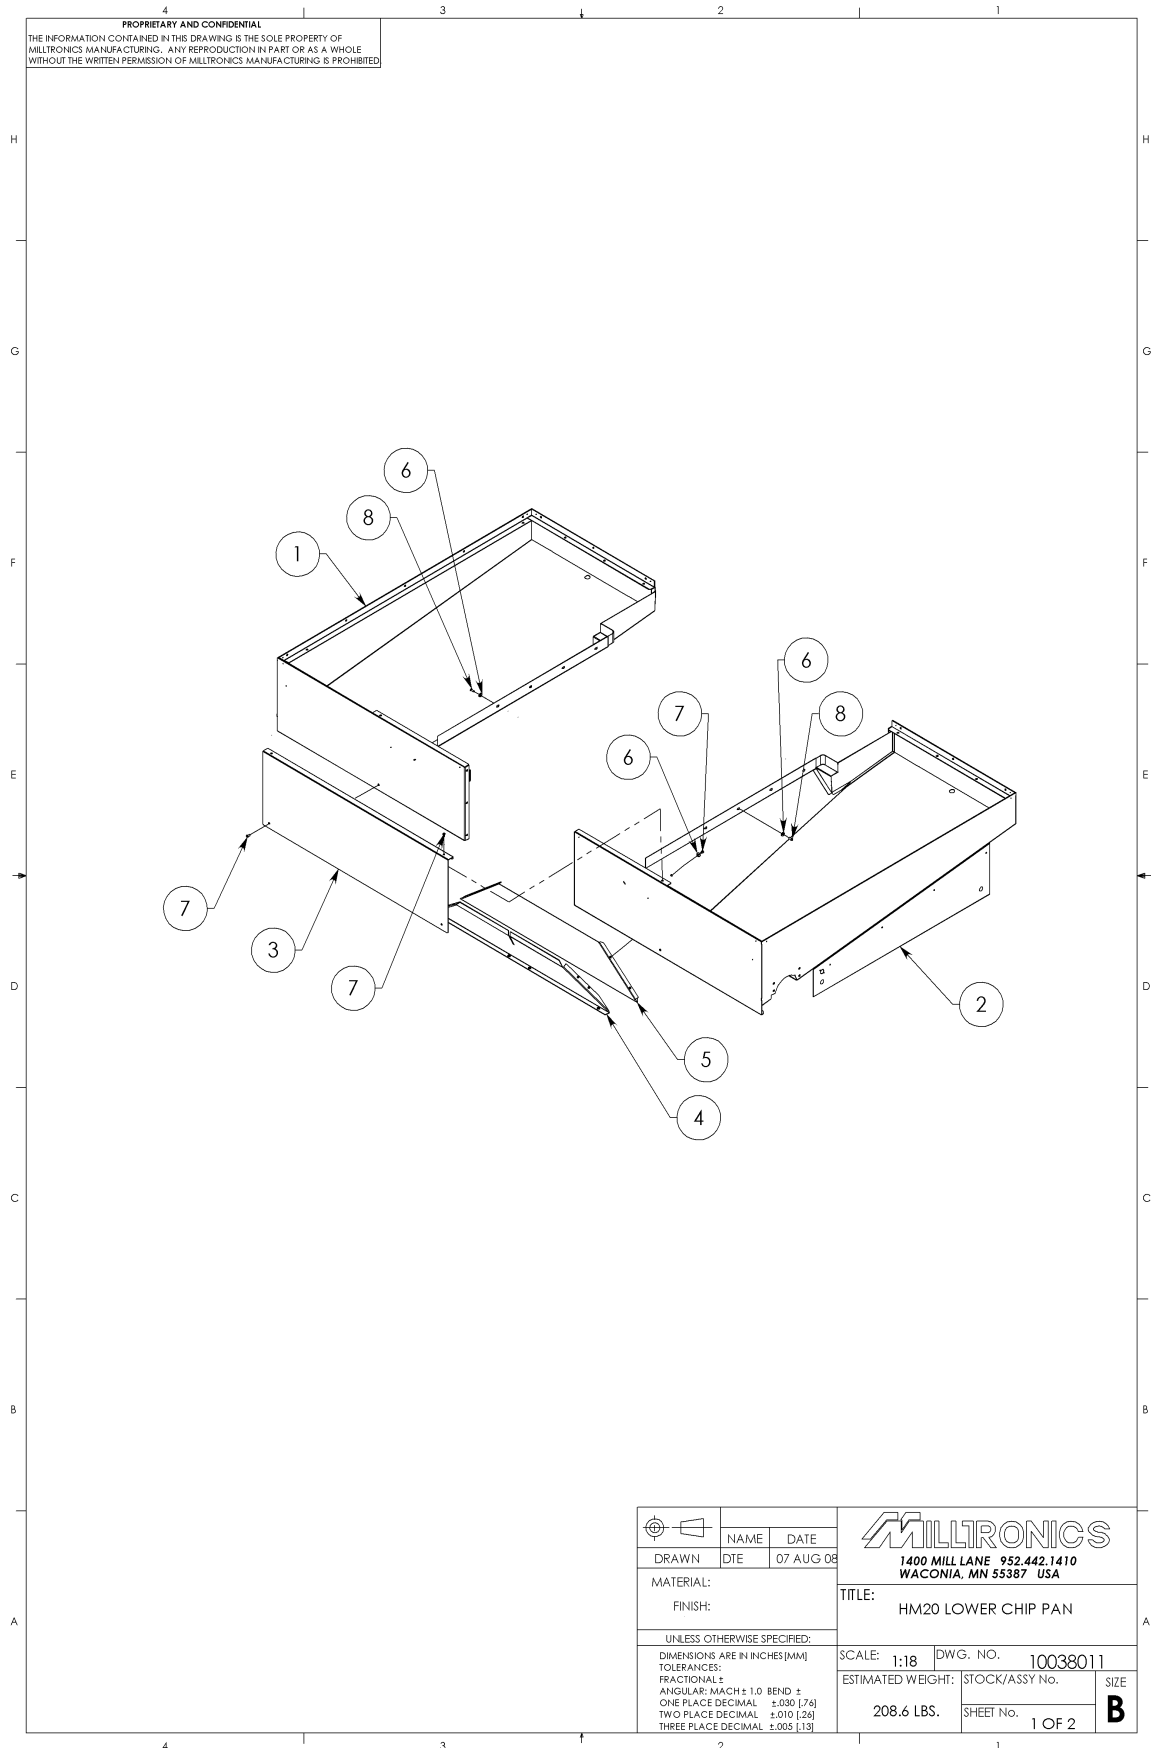


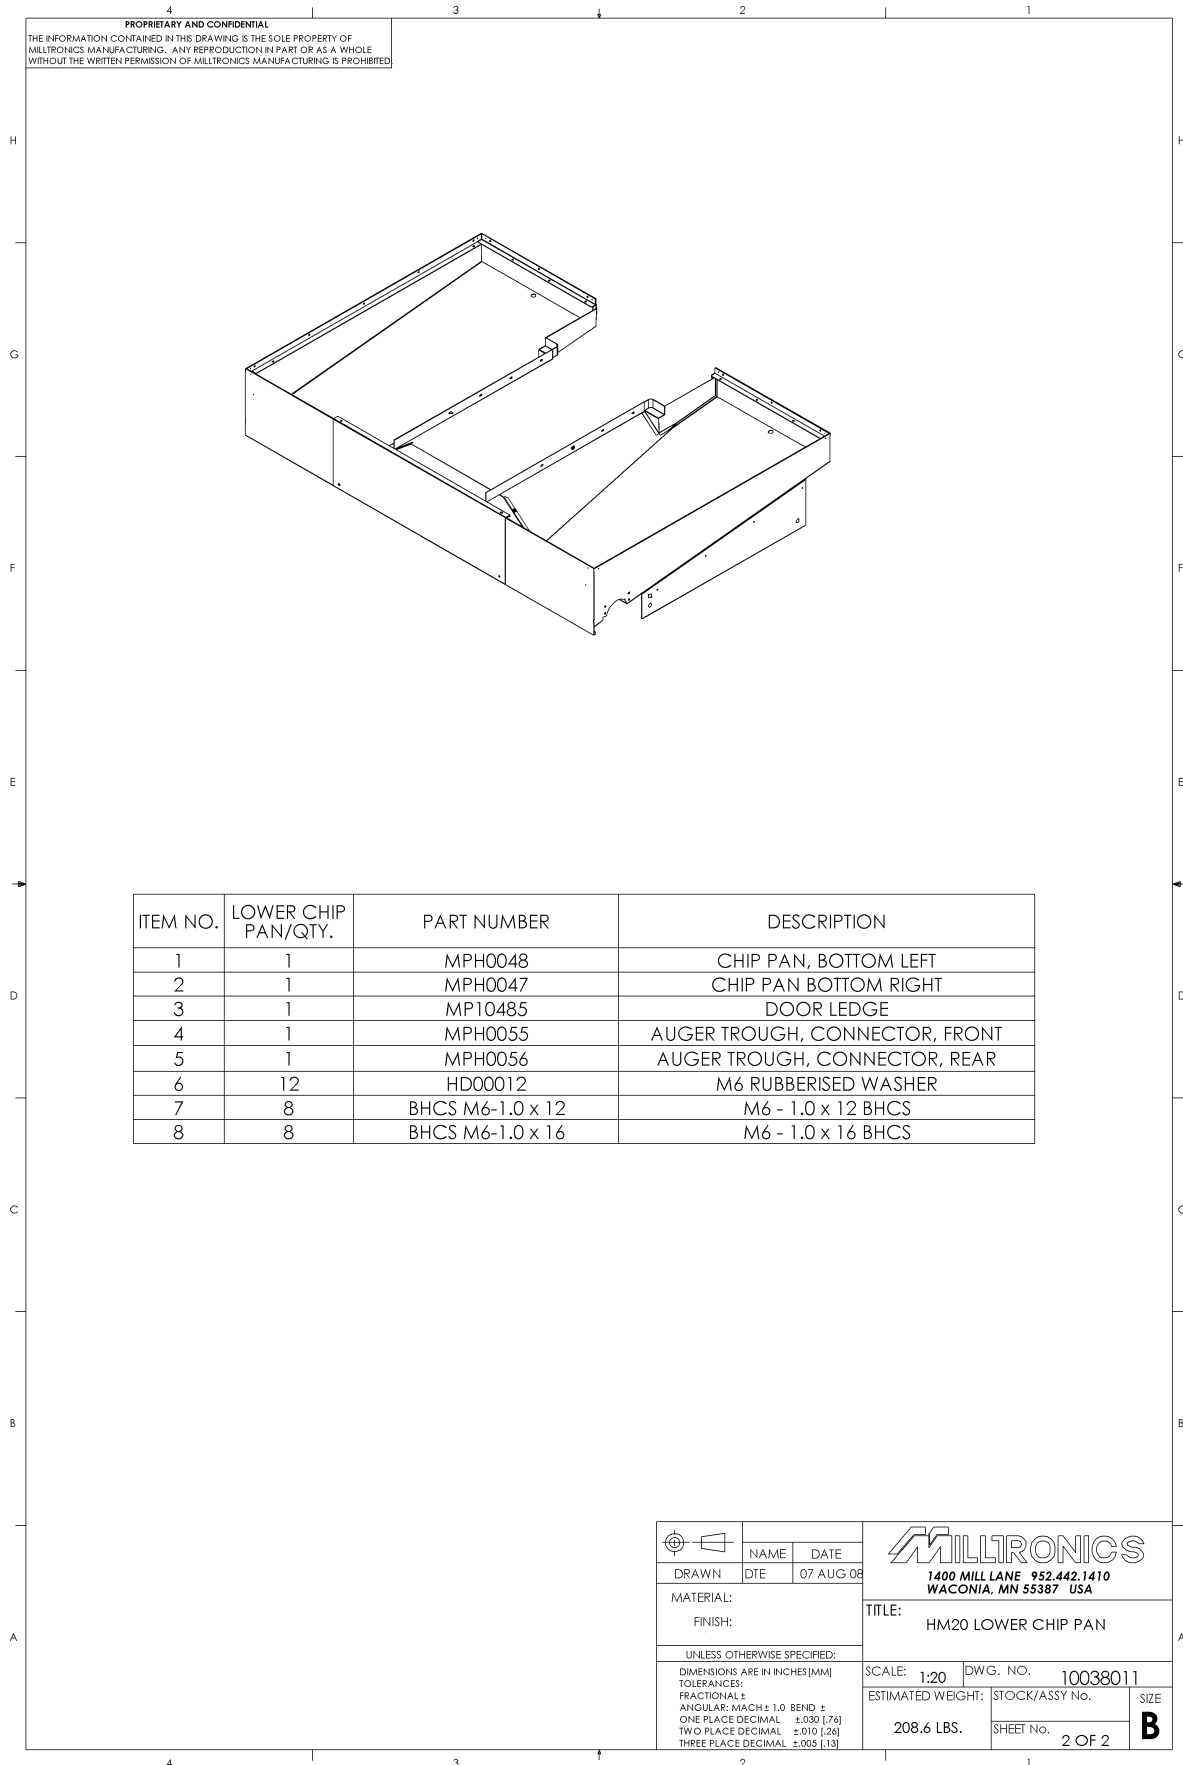


Enclosure Top Assembly

ITEM NO.	HM20 CHIP PAN/QTY.	PART NUMBER	DESCRIPTION
1	1	MPH0043	CHIP PAN RIGHT SIDE
2	1	MPH0041	CHIP PAN RIGHT TOP
3	1	MPH0040	CHIP PAN RIGHT FRONT
4	1	MPH0042	CHIP PAN RIGHT, REAR
5	1	MPH0049	CHIP PAN LEFT FRONT
6	1	MPH0053	ATC REAR DRAIN PAN
7	1	MPH0051	CHIP PAN LEFT REAR
8	1	MPH0052	CHIP PAN LEFT SIDE
9	1	MPH0050	CHIP PAN LEFT TOP
10	1	MPH0038	TOP COVER
11	1	MP60163	OPERATOR DOOR - LEXAN
12	1	MPH0079	TOP WIRE CHANNEL
13	1	MPH0071	HMC20 CHIP PAN TOP STIFFENER
14	3	MPH0079	COVER PLATE
15	2	MPH0075	REMOTE SWITCH BOX
16	61	HD00012	M6 RUBBERISED WASHER
17	8	HD00058	M5 RUBBERIZED WASHER
18	20	BHCS M5-0.8 x 10	M5-0.8 x 10 BHCS
19	97	BHCS M6-1.0 x 12	M6 - 1.0 x 12 BHCS
20	8	SHCS M6-1.0 x 20	M6-1.0 x 20 SHCS
21	8	NUT HEX M5-0.8	M5 - 0.8 NYLOCK HEX NUT
22	23	WASHER FLAT M6	M6 FLAT WASHER
23	8	WASHER LOCK M6	M6 LOCK WASHER

 DRAWN _____ DATE 07 AUG 08	NAME _____ DATE _____	 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA
	MATERIAL: _____ FINISH: _____	
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		TITLE: CHIP PAN BODY SCALE: 1:96 DWG. NO. 10038004 ESTIMATED WEIGHT: STOCK/ASSY No. _____ 495.0 LBS. SHEET No. 1 OF 2

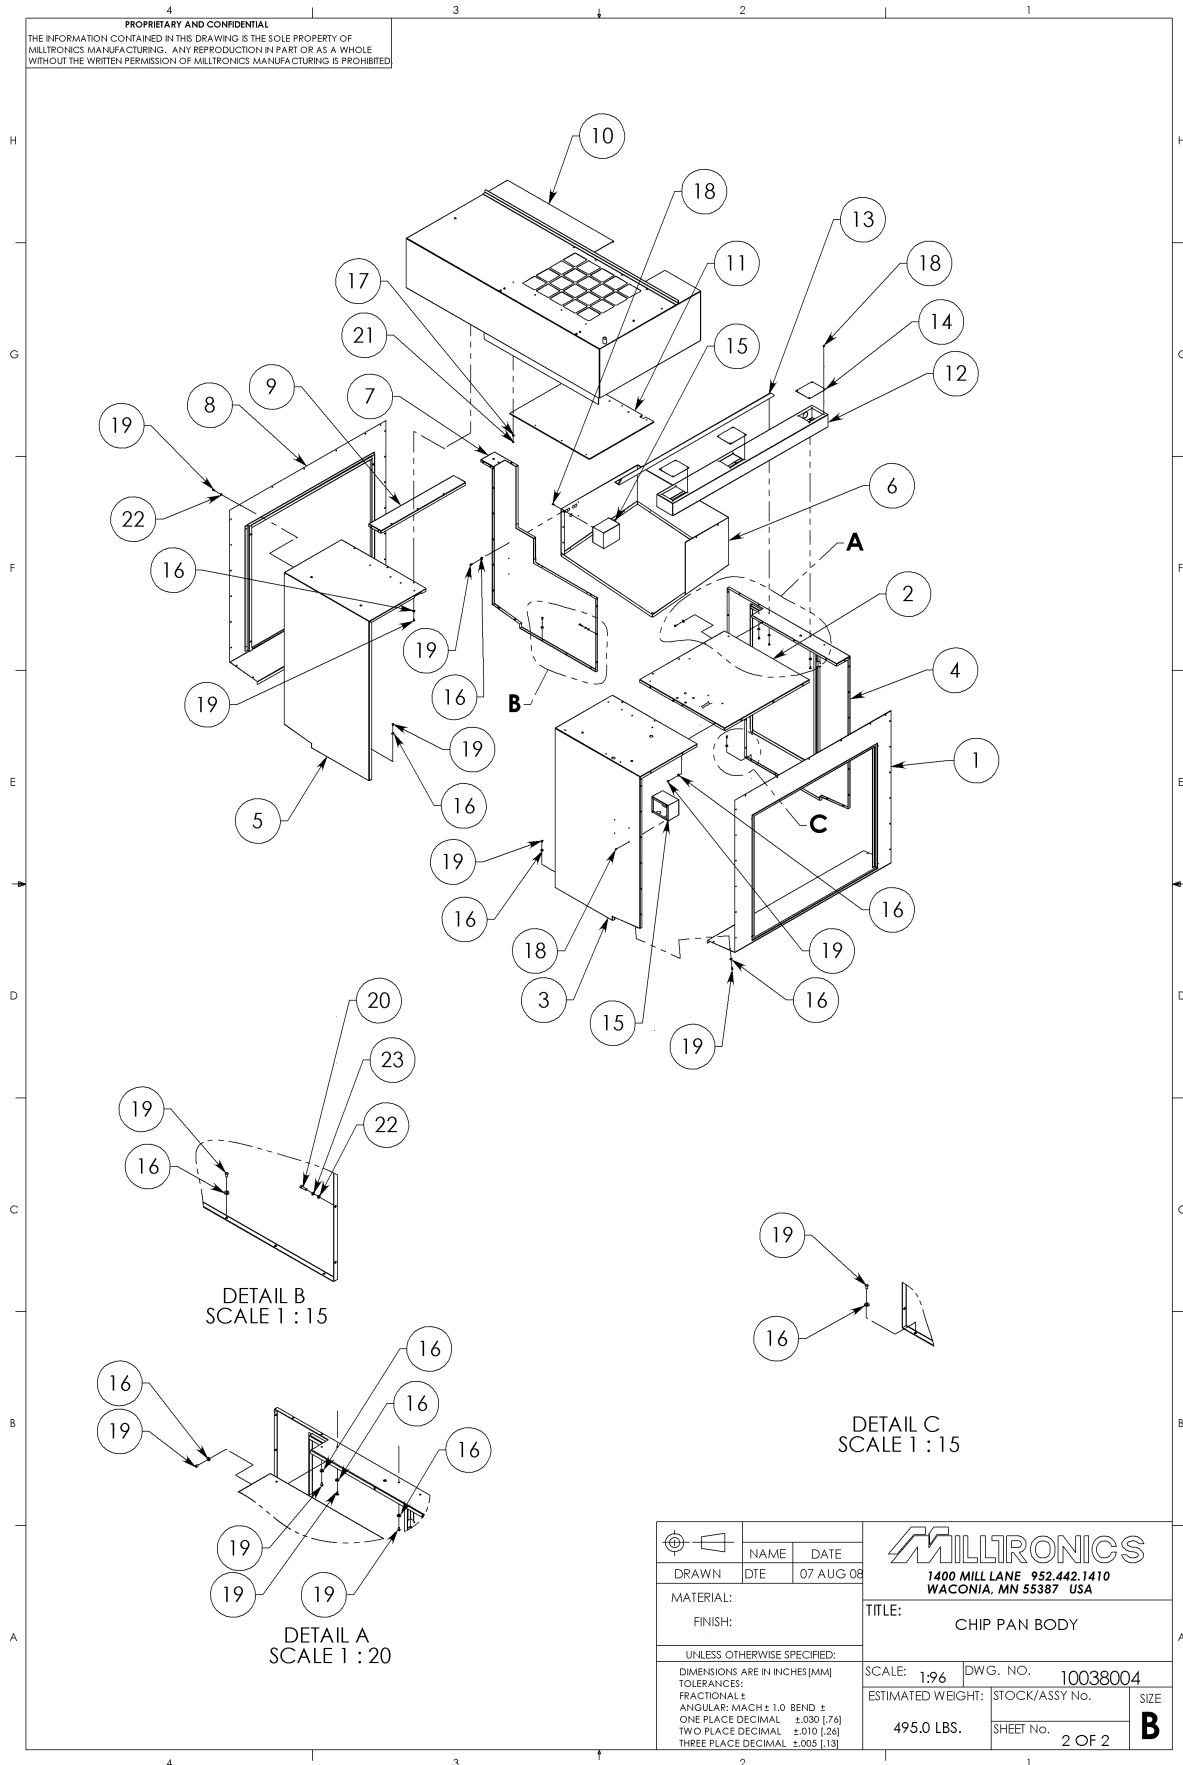


Enclosure Front Door Assembly

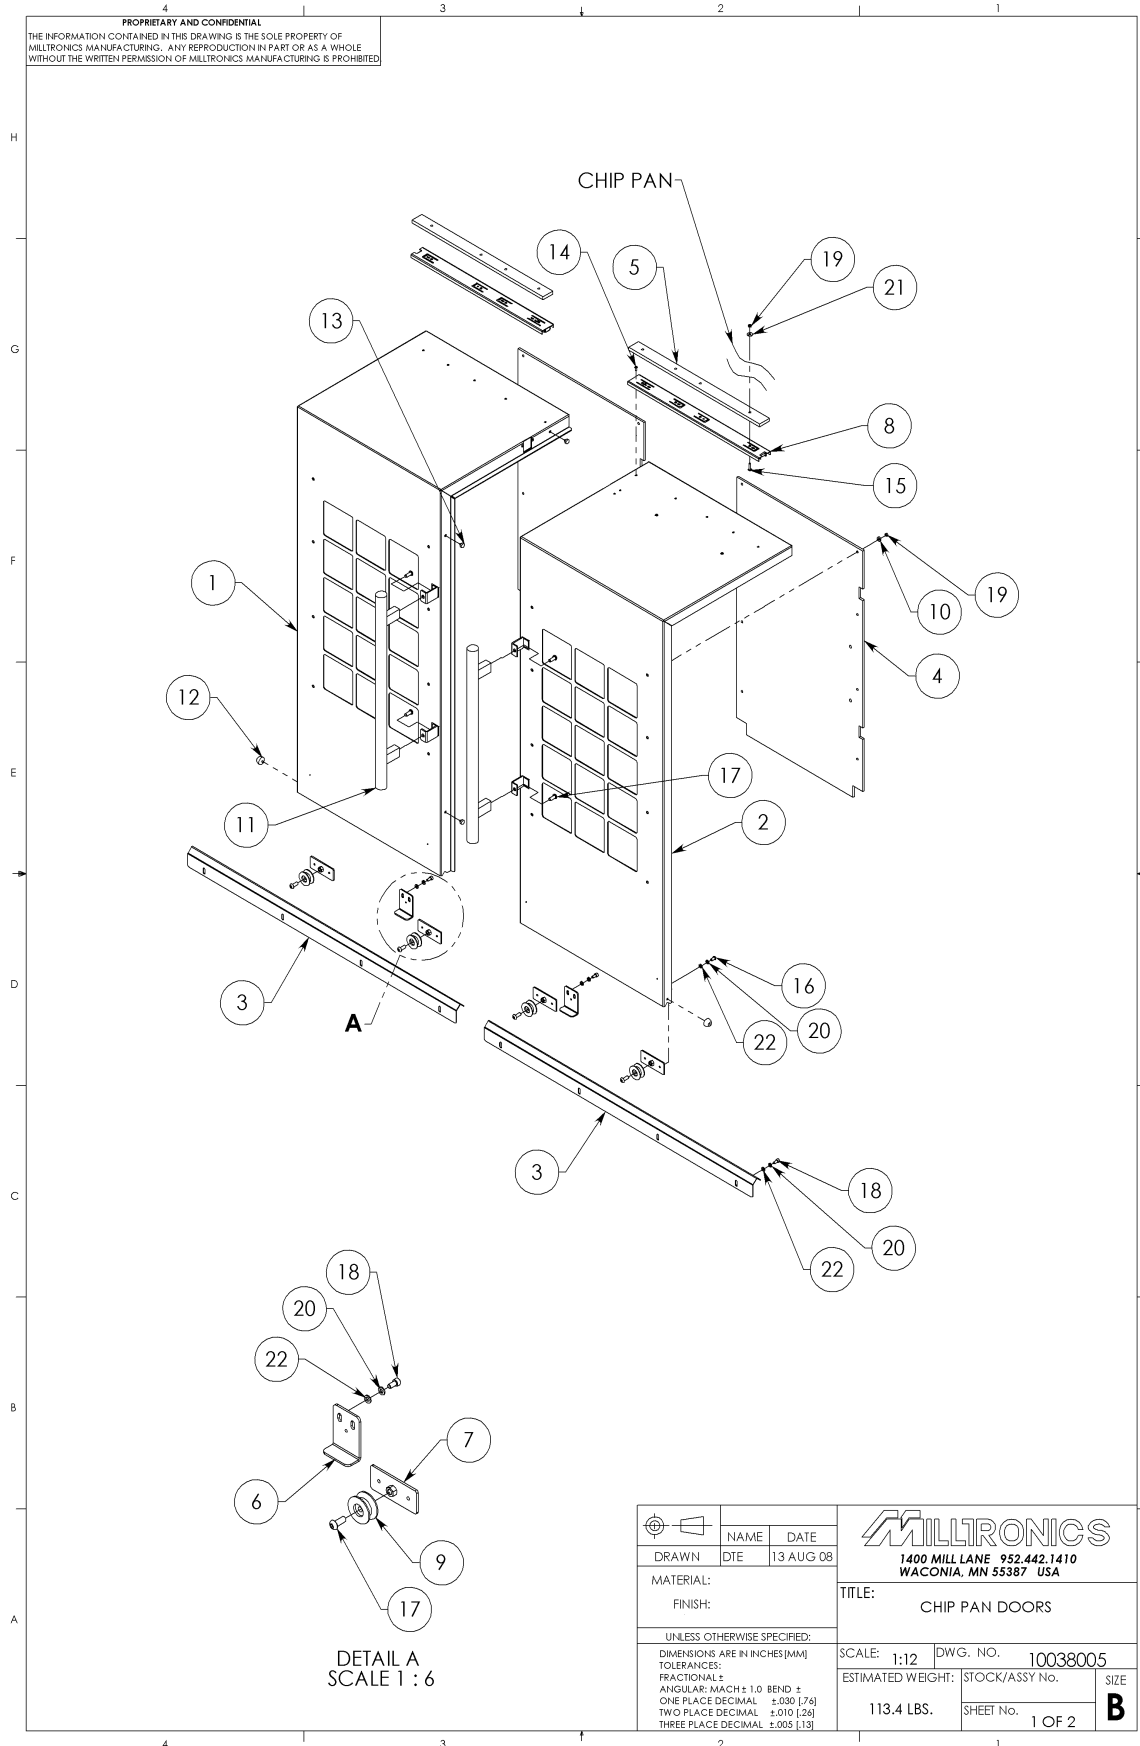

ITEM NO.	HM20 CHIP PAN/QTY.	PART NUMBER	DESCRIPTION
1	1	MPH0046	CHIP PAN, FRONT DOOR, LEFT
2	1	MPH0045	CHIP PAN, FRONT DOOR, RIGHT
3	2	MP10484	LOWER DOOR TRACK
4	2	MP00239	OPERATOR DOOR - LEXAN
5	2	MP10501	VM20 DOOR SLIDE SPACER
6	2	MP00748	DOOR STOP
7	4	MP10496	WHEEL BRACKET, FRONT DOORS
8	2	MP00838	20" K&V 100lb 8400 SLIDE
9	4	MP10495	ROLLER, VM20/RW CHIP PAN DOOR
10	1	HD00058	M5 RUBBERIZED WASHER
11	2	WX00297	HANDLE
12	2	WX00156	BUMPER
13	3	WX00310	BUMPER
14	10	BHCS M4-0.7 x 10	M4-0.7 x10 BHCS
15	8	BHCS M5-0.8 x 20	M5-0.8 x 20 BHCS
16	1	BHCS M6-1.0 x 12	M6 - 1.0 x 12 BHCS
17	8	BHCS M8-1.25 x 16	M8 - 1.25 x 16 BHCS
18	12	SHCS M6-1.0 x 12	M6-1.0 x 12 SHCS
19	24	NUT HEX M5-0.8	M5 - 0.8 NYLOCK HEX NUT
20	20	WASHER LOCK M6	M6 LOCK WASHER
21	8	WASHER FLAT M5	M5 FLAT WASHER
22	20	WASHER FLAT M6	M6 FLAT WASHER

	NAME	DATE	 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA
	DRAWN	DTE	
MATERIAL:		TITLE:	
FINISH:		CHIP PAN DOORS	
UNLESS OTHERWISE SPECIFIED:		SCALE: 1:24	DWG. NO. 10038005
DIMENSIONS ARE IN INCHES [MM] TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		ESTIMATED WEIGHT: 113.4 LBS.	STOCK/ASSY No.
		SHEET No. 2 OF 2	SIZE B

Enclosure Rear Door Assembly

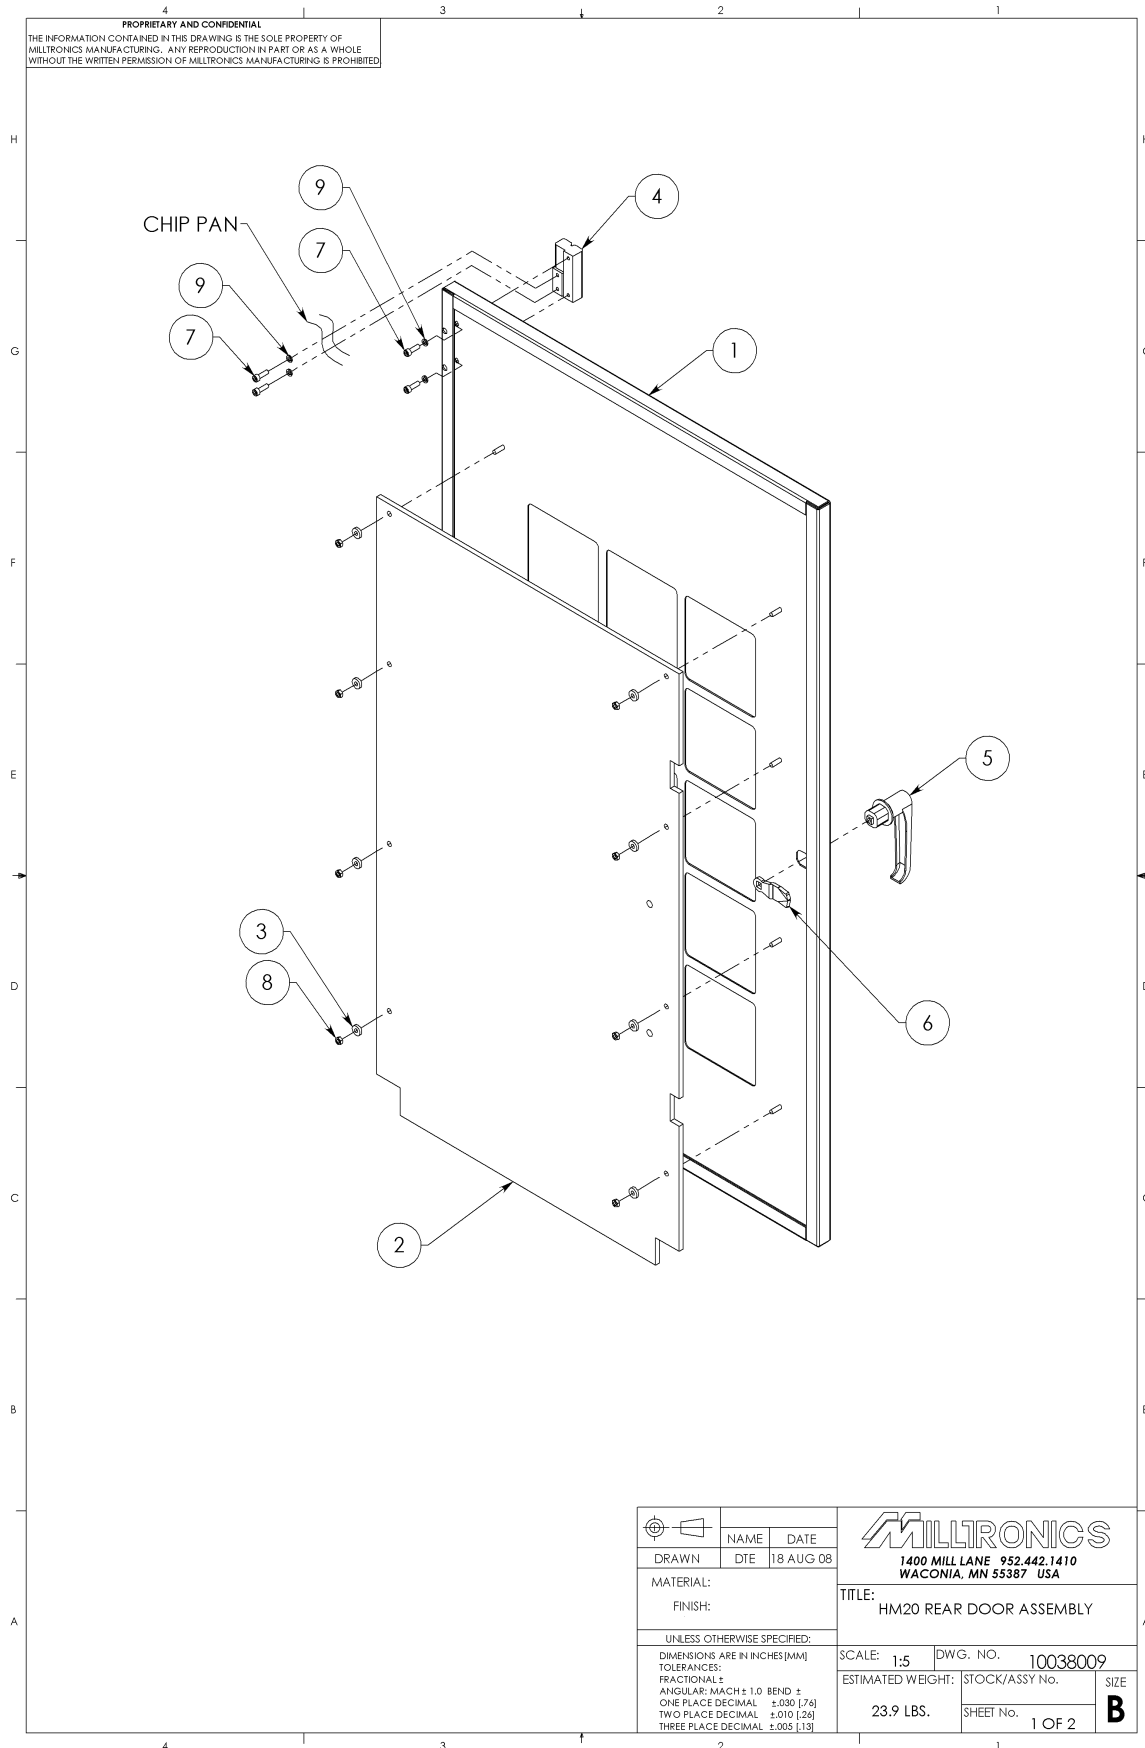

ITEM NO.	REAR DOOR/ QTY.	PART NUMBER	DESCRIPTION
1	1	MPH0044	CHIP PAN REAR DOOR
2	1	MP00239	OPERATOR DOOR - LEXAN
3	8	HD00058	M5 RUBBERIZED WASHER
4	2	WX00350	HM20 CONCEALED HINGE MOUNT
5	1	WX00348	NON LOCKING HANDLE
6	1	WX00349	1/4 TURN CAM LATCH
7	8	SHCS 10-32 x .625	10-32 x .625 SHCS
8	8	NUT HEX M5-0.8	M5 - 0.8 NYLOCK HEX NUT
9	8	WASHER LOCK #10	WASHER LOCK #10

	NAME	DATE
	DRAWN	DTE
MATERIAL:		 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA
FINISH:		
UNLESS OTHERWISE SPECIFIED:		TITLE: HM20 REAR DOOR ASSEMBLY
DIMENSIONS ARE IN INCHES [MM] TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		SCALE: 1:8 DWG. NO. 10038009 ESTIMATED WEIGHT: 23.9 LBS. STOCK/ASSY No. SHEET No. 2 OF 2
		SIZE B

4
3
2
1

PROPRIETARY AND CONFIDENTIAL


THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED

H
G
F
E
D
C
B
A


2
5
4
7
6
1
9
8
3

DRAWN		DATE	
DTE	16 SEP 08		
MATERIAL:		TITLE:	
FINISH:		HM20 SIDE DOOR ASSEMBLY	
UNLESS OTHERWISE SPECIFIED:		SCALE: 1:8 DWG. NO. 10038010	
DIMENSIONS ARE IN INCHES (MM)		ESTIMATED WEIGHT: 55.3 LBS.	
TOLERANCES:		STOCK/ASSY No.	
FRACTIONAL ±		SHEET No.	
ANGULAR: MACH ± 1.0 BEND ±		1 OF 2	
ONE PLACE DECIMAL ±.030 [.76]		SIZE B	
TWO PLACE DECIMAL ±.010 [.25]			
THREE PLACE DECIMAL ±.005 [.13]			

1400 MILL LANE 952.442.1410
WACONIA, MN 55387 USA

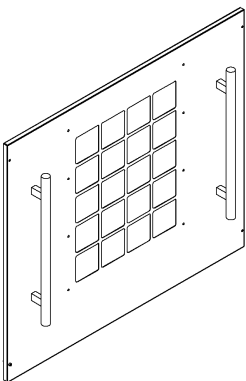PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED																																											
																																											
<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>ITEM NO.</th> <th>SIDE DOOR/QTY.</th> <th>PART NUMBER</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>1</td> <td>MP10483</td> <td>DOOR, SIDE</td> </tr> <tr> <td>2</td> <td>1</td> <td>MP60163</td> <td>OPERATOR DOOR - LEXAN</td> </tr> <tr> <td>3</td> <td>2</td> <td>WX00297</td> <td>HANDLE</td> </tr> <tr> <td>4</td> <td>8</td> <td>HD00058</td> <td>M5 RUBBERIZED WASHER</td> </tr> <tr> <td>5</td> <td>8</td> <td>NUT HEX M5-0.8</td> <td>M5 - 0.8 NYLOCK HEX NUT</td> </tr> <tr> <td>6</td> <td>4</td> <td>WASHER FLAT M8</td> <td>M8 FLAT WASHER</td> </tr> <tr> <td>7</td> <td>4</td> <td>BHCS M8-1.25 x 16</td> <td>M8-1.25 x 16 BHCS</td> </tr> <tr> <td>8</td> <td>4</td> <td>SHCS M6-1.0 x 30</td> <td>M6-1.0 x 30 SHCS</td> </tr> <tr> <td>9</td> <td>4</td> <td>NUT HEX NYLOCK M6-1.0</td> <td>M6-1.0 NYLOCK HEX NUT</td> </tr> </tbody> </table>				ITEM NO.	SIDE DOOR/QTY.	PART NUMBER	DESCRIPTION	1	1	MP10483	DOOR, SIDE	2	1	MP60163	OPERATOR DOOR - LEXAN	3	2	WX00297	HANDLE	4	8	HD00058	M5 RUBBERIZED WASHER	5	8	NUT HEX M5-0.8	M5 - 0.8 NYLOCK HEX NUT	6	4	WASHER FLAT M8	M8 FLAT WASHER	7	4	BHCS M8-1.25 x 16	M8-1.25 x 16 BHCS	8	4	SHCS M6-1.0 x 30	M6-1.0 x 30 SHCS	9	4	NUT HEX NYLOCK M6-1.0	M6-1.0 NYLOCK HEX NUT
ITEM NO.	SIDE DOOR/QTY.	PART NUMBER	DESCRIPTION																																								
1	1	MP10483	DOOR, SIDE																																								
2	1	MP60163	OPERATOR DOOR - LEXAN																																								
3	2	WX00297	HANDLE																																								
4	8	HD00058	M5 RUBBERIZED WASHER																																								
5	8	NUT HEX M5-0.8	M5 - 0.8 NYLOCK HEX NUT																																								
6	4	WASHER FLAT M8	M8 FLAT WASHER																																								
7	4	BHCS M8-1.25 x 16	M8-1.25 x 16 BHCS																																								
8	4	SHCS M6-1.0 x 30	M6-1.0 x 30 SHCS																																								
9	4	NUT HEX NYLOCK M6-1.0	M6-1.0 NYLOCK HEX NUT																																								
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 15%; text-align: center;">  </td> <td style="width: 15%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="font-size: x-small;">NAME</th> <th style="font-size: x-small;">DATE</th> </tr> <tr> <td style="font-size: x-small;">DRAWN</td> <td style="font-size: x-small;">DTE 16 SEP 08</td> </tr> </table> </td> <td style="width: 30%; text-align: center;">  1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA </td> <td style="width: 40%; vertical-align: top;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="font-size: x-small;">TITLE: HM20 SIDE DOOR ASSEMBLY</td> </tr> <tr> <td style="font-size: x-small;">SCALE: 1:16</td> <td style="font-size: x-small;">DWG. NO. 10038010</td> </tr> <tr> <td style="font-size: x-small;">ESTIMATED WEIGHT: 55.3 LBS.</td> <td style="font-size: x-small;">STOCK/ASSY No.</td> </tr> <tr> <td style="font-size: x-small;">SHEET No. 2 OF 2</td> <td style="font-size: x-small;">SIZE B</td> </tr> </table> </td> </tr> <tr> <td colspan="2" style="font-size: x-small;"> UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.25] THREE PLACE DECIMAL ±.005 [.13] </td> <td colspan="2"></td> </tr> </table>					<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="font-size: x-small;">NAME</th> <th style="font-size: x-small;">DATE</th> </tr> <tr> <td style="font-size: x-small;">DRAWN</td> <td style="font-size: x-small;">DTE 16 SEP 08</td> </tr> </table>	NAME	DATE	DRAWN	DTE 16 SEP 08	 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="font-size: x-small;">TITLE: HM20 SIDE DOOR ASSEMBLY</td> </tr> <tr> <td style="font-size: x-small;">SCALE: 1:16</td> <td style="font-size: x-small;">DWG. NO. 10038010</td> </tr> <tr> <td style="font-size: x-small;">ESTIMATED WEIGHT: 55.3 LBS.</td> <td style="font-size: x-small;">STOCK/ASSY No.</td> </tr> <tr> <td style="font-size: x-small;">SHEET No. 2 OF 2</td> <td style="font-size: x-small;">SIZE B</td> </tr> </table>	TITLE: HM20 SIDE DOOR ASSEMBLY		SCALE: 1:16	DWG. NO. 10038010	ESTIMATED WEIGHT: 55.3 LBS.	STOCK/ASSY No.	SHEET No. 2 OF 2	SIZE B	UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.25] THREE PLACE DECIMAL ±.005 [.13]																							
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <th style="font-size: x-small;">NAME</th> <th style="font-size: x-small;">DATE</th> </tr> <tr> <td style="font-size: x-small;">DRAWN</td> <td style="font-size: x-small;">DTE 16 SEP 08</td> </tr> </table>	NAME	DATE	DRAWN	DTE 16 SEP 08	 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td colspan="2" style="font-size: x-small;">TITLE: HM20 SIDE DOOR ASSEMBLY</td> </tr> <tr> <td style="font-size: x-small;">SCALE: 1:16</td> <td style="font-size: x-small;">DWG. NO. 10038010</td> </tr> <tr> <td style="font-size: x-small;">ESTIMATED WEIGHT: 55.3 LBS.</td> <td style="font-size: x-small;">STOCK/ASSY No.</td> </tr> <tr> <td style="font-size: x-small;">SHEET No. 2 OF 2</td> <td style="font-size: x-small;">SIZE B</td> </tr> </table>	TITLE: HM20 SIDE DOOR ASSEMBLY		SCALE: 1:16	DWG. NO. 10038010	ESTIMATED WEIGHT: 55.3 LBS.	STOCK/ASSY No.	SHEET No. 2 OF 2	SIZE B																												
NAME	DATE																																										
DRAWN	DTE 16 SEP 08																																										
TITLE: HM20 SIDE DOOR ASSEMBLY																																											
SCALE: 1:16	DWG. NO. 10038010																																										
ESTIMATED WEIGHT: 55.3 LBS.	STOCK/ASSY No.																																										
SHEET No. 2 OF 2	SIZE B																																										
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.25] THREE PLACE DECIMAL ±.005 [.13]																																											


Chip Auger Assembly

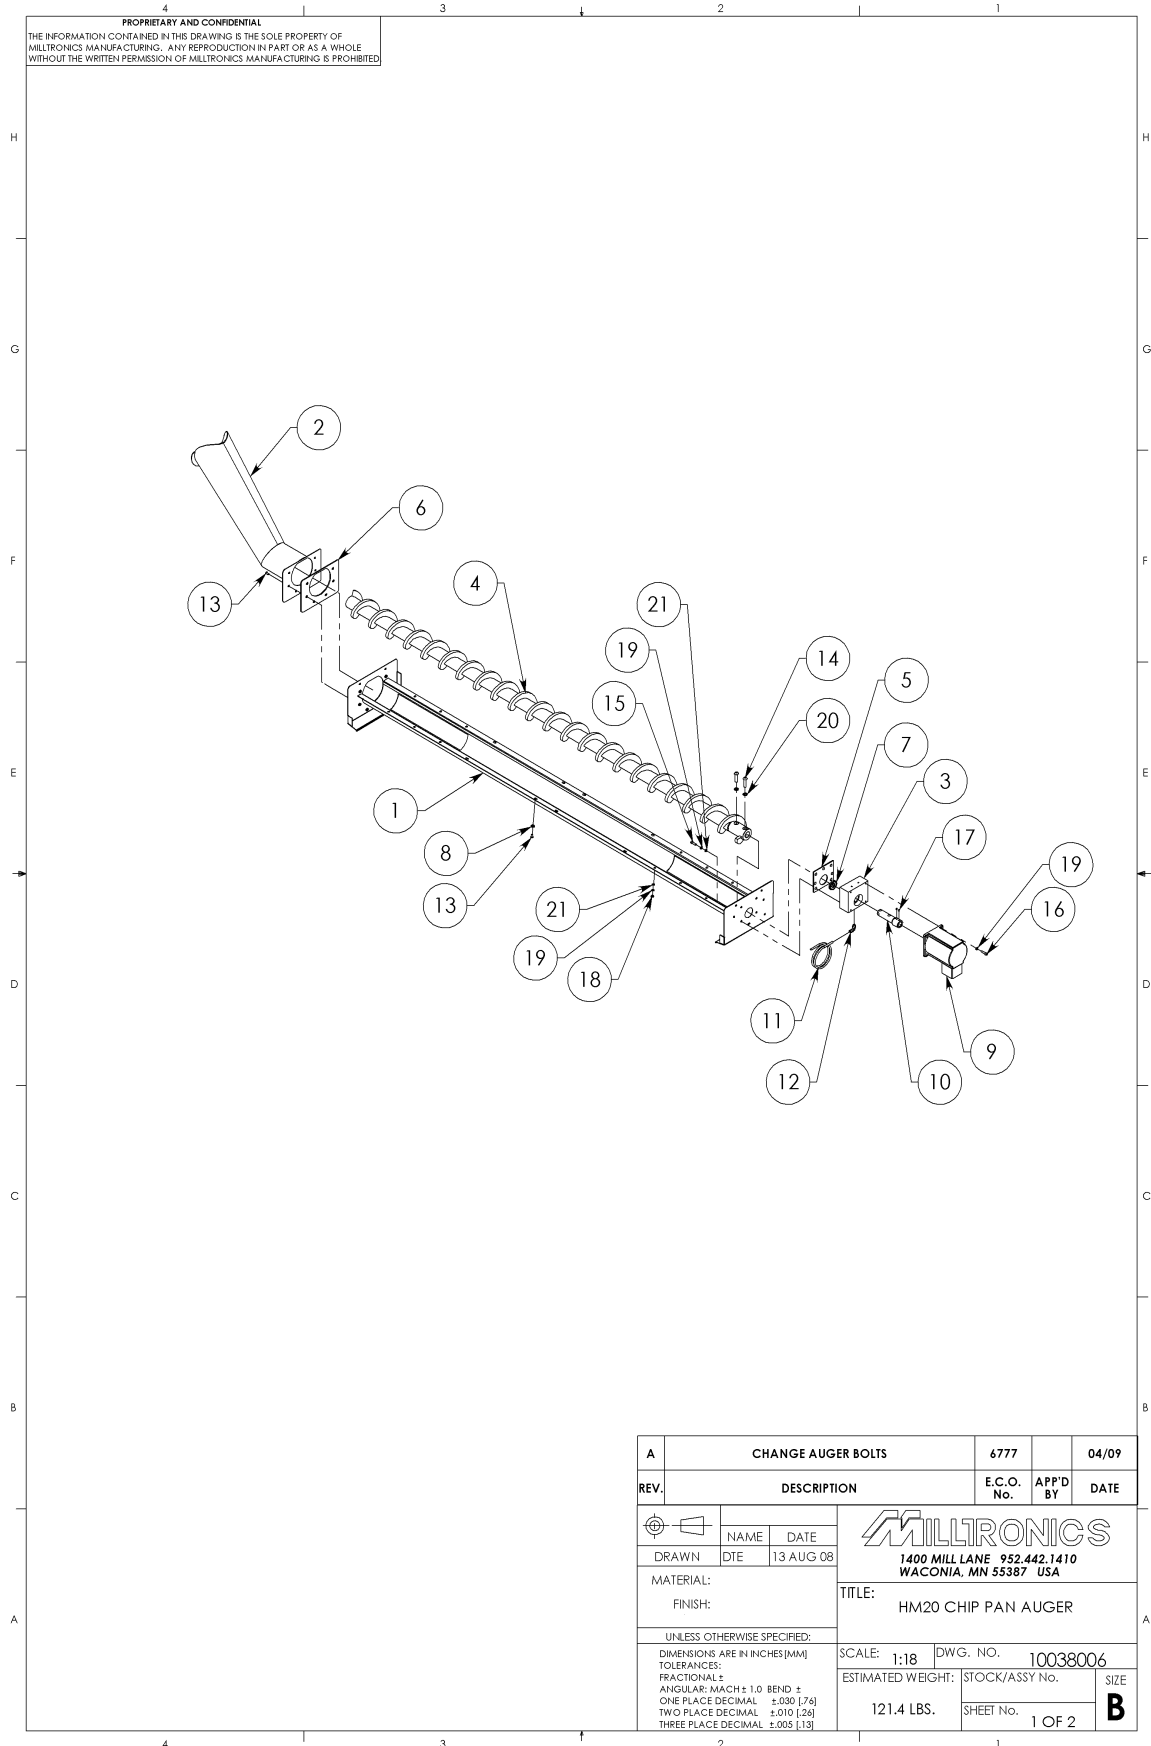


ITEM NO.	QTY	PART NUMBER	DESCRIPTION
1	1	MPH0054	AUGER TROUGH
2	1	MP00757	AUGER CHUTE
3	1	MP00440	BROTHER AUGER MOTOR MOUNTING BRACKET
4	1	MP00440	4" DIA. AUGER
5	1	WX00313	AUGER MOTOR PLATE GASKET
6	1	WX00361	AUGER CHUTE GASKET - (MP00757)
7	1	BG00069	BEARING CUP OIL SEAL
8	8	HD00012	M6 RUBBERIZED WASHER
9	1	MO00120	AUGER MOTOR
10	1	MP00441	BROTHER AUGER DRIVE SHAFT
11	1	NU00025	1/4" NYLON TUBING (12" LENGTH)
12	1	NU00171	ELBOW - M/S 1/4 TUBE x 1/4NPT
13	14	BHCS M6-1.0 x 12	M6 - 1.0 x 12mm BHCS
14	2	BHCS M10-1.5 x 40	M10-1.5 x 40mm BHCS
15	4	SHCS M6-1.0 x 20	M6-1.0 x 20mm SHCS
16	4	SHCS M6-1.0 x 25	M6-1.0 x 25mm SHCS
17	2	SHSS 10-32 x .25	10-32 x .25 SHSS
18	12	NUT HEX NYLOCK M6-1.0	M6-1.0 NYLOCK HEX NUT
19	20	WASHER LOCK M6	M6 LOCK WASHER
20	2	WASHER LOCK M10	M10 LOCK WASHER
21	16	WASHER FLAT M6	M6 FLAT WASHER

A	CHANGE AUGER BOLTS	6777	-	04/09
REV.	DESCRIPTION	E.C.O. No.	APP'D BY	DATE
NAME DATE DRAWN: DTE 13 AUG 08		 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA		
MATERIAL:		TITLE: HM20 CHIP PAN AUGER		
FINISH:				
UNLESS OTHERWISE SPECIFIED:				
DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 (.76) TWO PLACE DECIMAL ±.010 (.26) THREE PLACE DECIMAL ±.005 (.13)		SCALE: 1:32	DWG. NO. 10038006	B SIZE 2 OF 2
		ESTIMATED WEIGHT: 121.4 LBS.	STOCK/ASSY No.	

Enclosure Swivel Monitor Assembly

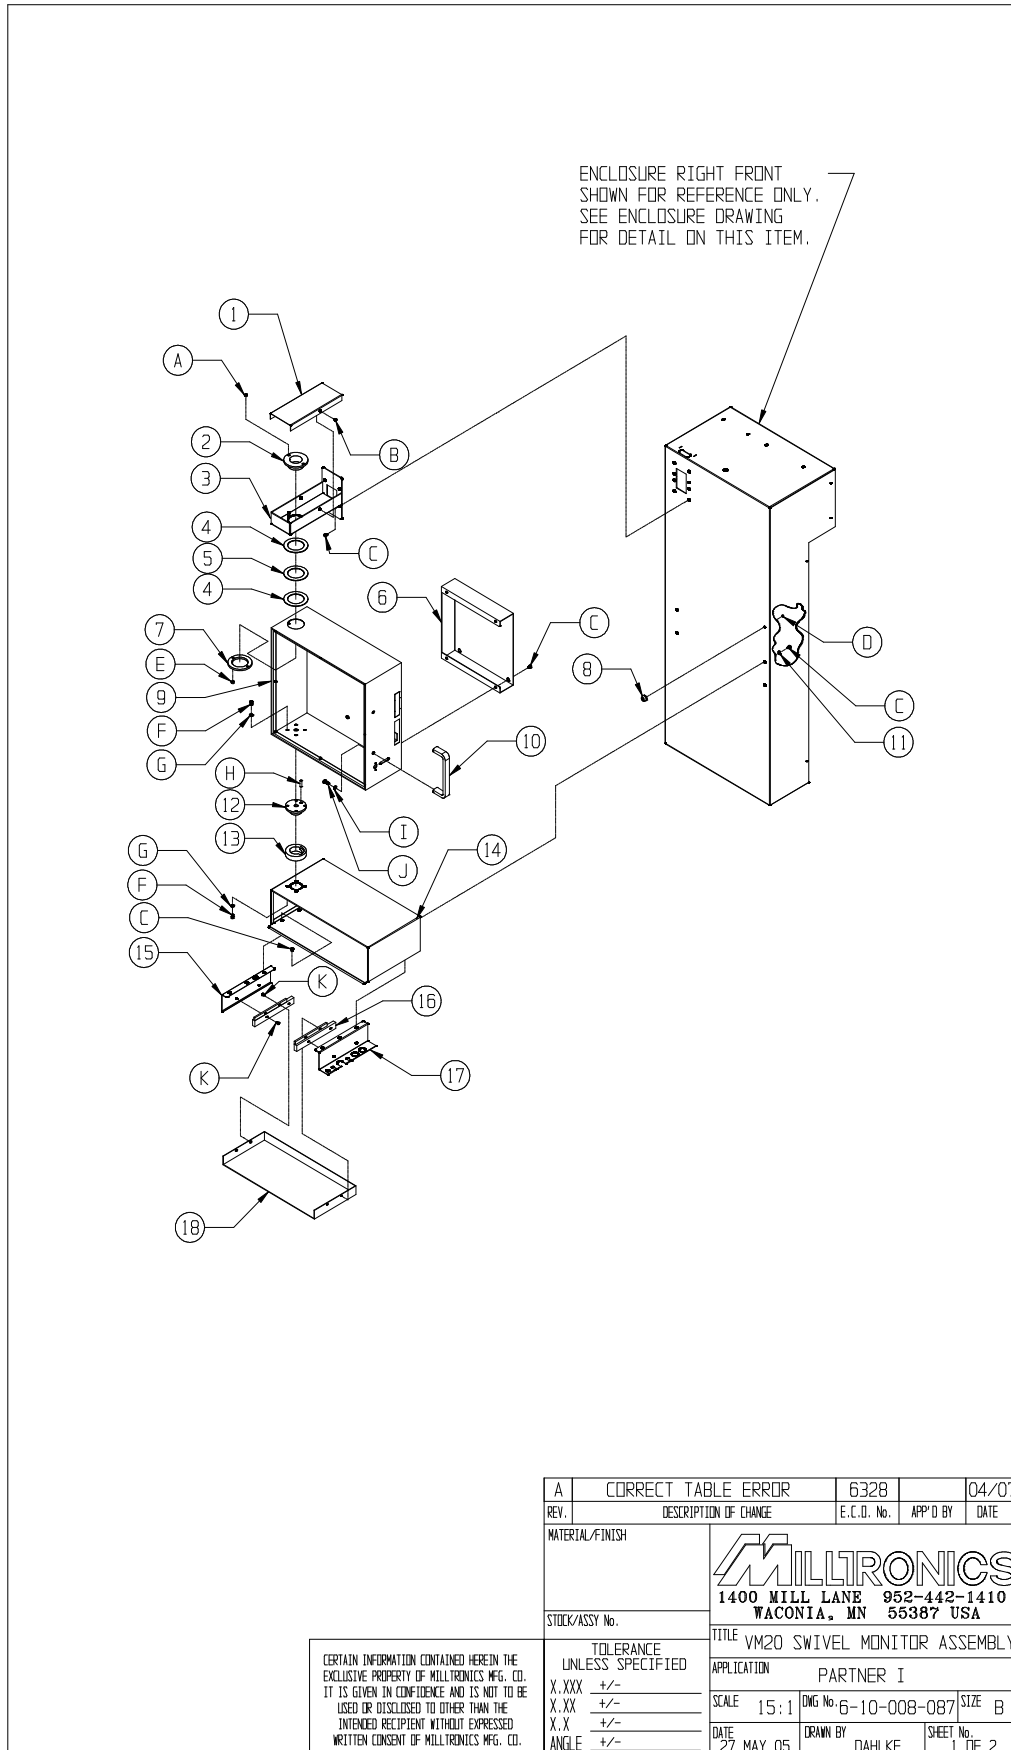

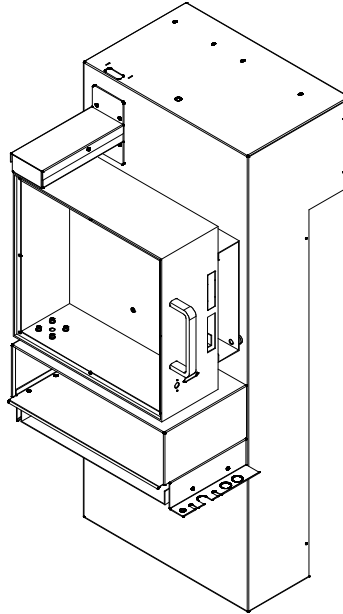

Not Shown		
Qty	Part #	Description
1	MA-495	Cycle light
1	MA-494	LED work light

PARTS LIST			
No.	QTY	STOCK No.	DESCRIPTION
1	1	MP1-494	COVER SWIVEL MONITOR UPPER SUPPORT ARM
2	1	MP-663	FLANGED BUSHING - SWIVEL MONITOR
3	1	MP1-491	UPPER SUPPORT ARM - SWIVEL MONITOR
4	2	WX-295	WASHER - SWIVEL MONITOR
5	1	MP3D-12	WAVE WASHER
6	1	MP-653	3-RING BINDER POCKET - SWIVEL MONITOR
7	1	MP-647	COLLAR - SWIVEL MONITOR
8	1	WX-156	BLACK BUMPER
9	1	#01018838	SWIVEL MONITOR BOX
10	1	WX-230	HANDLE
11	4	HD-12	RUBBERIZED WASHER
12	1	MP-648	SWIVEL PIVOT BUSHING
13	1	MP-649	SWIVEL PIVOT BASE
14	1	MP1-492	SWIVEL MONITOR BASE
15	1	MP1-498	BRACKET - SWIVEL MONITOR DRAWER OPTION
16	1	MP-654	8" FULL EXTENSION ACCURIDE SLIDE
17	1	MP1-497	UTILITY TRAY - SWIVEL MONITOR
18	1	MP-626	TRAY - KEYBOARD PULL-OUT


PARTS LIST		
No.	QTY	DESCRIPTION
A	2	M6-1 NYLOCK NUT
B	2	M5-.8 x 10mm BHCS
C	18	M6-1 x 10mm BHCS
D	1	8-32 NYLOCK NUT
E	2	M5-.8 NYLOCK NUT
F	8	M6-1 x 10mm SHCS
G	8	M6 LOCK WASHER
H	1	1/4 x .5 DOWEL PIN
I	2	M8 FLAT WASHER
J	2	M8-1.25 x 20mm BHCS
K	8	M3-.5 x 10mm BHCS

SWIVEL BOX TABLE	
No.	#01018838
g	

A	CORRECT TABLE ERROR	6328		04/07
REV.	DESCRIPTION OF CHANGE	E.C.O. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED		TITLE VM20 SWIVEL MONITOR ASSEMBLY		
X.XXX +/-		APPLICATION PARTNER I		
X.XX +/-		SCALE 10:1		DWG No 6-10-008-087
X.X +/-		DATE 27 MAY 05		SHEET 2 OF 2
ANGLE +/-		DRAWN BY DAHLKE		


CERTAIN INFORMATION CONTAINED HEREIN THE EXCLUSIVE PROPERTY OF MILLTRONICS MFG. CO. IT IS GIVEN IN CONFIDENCE AND IS NOT TO BE USED OR DISCLOSED TO OTHER THAN THE INTENDED RECIPIENT WITHOUT EXPRESSED WRITTEN CONSENT OF MILLTRONICS MFG. CO.

Control Box Assembly #01018838

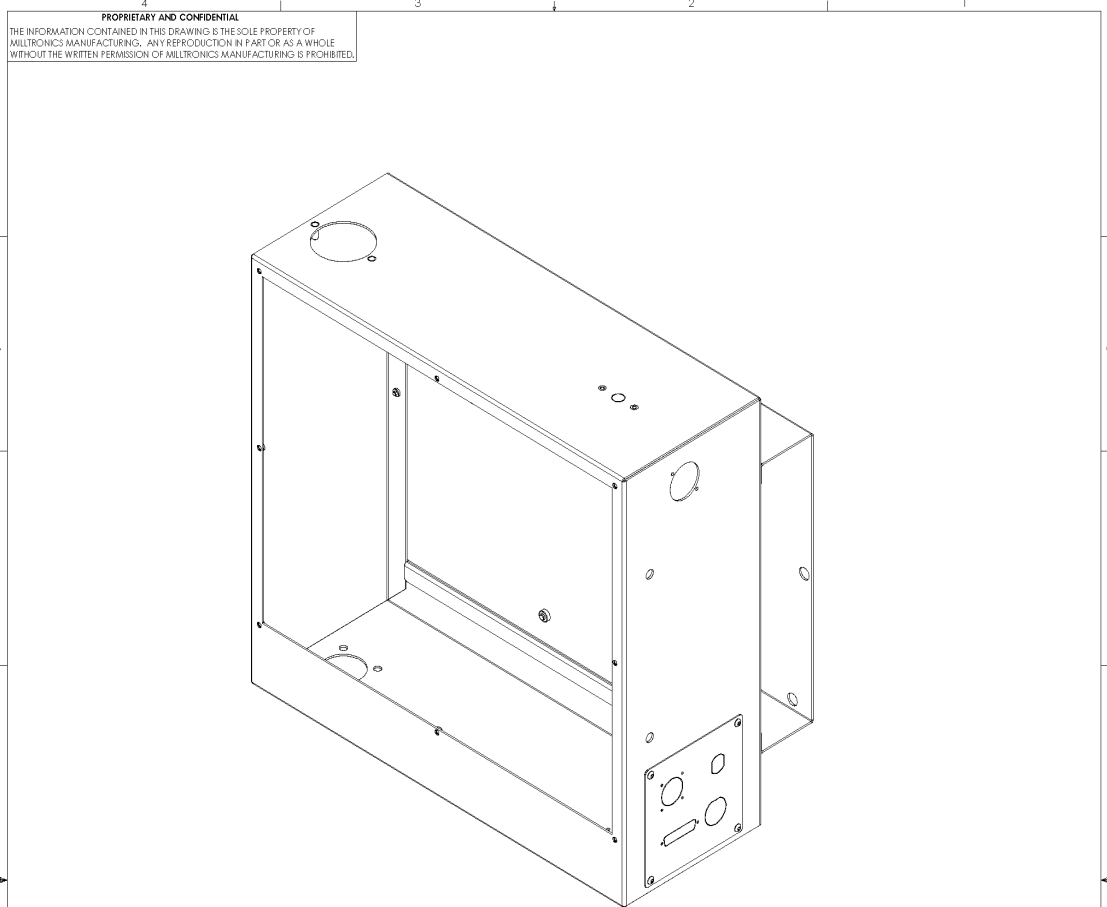


ITEM NO.	QTY.	PART NUMBER	DESCRIPTION
1	1	01018836	CONTROL BOX - ONE PIECE CONSTRUCTION
2	1	01018855	CONTROL BOX ACCESS PANEL WITH USB
3	1	01040054	CONTROL PANEL- BACK COVER
4	1	MP00653	3 RING BINDER POCKET-SWIVEL MONITOR
5	8	BHCS M4-0.7 x 8	M4-0.7 x 8mm BHCS
6	4	BHCS M6-1.0 x 10	M6-1.0 x 10mm BHCS

A	CHANGE KNOCK OUT PLATE ORIENTATION		8087	DH	01/14
REV.	DESCRIPTION		E.C.O. No.	APP'D BY	DATE
		NAME DATE	 MILLTRONICS CNC MACHINES 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA		
	DRAWN DE	25 JUN 12			
	MATERIAL:				
	FINISH:				
	UNLESS OTHERWISE SPECIFIED:		TITLE: CONTROL BOX ASSEMBLY		
	DIMENSIONS ARE IN INCHES(MM)		SCALE: 1:4	DWG. NO. 01018838	
	TOLERANCES:		ESTIMATED WEIGHT: 12.2 Lbs.		
	FRACTIONAL: ± 1/16		STOCK/ASSY NO. 01018838		
	ANGULAR: MACH ± 1.0 BEND ± 0.50 [76]		SHEET NO. 1 OF 2		
	ONE PLACE DECIMAL ± 0.10 [25]		B		
	TWO PLACE DECIMAL ± 0.05 [13]				

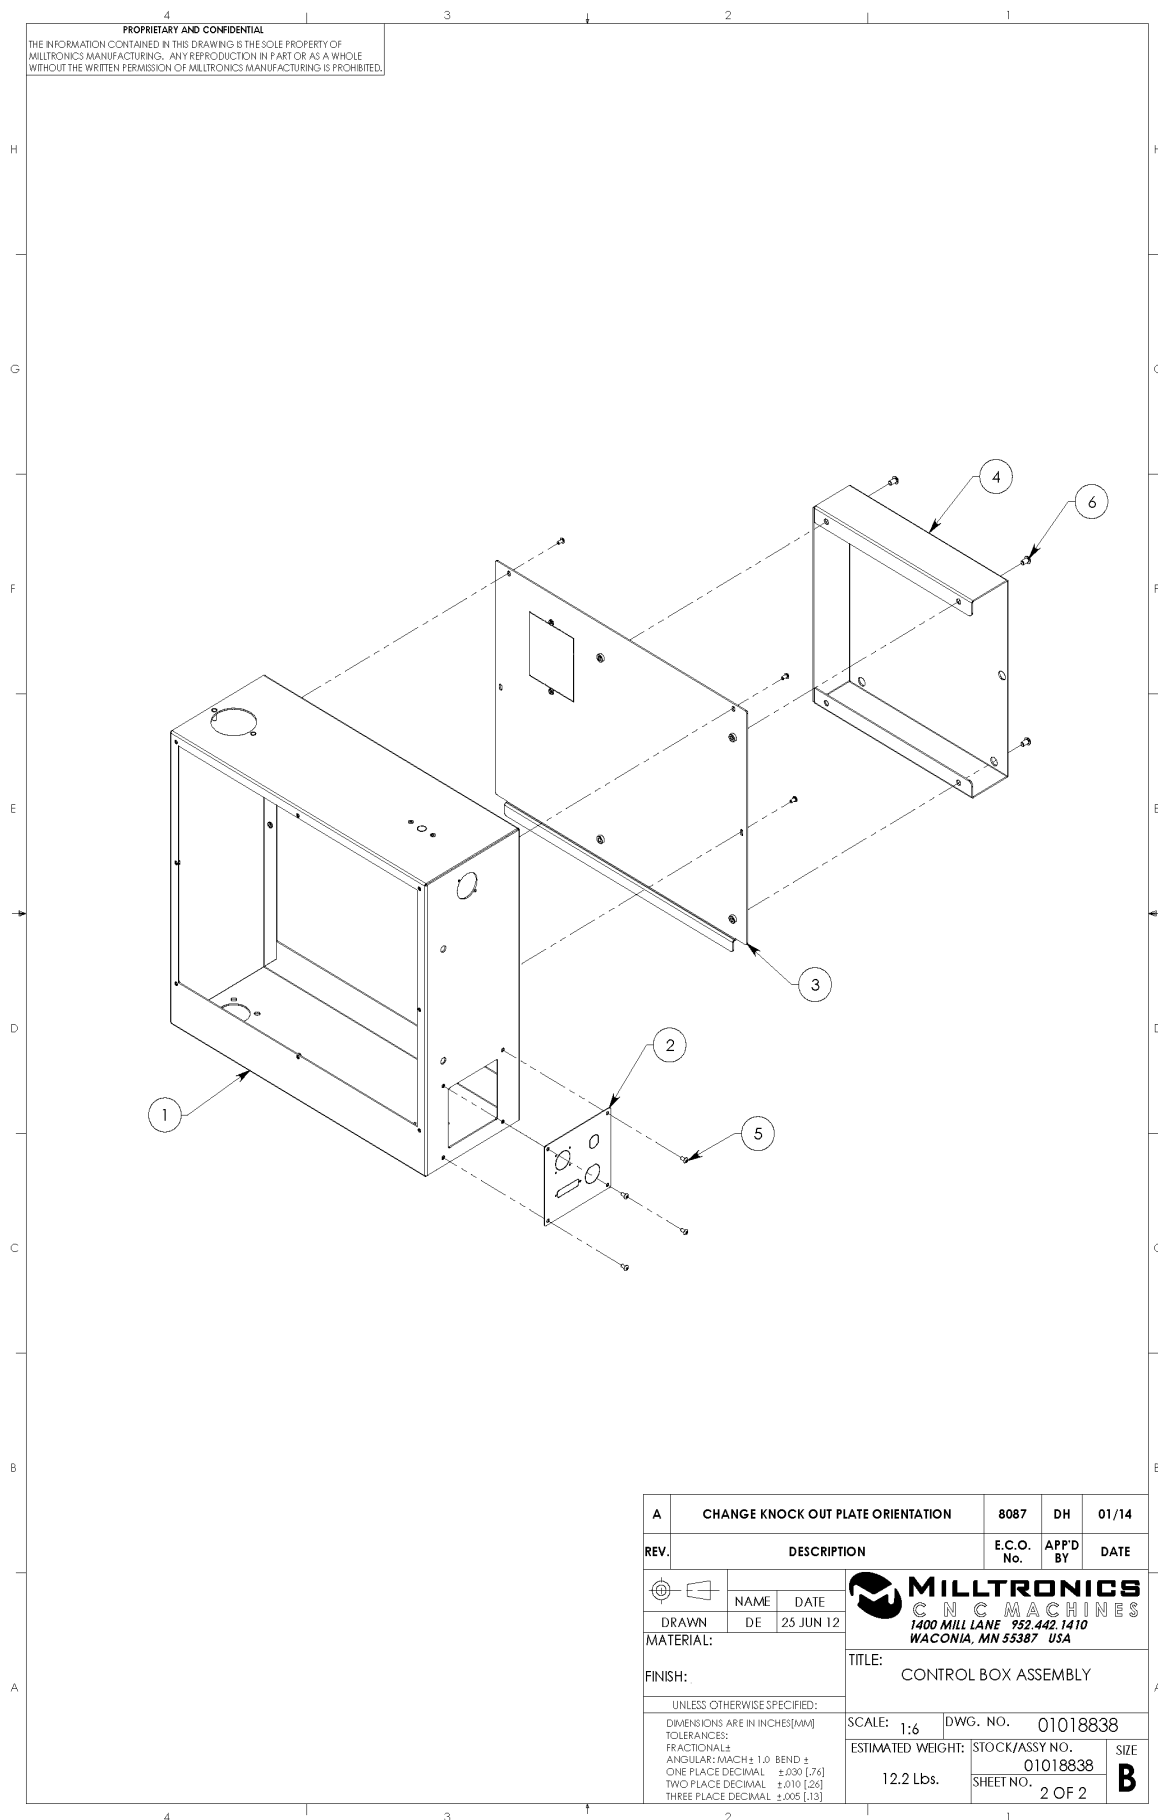


Power Drawbar Cylinder Assembly

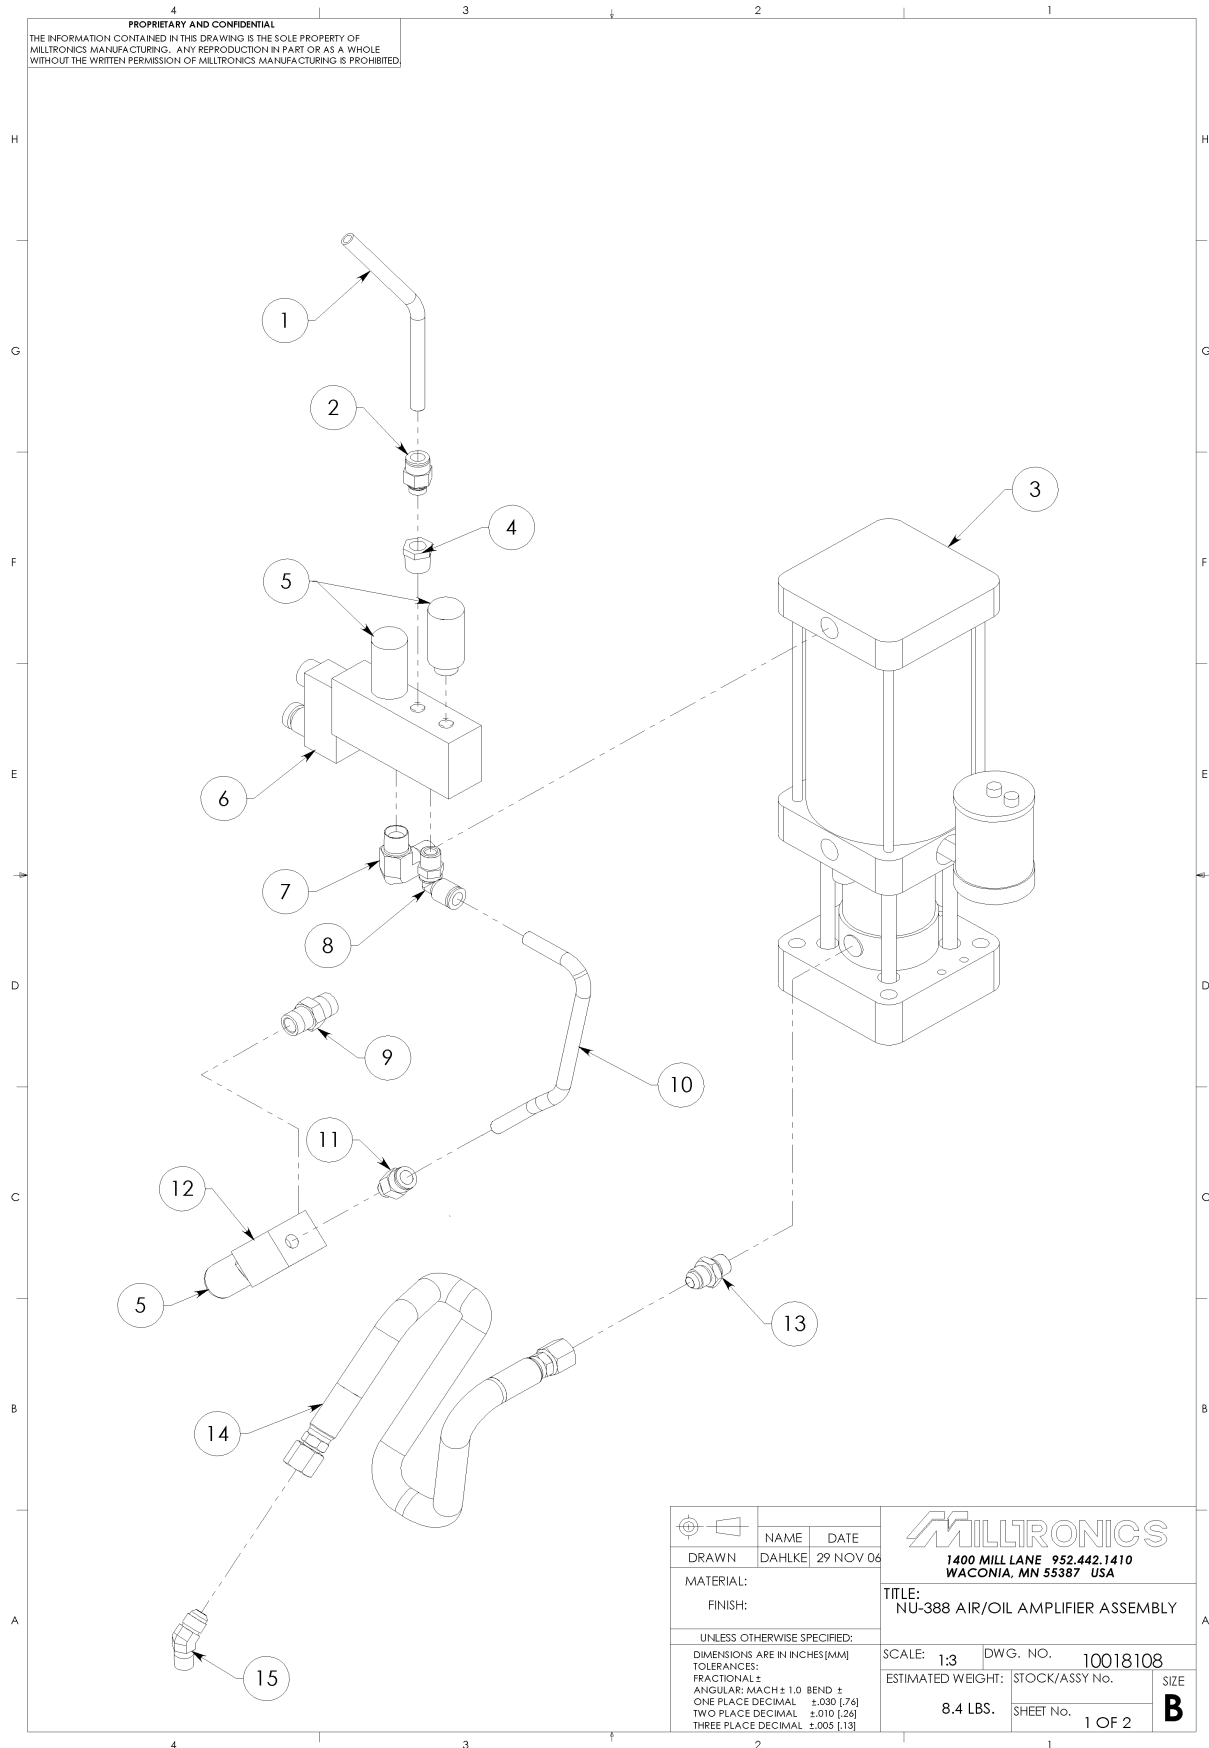

4
3 2 1

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED.

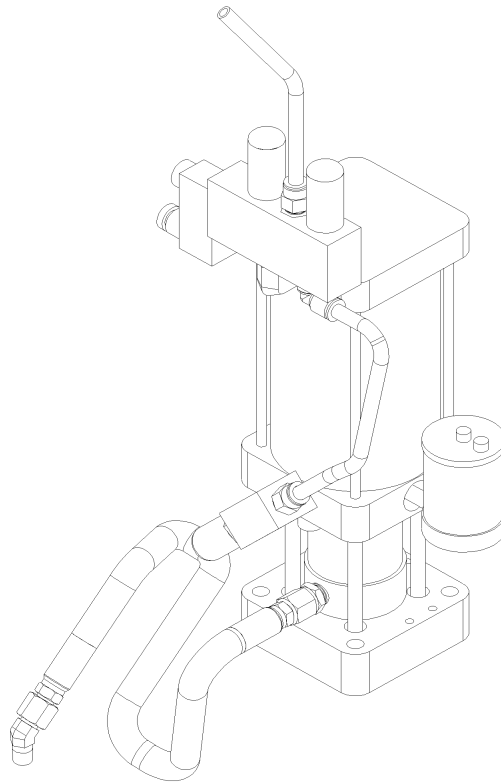


ITEM NO.	QTY	PART NO.	DESCRIPTION
1	1	NU00078	3/8 AIR LINE
2	1	NU00095	TUBE CONNECTOR - M/S 3/8 TUBE 1/4NPT
3	1	NU00408	AIR/OIL AMPLIFIER SYSTEM
4	1	NU00027	REDUCER - 3/8 x 1/4NPT
5	3	NU00375	MUFFLER
6	1	NU00293	SOLENOID VALVE
7	1	NU00292	MALE ELBOW - 3/8NPT
8	1	NU00412	SWIVEL ELBOW - M/S 10mm TUBE 3/8NPT
9	1	NU00235	NIPPLE - 3/8NPT
10	1	NU00306	10mm AIR LINE
11	1	NU00297	TUBE CONNECTOR - M/S 10mm TUBE 3/8NPT
12	1	NU00402	EXHAUST VALVE
13	1	NU00409	FLARE FITTING - 3/8NPT
14	1	NU00403	19" INLINE AMPLIFIER HOSE
15	1	NU00410	ELBOW FLARE FITTING - 1/8NPT x 45°

	NAME	DATE	
	DRAWN	DAHLKE/29 NOV 06	
MATERIAL:		TITLE:	
FINISH:		NU-388 AIR/OIL AMPLIFIER ASSEMBLY	
UNLESS OTHERWISE SPECIFIED:		SCALE: 1:3	DWG. NO. 10018108
DIMENSIONS ARE IN INCHES (MM)		ESTIMATED WEIGHT:	STOCK/ASSY No.
TOLERANCES:		8.4 LBS.	SHEET No. 2 OF 2
FRACTIONAL ±		SIZE B	
ANGULAR: MACH ± 1.0 BEND ±			
ONE PLACE DECIMAL ±.030 [.76]			
TWO PLACE DECIMAL ±.010 [.26]			
THREE PLACE DECIMAL ±.005 [.13]			

Tool Changer Slide/Bracket Assembly


PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED

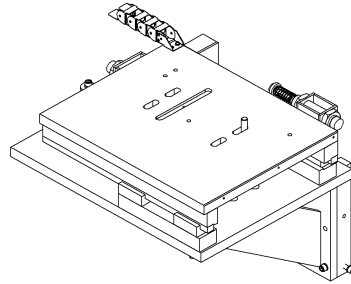


ITEM NO.	QTY	PART NUMBER	DESCRIPTION
1	1	MPH0021	ATC AIR CYLINDER BRACKET
2	1	MPH0023	ATC MOUNT BRACKET
3	2	MPH0019	ATC AIR CYLINDER COLUMN BRACKET
4	1	MPH0111	HM20 CYLINDER BLOCK-ATC
5	1	MPH0109	EXTEND STOP BRACKET
6	1	MPH0110	SHOCK BRACKET
7	1	MPH0107	STOP-SHOCK MOUNT
8	1	MPH0108	RETRACT STOP BRACKET
9	4	MPH0028	ATC MOUNT RAIL BLOCK
10	2	MPH0027	ATC MOUNT RAIL
11	1	NU00422	CYLINDER ASSEMBLY
12	2	NU00423	FLOW CONTROL VALVE
13	2	HD00100	SHOCK STOP & NUT
14	2	HD00098	CUSHION SHOCK & NUTS
15	1	MP60220	CABLE TRACK ASSEMBLY
16	20	RAIL PLUG 11mm	11mm RAIL PLUG
17	20	SHCS M6-1.0 x 25	M6-1.0 x 25mm SHCS
18	16	SHCS M6-1.0 x 90	M6-1.0 x 90mm SHCS
19	8	SHCS M10-1.5 x 35	10-1.5 x 35mm SHCS
20	4	SHCS M10-1.5 x 40	M10-1.5 x 40mm SHCS
21	12	SHCS M12-1.75 x 50	M12-1.75 x 50mm SHCS
22	1	SHCS M12-1.75 x 100	M12-1.75 x 100mm SHCS
23	4	SHCS M16-2.0 x 55	M16-2.0 x 55mm SHCS
24	4	BHCS M6-1.0 x 16	M6 - 1.0 x 16mm BHCS
25	20	WASHER LOCK M6	M6 LOCK WASHER
26	12	WASHER LOCK M10	M10 LOCK WASHER
27	12	WASHER LOCK M12	M12 LOCK WASHER
28	4	WASHER LOCK M16	M16 LOCK WASHER
29	4	WASHER FLAT M6	M6 FLAT WASHER
30	4	WASHER FLAT M10	M10 FLAT WASHER
31	4	WASHER FLAT M16	M16 FLAT WASHER
32	2	HEX NUT M20-1.5	M20-1.5 HEX NUT

Not shown, NU00382, 4-Way Air Valve

B	CHANGE M12 BOLTS TO M10	6782		04/09
A	MULTIPLE CHANGES	6545	N.M.	05/08
REV.	DESCRIPTION	E.C.O. No.	APP'D BY	DATE
				
DRAWN	NAME	DATE	1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA	
MATERIAL:	FINISH: PAINT MMC LIGHT GRAY	TITLE: ATC BRACKET ASSEMBLY		
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		SCALE: 1:12	DWG. NO. 10038002	SIZE B
ESTIMATED WEIGHT: 670.8 LBS.		STOCK/ASSY No.		SHEET No. 1 OF 2

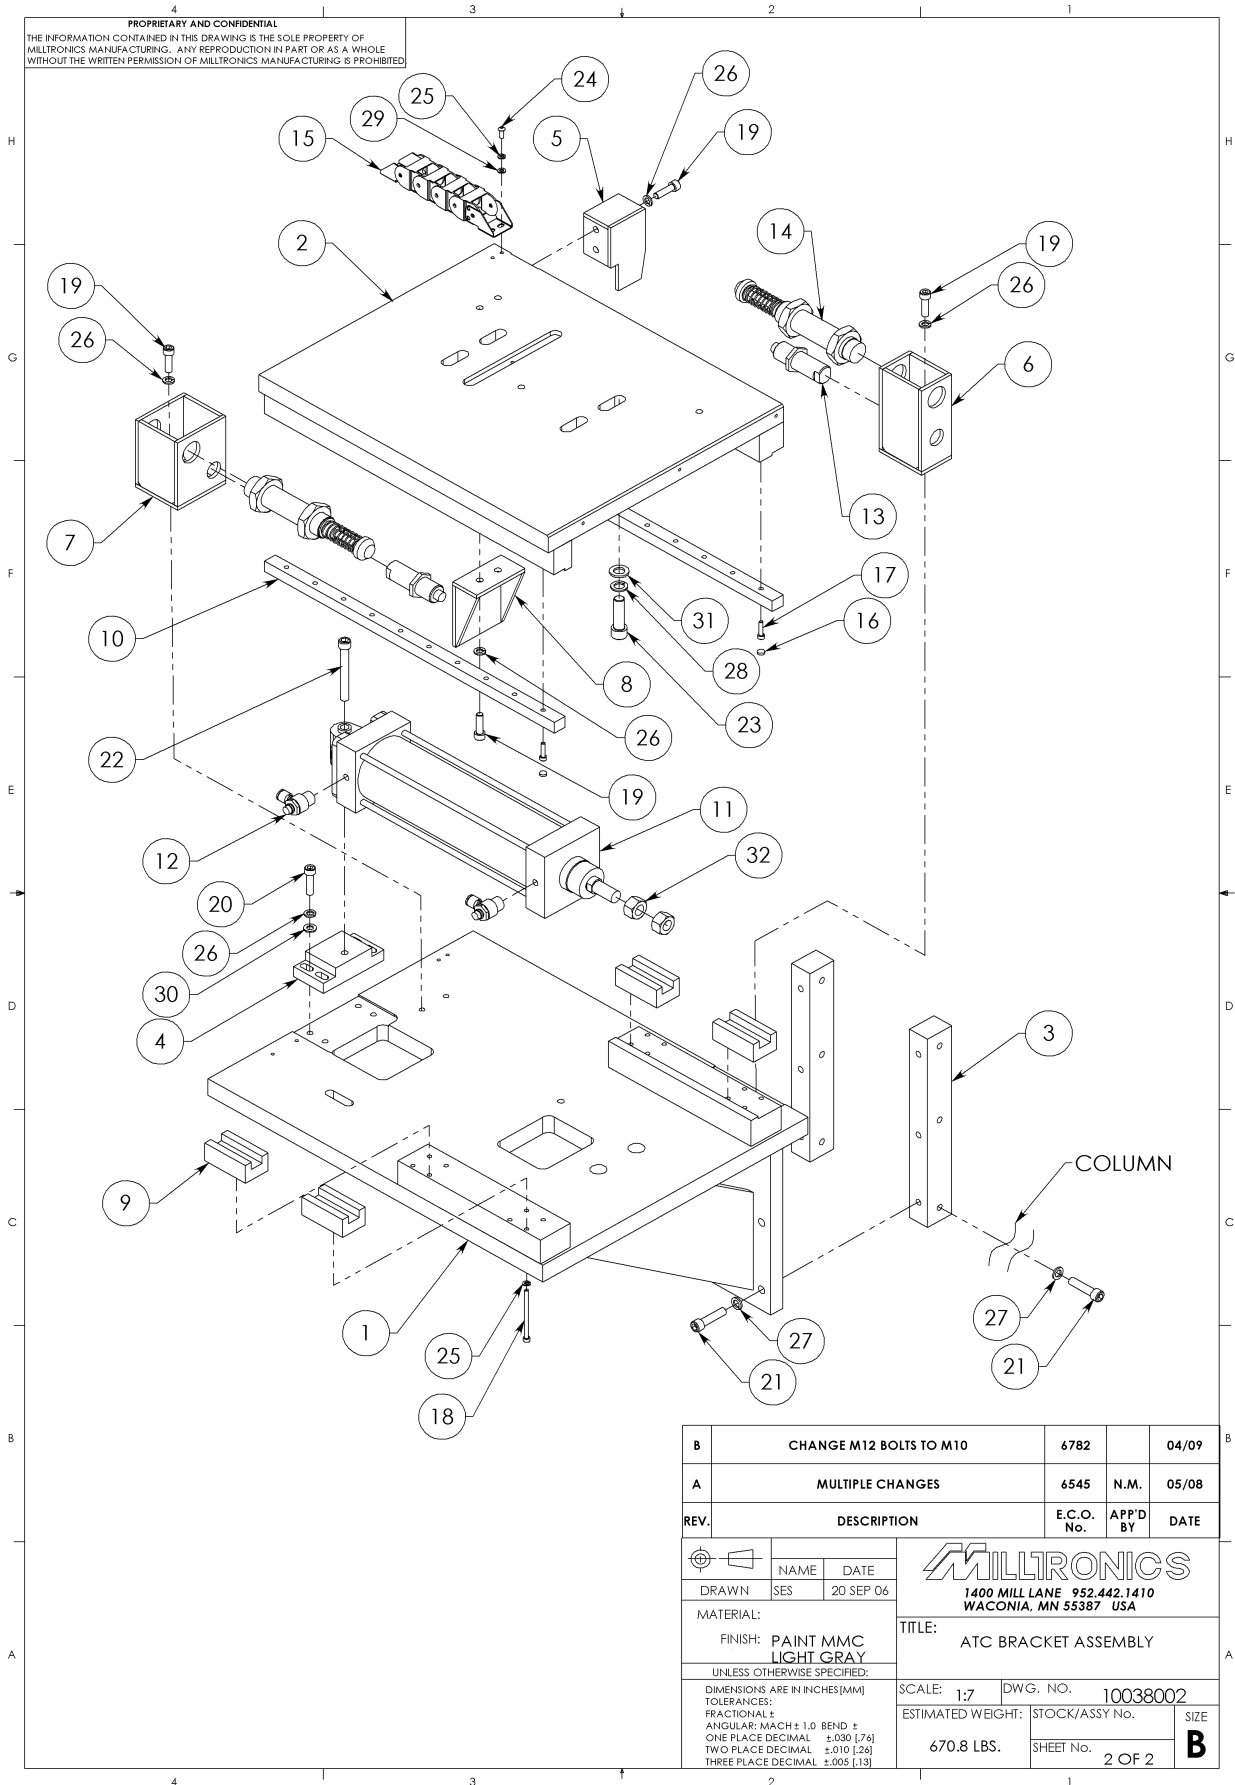

Tool Changer Door Assembly

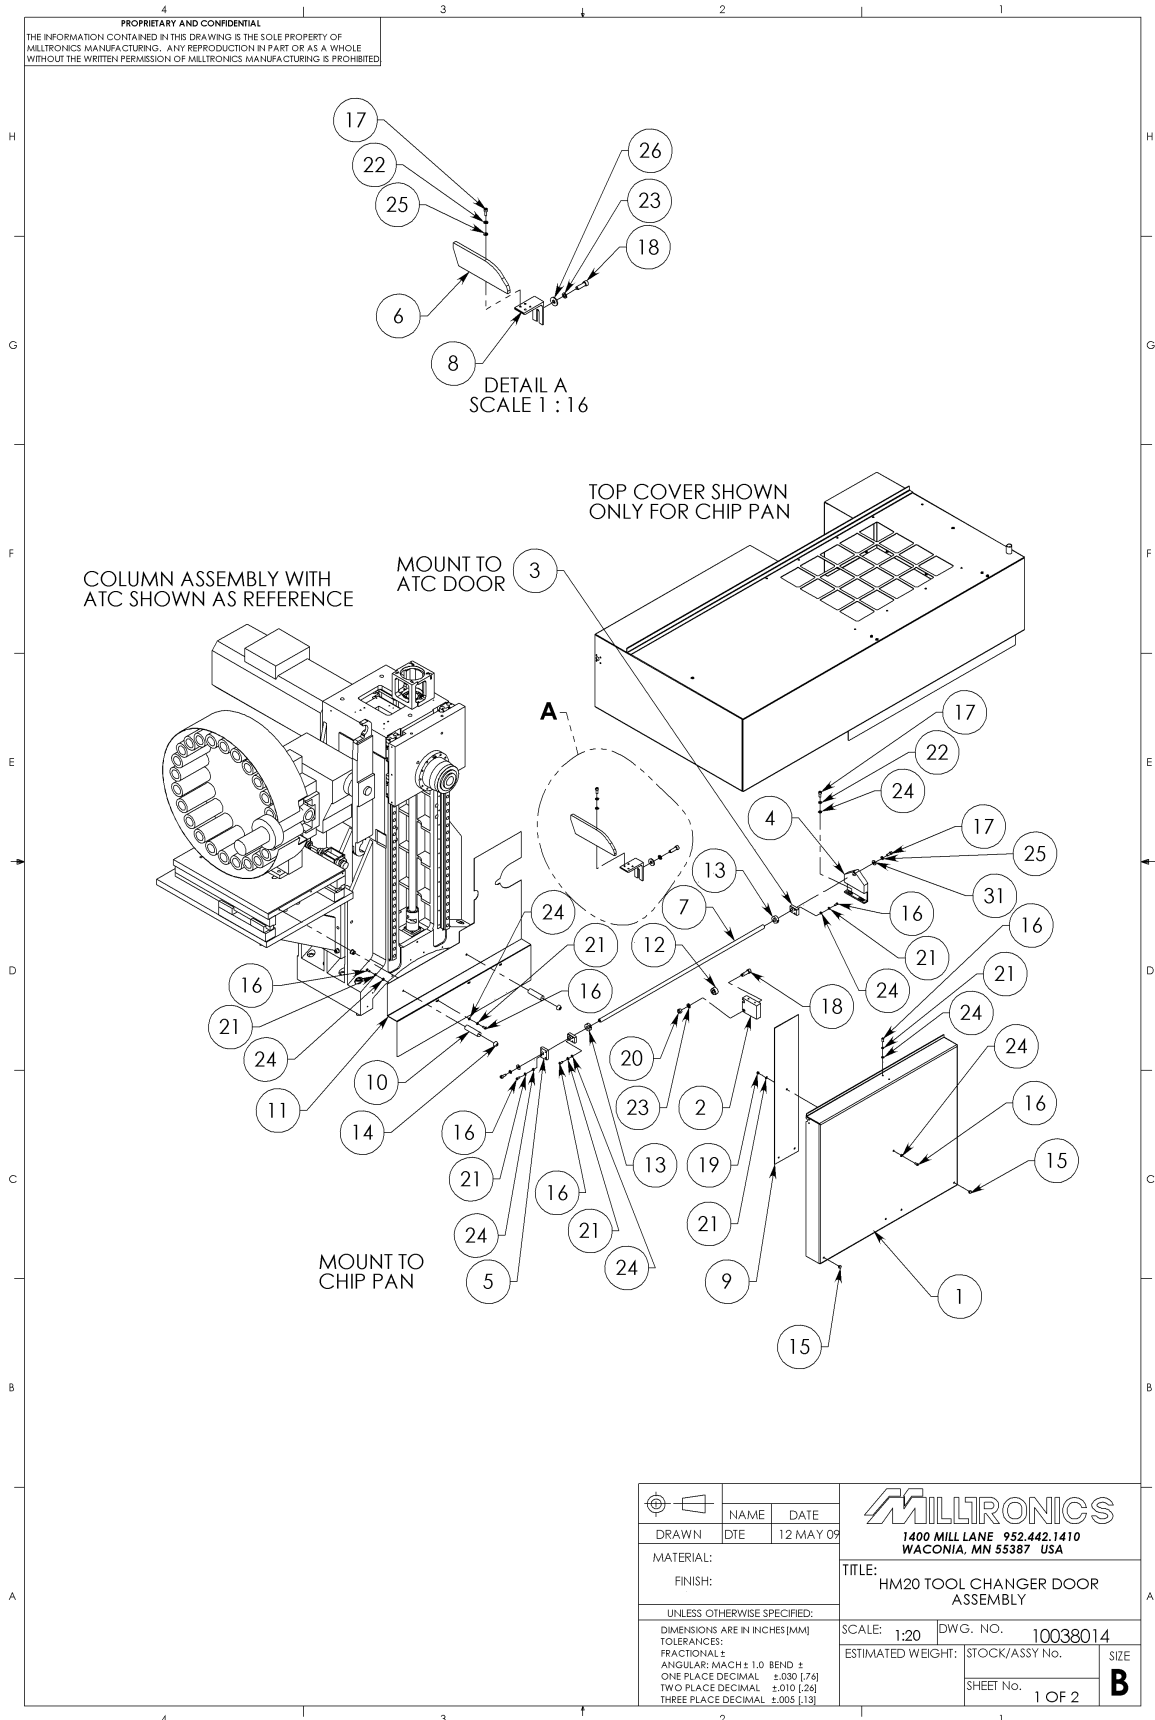


ITEM NO.	QTY	PART NUMBER	DESCRIPTION
1	1	MPH0099	HM20 ATC DOOR
2	1	MPH0100	ATC DOOR-CENTER FOLLOWER BRACKET
3	2	MPH0101	ATC DOOR-CORNER BUSHING
4	1	MPH0102	ATC DOOR-COLUMN BRACKET
5	1	MPH0103	ATC DOOR-END BUSHING
6	1	MPH0104	ATC DOOR - DOOR GUIDE PLATE TOP
7	1	MPH0105	HM20 ATC DOOR-PIVOT SHAFT
8	1	MPH0115	ATC DOOR GUIDE PLATE BOTTOM
9	1	MPH0116	DOOR BACKER PLATE
10	2	MPH0117	ATC DOOR BUMPER SPACER
11	1	MPH0039	ATC MAIN SHIELD
12	1	BG00193	5201ZZ, BEARING
13	2	MPH0132	2 PIECE SPLIT COLLAR
14	2	WX00156	BUMPER
15	2	WX00310	BUMPER FRONT DOOR ENCLOSURE
16	18	BHCS M6-1.0 x 16	M6 - 1.0 x 16mm BHCS
17	8	SHCS M8-1.25 x 20	M8-1.25 x 20 SHCS
18	3	SHCS M12-1.75 x 40	M12-1.75 x 40 SHCS
19	3	NUT HEX NYLOCK M6-1.0	M6-1.0 NYLOCK HEX NUT
20	1	NUT HEX M12-1.75	M6 LOCK WASHER
21	18	WASHER LOCK M6	M6 LOCK WASHER
22	6	WASHER LOCK M8	M8 LOCK WASHER
23	3	WASHER LOCK M12	M12 LOCK WASHER
24	18	WASHER FLAT M6	M6 FLAT WASHER
25	6	WASHER FLAT M8	M8 FLAT WASHER
26	2	WASHER FLAT M12	M12 FLAT WASHER
31	2	WASHER FLAT .312	5/16 FLAT WASHER

 DRAWN: DTE DATE: 12 MAY 09 MATERIAL: FINISH: UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0° BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.25] THREE PLACE DECIMAL ±.005 [.13]	NAME: _____ DATE: _____ TITLE: HM20 TOOL CHANGER DOOR ASSEMBLY	
	SCALE: 1:48 DWG. NO. 10038014 ESTIMATED WEIGHT: 2899.5 LBS. STOCK/ASSY NO. _____ SHEET No. 2 OF 2	



 1400 MILL LANE 952.442.1410
 WACONIA, MN 55387 USA
B

X & Y Axis Autolube Manifold Assembly

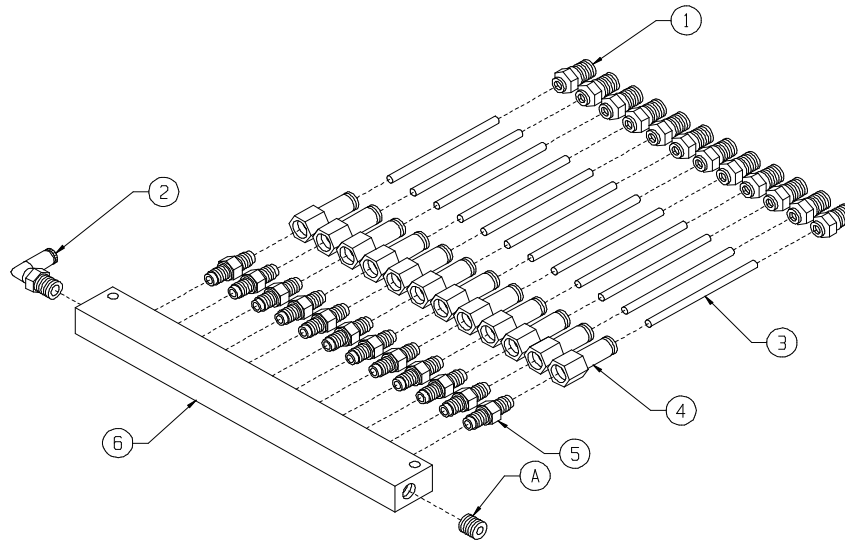

NOTES:

1. X MIDDLE RAILBLOCK PORTS, FRONT AND REAR ARE PLUGGED IF NOT USED.

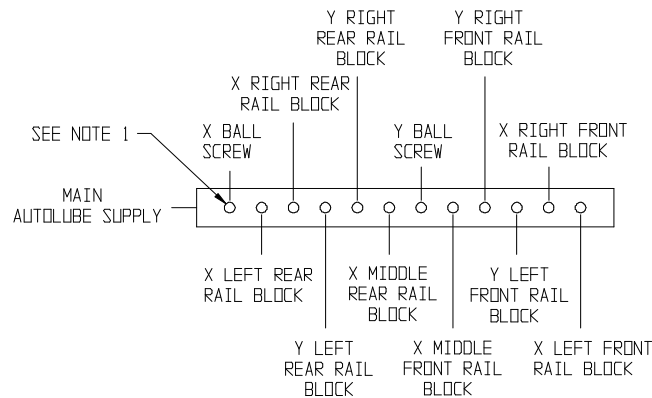

AUTOLUBE LINE DESTINATIONS

B	UPDATE OIL METER FITTINGS	6760		03/09
A	ADD FRAMES TO CHART	5996	N.M.	08/05
REV.	DESCRIPTION	E.C.D. NO.	APP'D BY	DATE

MATERIAL/FINISH

STOCK/ASSY No.

MILLTRONICS
1400 MILL LANE 952.442.1410
WACONIA, MN 55387 USA

TITLE X & Y AXIS

APPLICATION AUTOLUBE MANIFOLD ASSEMBLY


SCALE 2:1 DWG No. 6-10-018-049 SIZE B

DATE 25 JUL 97 DRAWN BY THOMPSON SHEET NO. 1 OF 2

CERTAIN INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF MILLTRONICS MFG. CO. IT IS GIVEN IN CONFIDENCE AND IS NOT TO BE USED OR DISCLOSED TO OTHER THAN THE INTENDED RECIPIENT WITHOUT EXPRESSED WRITTEN CONSENT OF MILLTRONICS MFG. CO.

TOLERANCE
UNLESS SPECIFIED
X .XXX ±
X .XX ±
X .X ±
ANGLE ±

THIS ASSEMBLY IS USED ON
 VM15, VM16, VM20, VM25 & VM30

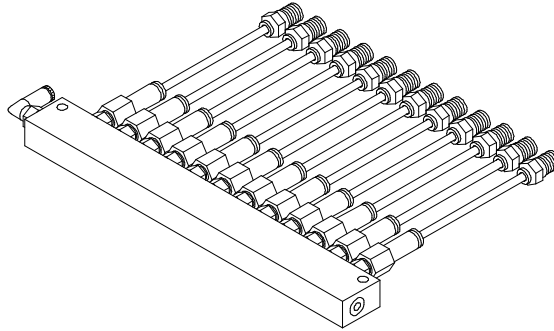

PARTS LIST

No.	QUANTITY	STOCK No.	DESCRIPTION
1	12	NU-154	5/32 TUBE 1/8 NPT M/S
2	1	NU-161	1/8 NPT-.156 SWIVEL FITTING
3	SEE TABLE	NU-117	5/32 NYLON TUBING
4	12	NU-157	5/32 TUBE-1/8 NPT FEM.
5	-	SEE TABLE	OIL METER
6	1	MP-356	X & Y AIR/OIL LUBE MANIFOLD

NU-117 TUBING LENGTH

CONNECTION	VM15-16	VM20	VM22	VM25/30(50)	OIL METER
X LEFT REAR RAIL BLOCK	20	20	24	24	#3 (NU-156)
X RIGHT REAR RAIL BLOCK	27	27	44	44	#3 (NU-156)
Y LEFT REAR RAIL BLOCK	12	12	24	24	#3 (NU-156)
Y RIGHT REAR RAIL BLOCK	24	30	44	44	#3 (NU-156)
X MIDDLE REAR RAIL BLOCK	-	-	38	38	#3 (NU-156)
Y BALL SCREW	26	32	39	39	#2 (NU-155)
X MIDDLE FRONT RAIL BLOCK	-	-	38	38	#3 (NU-156)
Y RIGHT FRONT RAIL BLOCK	24	30	44	44	#3 (NU-156)
Y LEFT FRONT RAIL BLOCK	12	12	24	24	#3 (NU-156)
X RIGHT FRONT RAIL BLOCK	27	27	44	44	#3 (NU-156)
X LEFT FRONT RAIL BLOCK	20	20	24	24	#3 (NU-156)
X BALL SCREW	40	40	60	60	#2 (NU-155)

ALL MEASUREMENTS ARE IN INCHES



HARDWARE LIST

No.	QTY	DESCRIPTION
A	1	1/8-27 NPT SHPP

B	UPDATE OIL METER FITTINGS	6760		03/09
A	ADD FRAMES TO CHART	5996	N.M.	08/05
REV.	DESCRIPTION	E.C.D. NO.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED		TITLE X & Y AXIS AUTOLUBE MANIFOLD ASSEMBLY		
X .XXX ±		APPLICATION GENERAL PRODUCTS		
X .XX ±		SCALE 2:1 DWG No 6-10-018-049 SIZE B		
X .X ±		DATE 25 JUL 97 DRAWN BY THOMPSON SHEET NO. 2 OF 2		
ANGLE ±				

CERTAIN INFORMATION CONTAINED HEREIN IS THE EXCLUSIVE PROPERTY OF MILLTRONICS MFG. CO. IT IS GIVEN IN CONFIDENCE AND IS NOT TO BE USED OR DISCLOSED TO OTHER THAN THE INTENDED RECIPIENT WITHOUT EXPRESSED WRITTEN CONSENT OF MILLTRONICS MFG. CO.

X & Y Axis Air/Oil Manifold Assembly

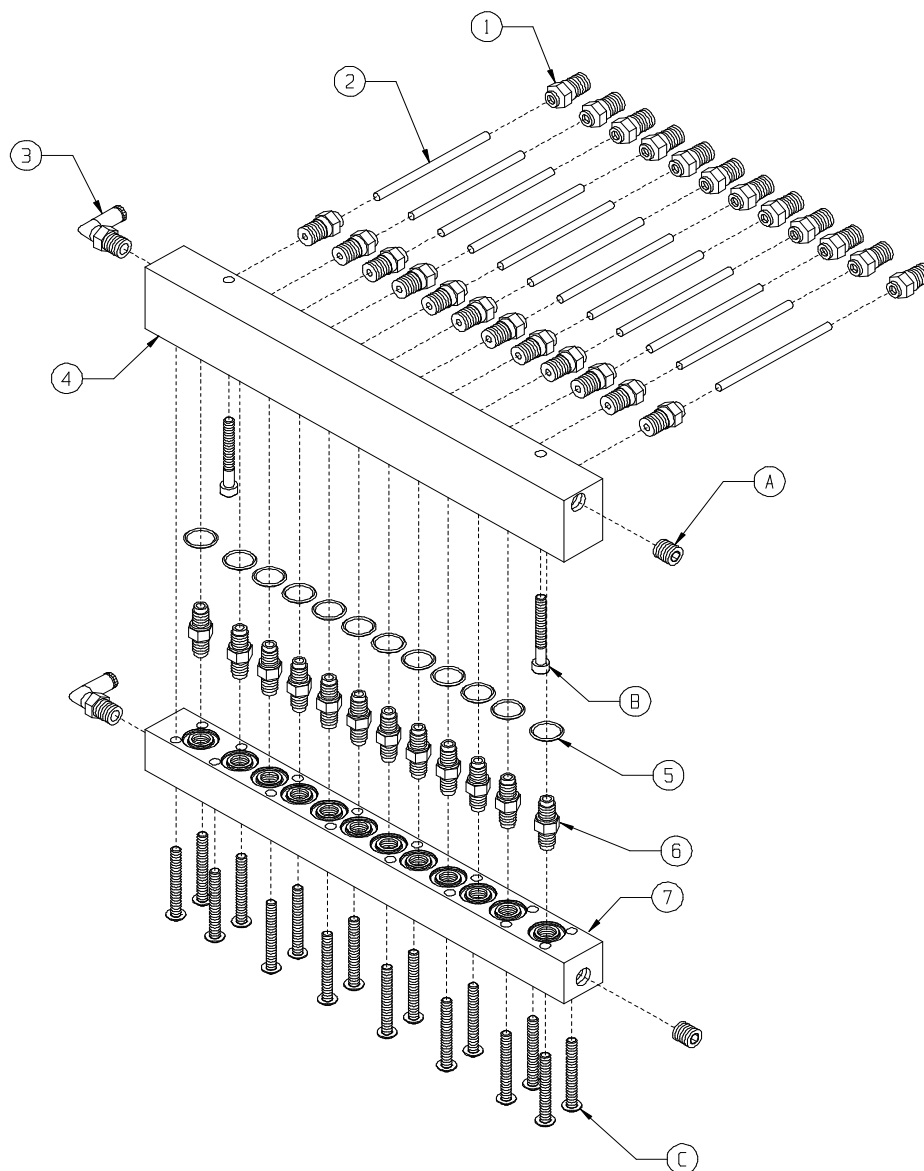


AIR/OIL LINE DESTINATIONS

No.	RAIL BLOCK/BALL SCREW
1	X BALL SCREW
2	X LEFT REAR RAIL BLOCK
3	X RIGHT REAR RAIL BLOCK
4	Y LEFT REAR RAIL BLOCK
5	Y RIGHT REAR RAIL BLOCK
6	X MIDDLE REAR RAIL BLOCK
7	Y BALL SCREW
8	X MIDDLE FRONT RAIL BLOCK
9	Y RIGHT FRONT RAIL BLOCK
10	Y LEFT FRONT RAIL BLOCK
11	X RIGHT FRONT RAIL BLOCK
12	X LEFT FRONT RAIL BLOCK

E	CHANGE TABLE	6060		01/06
D	ADD FRAMES	5995	N.M.	08/05
C	CHANGED METERS	4988	D.H.	2/01
B	ADD VMG17 TO NOTE	4729	N.M.	10/00
A	ADD VMG24 TO NOTE	4327	N.M.	12/99
REV.	DESCRIPTION OF CHANGE	E.C.D. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED				
X.XXX	+/- .005			
X.XX	+/- .010	TITLE X & Y AXIS AIR/OIL MANIFOLD ASSEMBLY APPLICATION PARTNER I SCALE 2:1 DWG No 6-10-008-058 SIZE B DATE 10 JUN 99 DRAWN BY HERME SHEET No 1 OF 2		
X.X	+/- .030			
ANGLE	+/- 1.0°			

THIS ASSEMBLY IS USED ON VM15, VM16, VM17, VM20, VM22, VM25/30(50)

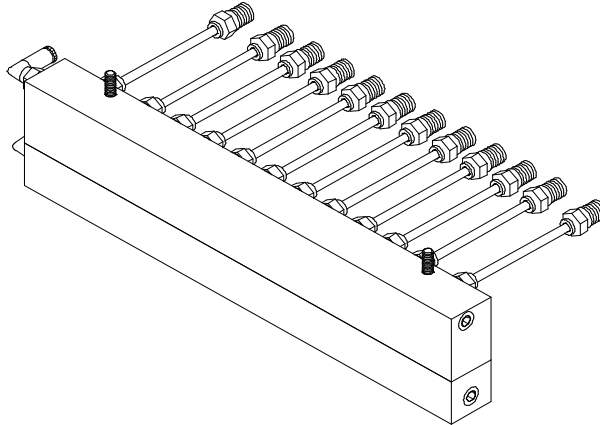

PARTS LIST

No.	QUANTITY	STOCK No.	DESCRIPTION
1	32	NU-154	5/32 TUBE 1/8 NPT M/S
2	SEE TABLE	NU-117	5/32 NYLON TUBING
3	2	NU-161	ELBOW - SWIVEL 5/32 TUBE 1/8 NPT
4	1	MP6-183	X & Y AIR/OIL MANIFOLD - AIR
5	16	WX-248	O-RING BUNA 1/2 ID x 5/8 OD
6	-	SEE TABLE	OIL METER
7	1	MP-661	16 PORT 1/8 NPT MANIFOLD - OIL

NU-117 TUBING LENGTH

	VM15/16	VM20	VM22	VM25/30(50)	OIL METER
X LEFT REAR RAIL BLOCK	20	20	24	24	#3 (NU-156)
X RIGHT REAR RAIL BLOCK	27	27	44	44	#3 (NU-156)
Y LEFT REAR RAIL BLOCK	13	12	24	24	#3 (NU-156)
Y RIGHT REAR RAIL BLOCK	33	30	44	44	#3 (NU-156)
X MIDDLE REAR RAIL BLOCK	-	-	38	38	#3 (NU-156)
Y BALL SCREW	26	32	39	39	#2 (NU-155)
X MIDDLE FRONT RAIL BLOCK	-	-	38	38	#3 (NU-156)
Y RIGHT FRONT RAIL BLOCK	30	30	44	44	#3 (NU-156)
Y LEFT FRONT RAIL BLOCK	12	12	24	24	#3 (NU-156)
X RIGHT FRONT RAIL BLOCK	27	27	44	44	#3 (NU-156)
X LEFT FRONT RAIL BLOCK	20	20	24	24	#3 (NU-156)
X BALL SCREW	40	40	60	60	#2 (NU-155)

ALL MEASUREMENTS ARE IN INCHES

NOTES:-


1. IF REFERENCED WITH A (-) PLUG
 AIR/OIL LINE HOLE AND OIL METER
 HOLE IN MANIFOLD WITH 1/8 NPT PLUG.

HARDWARE LIST

No.	QTY	DESCRIPTION
A	2	1/8-27 NPT SHPP
B	2	10-32 x 1 1/2 SHCS
C	20	10-32 x 1 1/4 BHCS


E	CHANGE TABLE	6060		01/06
D	ADD FRAMES	5995	N.M.	08/05
C	CHANGED METERS	4988	D.H.	02/01
B	ADD VMG17 TO NOTE	4729	N.M.	10/00
A	ADD VMG24 TO NOTE	4327	N.M.	12/99
REV.	DESCRIPTION OF CHANGE	E.C.O. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED		TITLE X & Y AXIS AIR/OIL MANIFOLD ASSEMBLY		
X .XXX +/- .005		APPLICATION PARTNER I		
X .XX +/- .010		SCALE 2:1		
X .X +/- .030		DWG No. 6-10-008-058		
ANGLE +/- 1.0°		SIZE B		
DATE 10 JUN 99		DRAWN BY HERME		SHEET No. 2 OF 2

Z-Axis Air/Oil Manifold Assembly

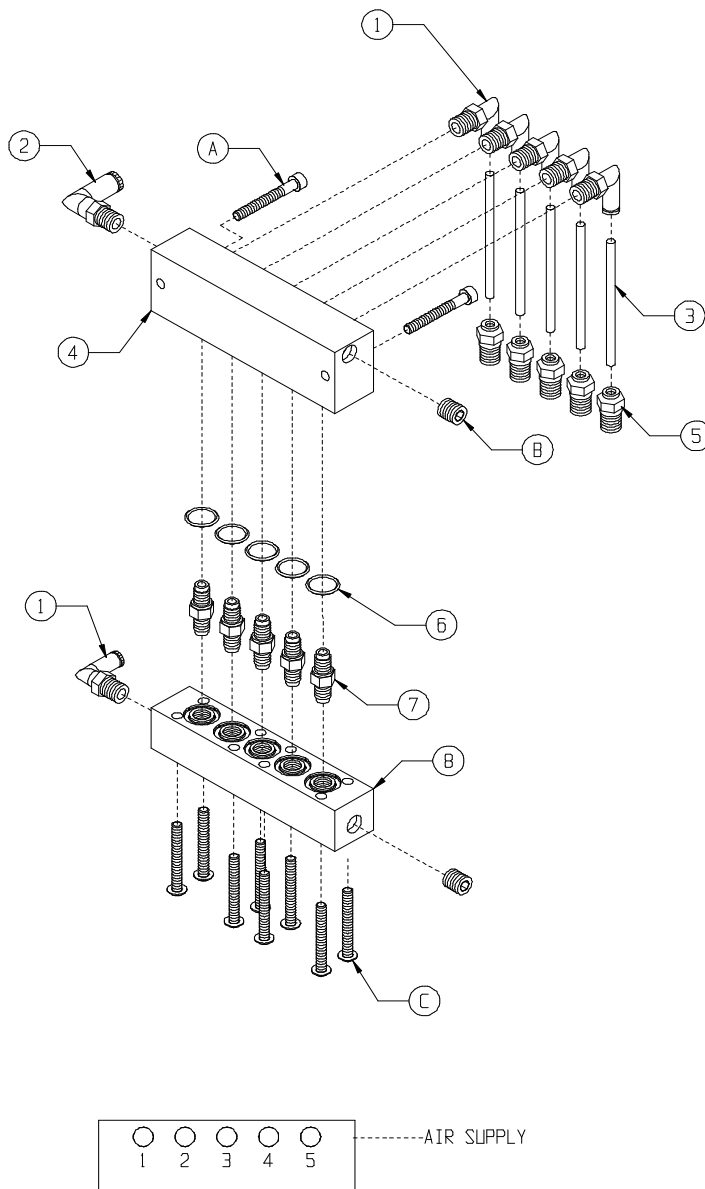

AIR/OIL LINE DESTINATIONS	
No.	RAIL BLOCK/BALL SCREW
1	Z RIGHT UPPER RAIL BLOCK
2	Z RIGHT LOWER RAIL BLOCK
3	Z BALL SCREW
4	Z LEFT LOWER RAIL BLOCK
5	Z LEFT UPPER RAIL BLOCK

D	CHANGE TO ALL FRAMES	6002		11/05
C	REMOVED VMG24	4987	N.M.	2/01
B	ADD VMG24 NOTE	4338	N.M.	1/00
A	UPDATED TUBE LENGTHS	4077	N.M.	7/99
REV.	DESCRIPTION OF CHANGE	E.C.O. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED		TITLE Z AXIS AIR/OIL MANIFOLD ASSEMBLY		
		APPLICATION PARTNER I		
X.XXX	+/- .005	SCALE 2:1		DWG No. 6-10-008-059
X.XX	+/- .010			SIZE B
X.X	+/- .030			
ANGLE	+/- 1.0°	DATE 1 JUN 99		DRAWN BY HERME
				SHEET 1 OF 2



PARTS LIST

No.	QUANTITY	STOCK No.	DESCRIPTION
1	6	NU-161	ELBOW-SWIVEL 5/32 TUBE 1/8 NPT
2	1	NU-171	ELBOW - SWIVEL 1/4 TUBE 1/8 NPT
3	SEE TABLE	NU-117	5/32 NYLON TUBING
4	1	MP1-301	Z AIR/OIL MANIFOLD - AIR
5	5	NU-154	5/32 TUBE 1/8 NPT M/S
6	5	WX-248	O-RING Buna 1/2 ID x 5/8 OD
7	-	SEE TABLE	OIL METER
8	1	MP-660	Z AIR/OIL MANIFOLD - OIL

NU-117 TUBING LENGTH

CONNECTION	ALL FRAMES	OIL METER
Z LEFT UPPER RAIL BLOCK	37	#3 (NU-156)
Z LEFT LOWER RAIL BLOCK	31	#3 (NU-156)
Z RIGHT UPPER RAIL BLOCK	29	#3 (NU-156)
Z RIGHT LOWER RAIL BLOCK	23	#3 (NU-156)
Z BALL SCREW	26	#2 (NU-155)

ALL MEASUREMENTS ARE IN INCHES

HARDWARE LIST


No.	QTY	DESCRIPTION
A	2	10-32 x 1 1/2 SHCS
B	2	1/8-27 NPT SHPP
C	8	10-32 x 1 1/2 BHCS

D	CHANGE TO ALL FRAMES	6002		11/05
C	REMOVED VMG24	4987	N.M.	2/01
B	ADD VMG24 NOTE	4338	N.M.	1/00
A	UPDATED TUBE LENGTHS	4077	N.M.	7/99
REV.	DESCRIPTION OF CHANGE	E.C.D. No.	APP'D BY	DATE
MATERIAL/FINISH		 1400 MILL LANE 952-442-1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.				
TOLERANCE UNLESS SPECIFIED		TITLE Z AXIS AIR/OIL MANIFOLD ASSEMBLY		
X.XXX +/- .005		APPLICATION PARTNER I		
X.XX +/- .010		SCALE 2:1 DWG No. 6-10-008-059 SIZE B		
X.X +/- .030		DATE 11 JUN 99 DRAWN BY HERME SHEET No. 2 OF 2		
ANGLE +/- 1.0°				

Z-Axis Autolube Manifold Assembly

THIS ASSEMBLY USED ON
 VM15/16, VM20, VM22, VM25/30 & TT24

HARDWARE LIST		
No.	QTY	DESCRIPTION
A	1	1/8-27 NPT SHPP

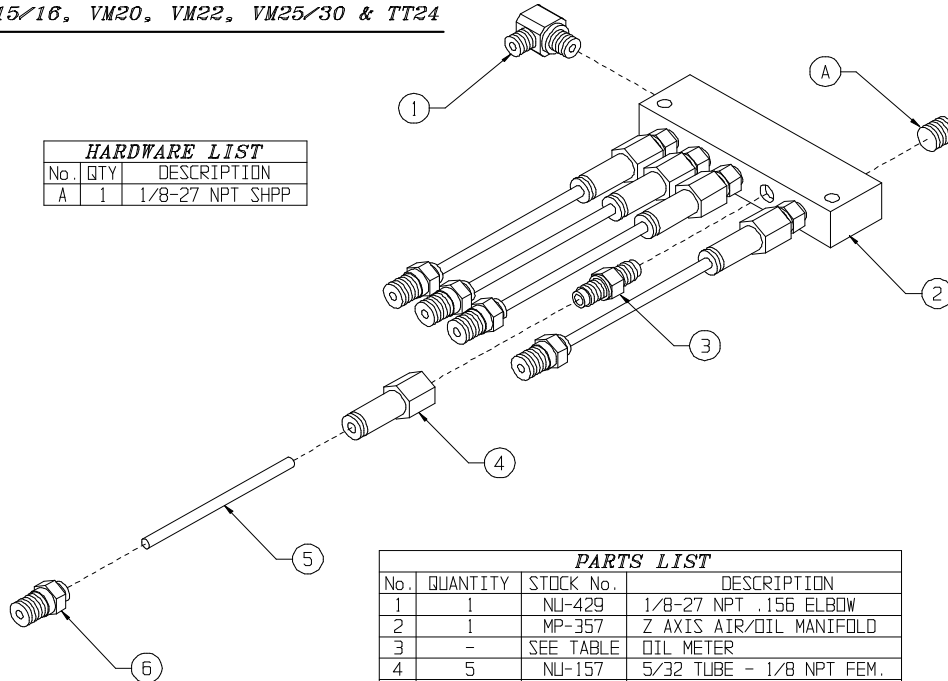


PARTS LIST			
No.	QUANTITY	STOCK No.	DESCRIPTION
1	1	NU-429	1/8-27 NPT .156 ELBOW
2	1	MP-357	Z AXIS AIR/OIL MANIFOLD
3	-	SEE TABLE	OIL METER
4	5	NU-157	5/32 TUBE - 1/8 NPT FEM.
5	SEE TABLE	NU-117	5/32 NYLON TUBING
6	5	SEE TABLE	5/32 TUBE-1/8 NPT M/S

NU-117 TUBING LENGTH						OIL METER
CONNECTION	VM15/16	VM20	VM22	VM25/30	TT24	
FRONT/TOP LEFT RAIL BLOCK	18	20	30	30	10	No.3 (NU-156)
REAR/BOTTOM LEFT RAIL BLOCK	35	14	42	42	20	No.3 (NU-156)
BALL SCREW	24	15	30	30	8	No.2 (NU-155)
REAR/BOTTOM RIGHT RAIL BLOCK	35	8	42	42	20	No.3 (NU-156)
FRONT/TOP RIGHT RAIL BLOCK	18	11	30	30	10	No.3 (NU-156)

ALL MEASUREMENTS ARE IN INCHES

No.	DESCRIPTION	VM15/16	VM20	VM22	VM25/30	TT24
6	ROLLER RAIL	NU-315	NU-315	NU-315	NU-315	NU-315
	BALL RAIL	NU-315 NU-154	NU-315	NU-315	NU-315	NU-315

AUTOLUBE LINE DESTINATIONS

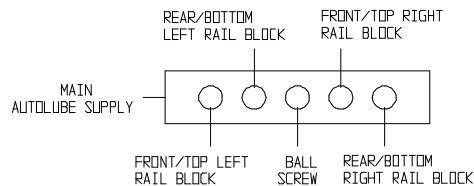

NOTES:


1. USED ON ASSEMBLY No.

CERTAIN INFORMATION CONTAINED HEREIN THE EXCLUSIVE PROPERTY OF MILLTRONICS MFG. CO. IT IS GIVEN IN CONFIDENCE AND IS NOT TO BE USED OR DISCLOSED TO OTHER THAN THE INTENDED RECIPIENT WITHOUT EXPRESSED WRITTEN CONSENT OF MILLTRONICS MFG. CO.

B	ADD TT24		6750		03/09
A	ADD FRAMES TO CHART		6001	N.M.	08/05
REV.	DESCRIPTION		E.C.O. NO.	APP'D BY	DATE
MATERIAL/FINISH			 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA		
STOCK/ASSY No.					
TOLERANCE UNLESS SPECIFIED			TITLE 5 PORT AUTOLUBE MANIFOLD ASSEMBLY		
X .XXX ±			APPLICATION GENERAL PRODUCTS		
X .XX ±			SCALE 1.5:1		
X .X ±			DWG No 6-10-018-050		
ANGLE ±			SIZE B		
			DATE 20 AUG 97		
			DRAWN BY THOMPSON		
			SHEET NO. 1 OF 1		

Thermal Compensation Assembly

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED.

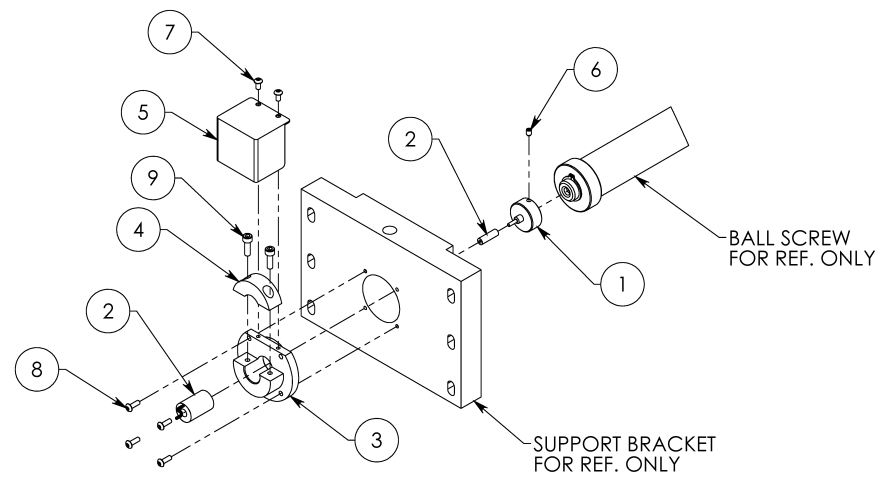

ITEM NO.	QTY	PART NUMBER	DESCRIPTION
1	1	MP00858	THERMAL BALL SCREW CAP
2	1	PR00043	THERMAL COMP SENSOR
3	1	MP00848	THERMAL SENSOR RING
4	1	MP00849	THERMAL SENSOR - CLAMP
5	1	MP00886	X AXIS THERMAL COVER
6	1	SHSSBT 10-32 x .188	10/32 x 3/16 BRASS TIPPED SHSS
7	2	BHCS M4-0.7 x 8	M4-0.7 x 8mm BHCS
8	4	BHCS M4-0.7 x 12	M4-0.7 x 12mm BHCS
9	2	SHCS M5-0.8 x 16	M5-0.8 x 16mm SHCS

NOTES:
 1. ITEMS 3 & 4 ARE REVERSED ON SOME AXES
 2. ITEMS 5 & 7 ARE NOT USED ON SOME AXES



DRAWN	JRD
DATE: 24 JAN 07	
MATERIAL:	
FINISH:	
UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES (MM)	
TOLERANCES:	
FRACTIONAL ±	
ANGULAR: MACH ± 1.0 BEND ±	
ONE PLACE DECIMAL ±.030 [.76]	
TWO PLACE DECIMAL ±.010 [.26]	
THREE PLACE DECIMAL ±.005 [.13]	




MILLTRONICS
 CNC MACHINES
 1400 MILL LANE 952.442.1410
 WACONIA, MN 55387 USA

TITLE: THERMAL COMP ASSEMBLY

SCALE: 1:4	DWG. NO. 10018111
ESTIMATED WEIGHT: 16.0 Lbs.	STOCK/ASSY NO.
	SHEET NO. 1 OF 1

B

Air Filter / Lubricator / Filter Assembly

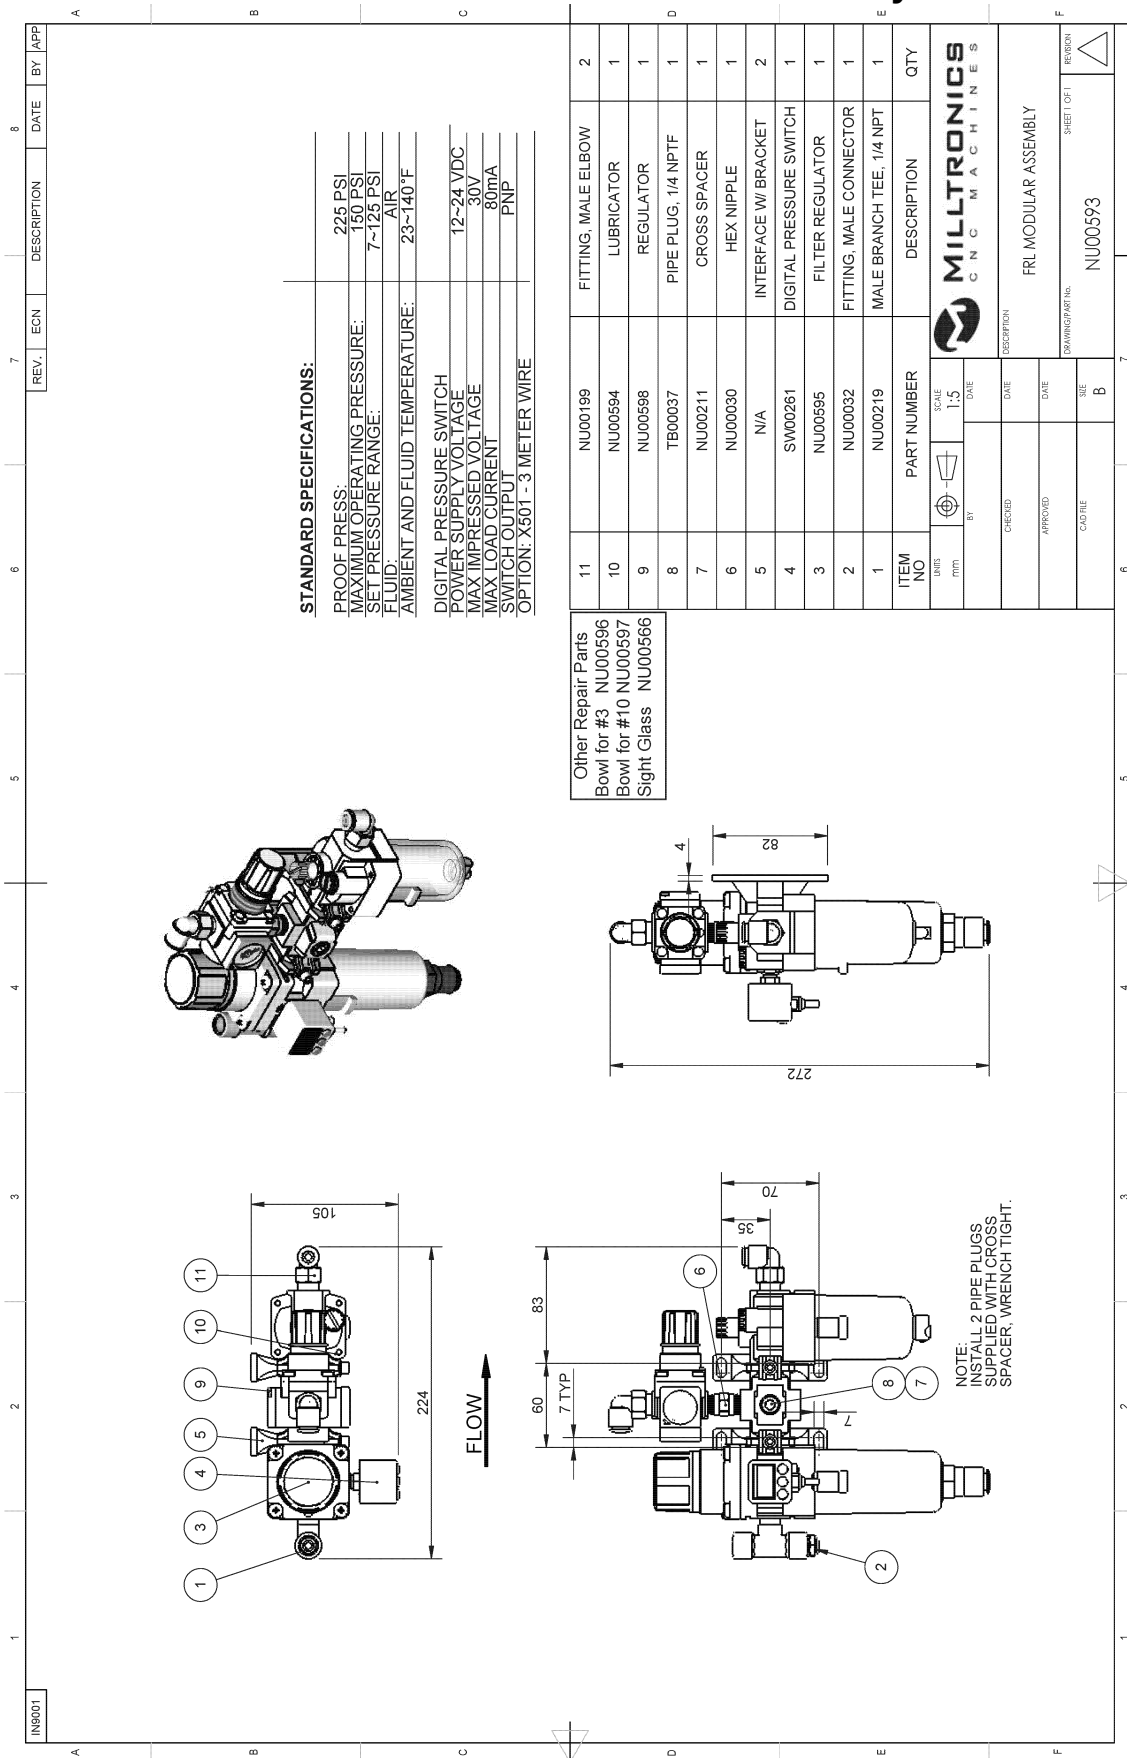

Retention Knob Chart


NOTE: STANDARD RETENTION KNOTS FOR 40 TAPER SPINDLES

MAS RETENTION KNOBS STYLE CT-FLANGE 40 TAPER

DIMENSIONS							MILLTRENICS MACHINE		
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
59.39	1.27	.66	.90	.99	.19	60°		BR50, BR60, BR80, NM18, RH20, RH30, RH33, RH35, RN15, VM15, VM16, VM20, VM22, VM25, VM30, VM2016, VM1C5, VM1C16, VM2C0, VM2C2, VM2C5, VM3C0.	BR50, BR60, BR80, RH20, RH35, RH20, RH30, RH33, RH35, TT24, TT40, TT60, TT80, VM16 VM20, VM22, VM25, VM30, VM3224, VM4224, VM2C0, VM3C5, TT2C4, TT4C0, TT6C0, TT8C0 VM1C16, VM2C0, VM2C2, VM3C5, VM3C0.

NAS RETENTION KNOBS STYLE BT-FLANGE 40 TAPER

DIMENSIONS							MILLTRENICS MACHINE		
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
.59	1.39	1.38	.99	.90	1.10	.16	60°	BR50, BR60, BR80, MM18, RH20, RH30, RH33, RH35, RM15, VM15, VM20, VM22, VM25, VM30, VM216, VM165, VM16C, VM20, VM22, VM25, VM30,	BR50, BR60, BR80, RH20, RH35, RH20, RH30, RH33, RH35, TT24, TT40, TT60, TT80, VM16 VM20, VM22, VM25, VM30, VM216, VM165, VM16C, VM20, VM22, VM25, VM30



ENGLISH THREADS FOR V-FLANGE
METRIC THREADS FOR BT-FLANGE


NOTE: STANDARD RETENTION KNOBS FOR 50 TAPER SPINDLES

ANSI RETENTION KNOBS STYLE CT-FLANGE 50 TAPER

DIMENSIONS							MILLITRONICS MACHINE
A	B	C	D	E	F	G	ANGLE
1.14	.83	1.00	1.32	1.42	.70	.45	45°

ANSI RETENTION KNOBS STYLE BT-FLANGE 50 TAPER

DIMENSIONS							MILLITRONICS MACHINE		
A	B	C	D	E	F	G	ANGLE		
1.14	.83	1.00	1.32	1.42	.70	.45	45°	HBM110, RH33XP, RH35XP, TT40XP, VM22XP, VM25XP VM30XP, TTC40XP, VMC22XP, VMC25XP, VMC30XP,	



ENGLISH THREADS FOR V-FLANGE
METRIC THREADS FOR RT-FLANGE

NOTE: OPTIONAL RETENTION KNOBS FOR 40 TAPER SPINDLES

ANSI RETENTION KNOBS STYLE CT-FLANGE 40 TAPER

DIMENSIONS								MILLITRONICS MACHINE	
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
.74	.49	.64	.86	.93	.44	.27	45°	SELECTION NOT AVAILABLE	BR50, BR60, BR80, MH20, MH35, RH20, RH30, RH33, RH35, TT24, TT40, TT60, TT80, VM16, VM20, VM22, VM25, VM30, VM32A, VM42A, MH20, MH35, TT24, TT40, TT60, TT80, VM16, VM20, VM22, VM25, VM30

ANSI RETENTION KNOBS STYLE BT-FLANGE 40 TAPER

DIMENSIONS								MILLTRENCS MACHINE	
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
.74	.49	.75	.86	.90	.55	.28	45°	SELECTION NOT REQUIRED	BR50, BR60, BR80, H20, H35, H20, RH30, RH33, RH35, T124, T140, T180, T180, VM16, VM20, VM22, VM25, VM30, VM32, VM34, VM424, VM420, WAC35, T124, T140, T180, T180, T180, VM16, VM20, VM22, VM25, VM30, VM34, VM424

MAS RETENTION KNOBS STYLE CT-FLANGE 40 TAPER

DIMENSIONS								MILLITRENICS MACHINE	
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
.59	.39	1.27	.66	.90	.99	.19	45°	SELECTION NOT AVAILABLE	BR50, BR60, BR80, MH20, MH35, RH20, RH30, RH33, RH35, T124, T740, T760, T780, VM16, VM20, VM22, VM25, W930, VM3224, VM4224, VM620, VM635, TTC24, TTC40, TTC60, TTC80, VM16, VM620, VM622, VM625, VM630

NAS RETENTION KNOBS STYLE BT-FLANGE 40 TAPER


DIMENSIONS								MILLTRENICS MACHINE	
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
50	39	1.38	90	90	1.10	.16	45°	SELECTION NOT AVAILABLE	BR50, BR60, BR80, HM20, HM35, RH20, RH30, RH33, RH38, TT24, TT40, TT60, TT80, VM16, VM20, VM22, VM25, VM30, VM324, VM424, VM620, VM635, TT624, TT640, TT660, TT680, VM16, VM20, VM22, VM25, VM30

DIN 69872 RETENTION KNOBS STYLE CT-FLANGE 40 TAPER


DIMENSIONS							MILLITRONICS MACHINE		
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
75	35	1.02	86	90	74	24	75°	SELECTION NOT AVAILABLE	BR50, BR60, BR80, HM20, HM35, RH20, RH30, RH33, RH35, T124, T140, T160, T180, VM16, VM20, VM22, VM25, VM30, VM32, VM42A, VM42C, VM35, T1C24, T1C40, T1C60, T1C80, VM16, VM20, VM22, VM25, VM30.

DIN 69872 RETENTION KNOBS STYLE DIN-FLANGE 40 TAPER


DIMENSIONS								MILLITRONICS MACHINE	
A	B	C	D	E	F	G	ANGLE	60mm SPINDLE	70mm SPINDLE
.75	.51	1.02	.99	.90	.79	.28	75°	SELECTION NOT AVAILABLE	BR50, BR60, BR80, HX20, HX35, HX40, HX30, HX33, HX45, TT24, TT40, TT60, TT80, VM16, VM20, VM25, VM30, VM33, VM224, VM224, HMC20, HMC35, TTC24, TTC40, TTC60, TTC80, VM16, VM20, VM22, VM25, VM30



ENGLISH THREADS FOR V-FLANGE
METRIC THREADS FOR BT-FLANGE



ENGLISH THREADS FOR V-FLANGE
METRIC THREADS FOR BT-FLANGE



ENGLISH THREADS FOR V-FLANGE
METRIC THREADS FOR DIN-FLANGE

NOTES:

1. FOR SPINDLES OF 8000 RPM AND GREATER YOU MUST USE BALANCED TOOLING TO A G2.5 SPEC. OR IT WILL VOID THE SPINDLE WARRANTY.
2. IN-LINE SPINDLES, IN THEIR RESPECTIVE FRAME SIZE, USE THE SAME RETENTION KNOB AS THE NON IN-LINE SPINDLES
3. ALL DIMENSIONS ARE IN INCHES


J	REMOVE MFG.PART NUMBERS & ADD DIMENSIONS	7749	N.M.	03/13	
I	ADD VM2016, VM4224, T160, T180, TT40XP, TTC24, TTC40, TTC40XP, HB1M10	7573	N.M.	07/12	
H	ADD VM22XP, RH33XP FRAMES TO 50 TAPER	6715	N.M.	01/09	
G	ADD MM18 AND MOVE HMC70 FRAMES TO 50 TAPER	6193	N.M.	10/06	
F	ADD VMC, TT, AND HMC FRAMES	6175	N.M.	09/06	
E	UPDATE CHART	5992	N.M.	08/05	
D	ADD RH/RW12 & RH19	5146	N.M.	09/01	
C	ADD RETENTION KNOBS TO CHART	4859	N.M.	12/00	
B	CHANGE 70nm BT-FLANGE CHART	4730	N.M.	10/00	
A	ADD LYNDEX CORP. IN CHART	4351	N.M.	1/00	
REV.	DESCRIPTION	E.C.O. NO.	APP'D BY	DATE	
 MILLITRONICS 2880 BILL CLARK BLVD TACOMA, WA 98403-2000	TITLE	RETENTION KNOB CHART	SCALE 1.75:1	ENG NO. 6-11-018-054	SIZE E
	APPLICATION	GENERAL PRODUCTS	DATE 30 APR 99	DRAWN BY DAHKE	SHEET NO. 1 OF 1

Machine Lubrication Instructions

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF
 MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE
 WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED

NOTES:

1. USE MOBILITH AW SERIES MULTIPURPOSE EP GREASE OR OTHER EQUIVALENT FOR ALL LUBE POINTS. MACHINE SHOULD BE SERVICED ONCE A MONTH FOR PROPER OPERATION AND ACCURACY OF MACHINE. SEE PAGE TWO FOR SPECIFICATIONS.
2. CLEAN AND FILL AIR FILTER/REGULATOR/OILER EVERY WEEK FOR PROPER OPERATION OF ALL PNEUMATIC PARTS. FILL WITH MARVEL No. 085, MOBIL VELOCITE No. 10 OR OTHER EQUIVALENT QUALITY AIR TOOL OIL. SEE PAGE TWO FOR SPECIFICATIONS.
3. MACHINES WITH AUTOLUBE OPTION USE MOBIL OIL VACTRA 2, AMOCO WAYTEC No. 68, SUNOCO SUNWAY LUBE No. 1180, OR EQUIVALENT QUALITY WAY OIL. SEE PAGE TWO FOR SPECIFICATIONS.
4. MACHINES WITH 15,000 RPM AIR/OIL OPTION USE MOBIL OIL DTE 24, OR EQUIVALENT QUALITY SPINDLE OIL. SEE PAGE TWO FOR SPECIFICATIONS.
5. USE MOBIL OIL DTE 24 OR EQUIVALENT OIL FOR THE DRAWBAR AIR/OIL INTENCIFIER. SEE PAGE TWO FOR SPECIFICATIONS
6. USE MOBILGEAR 627 FOR THE AUTOMATIC TOOL CHANGER GEAR BOX. SEE PAGE TWO FOR SPECIFICATIONS.

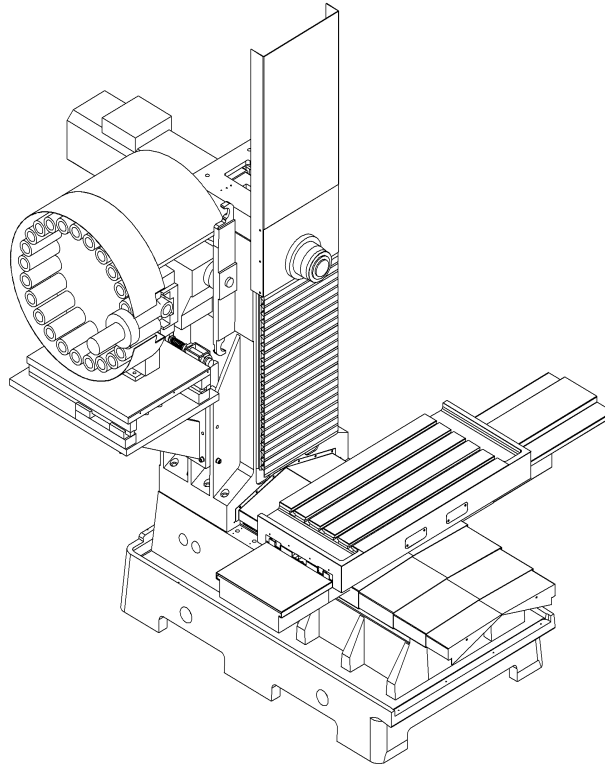

	NAME	DATE	
	DRAWN	DTE	
MATERIAL:			TITLE: HM20 LUBRICATION DRAWING
FINISH:			
UNLESS OTHERWISE SPECIFIED:			SCALE: 1:18 DWG. NO. 10038013
DIMENSIONS ARE IN INCHES (MM)			ESTIMATED WEIGHT: STOCK/ASSY No.
TOLERANCES:			SHEET No. 1 OF 2
FRACTIONAL ±			SIZE B
ANGULAR: MACH ± 1.0 BEND ±			
ONE PLACE DECIMAL ±.030 [.76]			
TWO PLACE DECIMAL ±.010 [.26]			
THREE PLACE DECIMAL ±.005 [.13]			

PROPRIETARY AND CONFIDENTIAL																																																																											
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MILLTRONICS MANUFACTURING. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MILLTRONICS MANUFACTURING IS PROHIBITED.																																																																											
The grease detailed below has been superceded by: Mobilgrease XHP221, Product Code 642454-00, 3-7-2014.																																																																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>PRODUCT NUMBER</td><td>64352-8</td></tr> <tr><td>NLGI GRADE</td><td>1</td></tr> <tr><td>COLOR</td><td>GREEN</td></tr> <tr><td>STRUCTURE</td><td>SMOOTH/TACKY</td></tr> <tr><td>SOAP TYPE</td><td>LITHIUM COMPLEX</td></tr> <tr><td>MINERAL OIL VISCOSITY</td><td></td></tr> <tr><td>cST AT 40 °C</td><td>150</td></tr> <tr><td>cST AT 100 °C</td><td>13</td></tr> <tr><td>SUS AT 100 °F</td><td>750</td></tr> <tr><td>SUS AT 210 °F</td><td>70</td></tr> <tr><td>ISO VISCOSITY GRADE</td><td>150</td></tr> <tr><td>PENETRATION AT 23 °C (77 °F) WORKED</td><td>325</td></tr> <tr><td>DROPPING POINT, ASTM D 2265, °F</td><td>475</td></tr> <tr><td>TIMKEN OK LOAD, ASTM D 2509, lb</td><td>40</td></tr> <tr><td>FOUR-BALL EP TEST, ASTM D 2596, WELD LOAD, kg</td><td>250</td></tr> <tr><td>LOAD WEAR INDEX</td><td>40</td></tr> <tr><td>FOUR-BALL WEAR TEST, ASTM D 2266, SCAR DIAMETER, mm, MAX</td><td>0.5</td></tr> <tr><td>CORROSION PREVENTION, ASTM D 1743</td><td>PASS</td></tr> <tr><td>WHEEL BEARING TEST, ASTM D 4290 MODIFIED, LEAKAGE, GRAM</td><td>5</td></tr> </table>	PRODUCT NUMBER	64352-8	NLGI GRADE	1	COLOR	GREEN	STRUCTURE	SMOOTH/TACKY	SOAP TYPE	LITHIUM COMPLEX	MINERAL OIL VISCOSITY		cST AT 40 °C	150	cST AT 100 °C	13	SUS AT 100 °F	750	SUS AT 210 °F	70	ISO VISCOSITY GRADE	150	PENETRATION AT 23 °C (77 °F) WORKED	325	DROPPING POINT, ASTM D 2265, °F	475	TIMKEN OK LOAD, ASTM D 2509, lb	40	FOUR-BALL EP TEST, ASTM D 2596, WELD LOAD, kg	250	LOAD WEAR INDEX	40	FOUR-BALL WEAR TEST, ASTM D 2266, SCAR DIAMETER, mm, MAX	0.5	CORROSION PREVENTION, ASTM D 1743	PASS	WHEEL BEARING TEST, ASTM D 4290 MODIFIED, LEAKAGE, GRAM	5																																					
PRODUCT NUMBER	64352-8																																																																										
NLGI GRADE	1																																																																										
COLOR	GREEN																																																																										
STRUCTURE	SMOOTH/TACKY																																																																										
SOAP TYPE	LITHIUM COMPLEX																																																																										
MINERAL OIL VISCOSITY																																																																											
cST AT 40 °C	150																																																																										
cST AT 100 °C	13																																																																										
SUS AT 100 °F	750																																																																										
SUS AT 210 °F	70																																																																										
ISO VISCOSITY GRADE	150																																																																										
PENETRATION AT 23 °C (77 °F) WORKED	325																																																																										
DROPPING POINT, ASTM D 2265, °F	475																																																																										
TIMKEN OK LOAD, ASTM D 2509, lb	40																																																																										
FOUR-BALL EP TEST, ASTM D 2596, WELD LOAD, kg	250																																																																										
LOAD WEAR INDEX	40																																																																										
FOUR-BALL WEAR TEST, ASTM D 2266, SCAR DIAMETER, mm, MAX	0.5																																																																										
CORROSION PREVENTION, ASTM D 1743	PASS																																																																										
WHEEL BEARING TEST, ASTM D 4290 MODIFIED, LEAKAGE, GRAM	5																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;"><i>MOBIL VACTRA OIL No. 2</i></td></tr> <tr><td>PRODUCT NUMBER</td><td>60049-4</td></tr> <tr><td>SPECIFIC GRAVITY, 60/60F</td><td>0.88</td></tr> <tr><td>POUR POINT, °C (°F), max.</td><td>-9 (16)</td></tr> <tr><td>FLASH POINT, °C (°F), min</td><td>244 (472)</td></tr> <tr><td>VISCOSITY</td><td></td></tr> <tr><td>cST AT 40 °C</td><td>68</td></tr> <tr><td>cST AT 100 °C</td><td>8.6</td></tr> <tr><td>SUS AT 100 °F</td><td>356</td></tr> <tr><td>SUS AT 210 °F</td><td>55</td></tr> <tr><td>VISCOSITY INDEX</td><td>97</td></tr> <tr><td>ISO VG</td><td>68</td></tr> <tr><td>COLOR, ASTM D 1500</td><td>4</td></tr> <tr><td>FZG, PASS STAGES</td><td>11</td></tr> <tr><td>4 BALL WELD, kg, ASTM D 2783</td><td>160</td></tr> <tr><td>4 BALL WEAR, mm, ASTM D 4172</td><td>0.22</td></tr> <tr><td>COPPER CORROSION, ASTM D 130</td><td>1B</td></tr> <tr><td>RUST, D665A</td><td>PASS</td></tr> <tr><td>VICKERS V-104C, mg D 2882 (MOD)</td><td>-</td></tr> <tr><td>CMCO, P-SPEC, APPROVAL</td><td>P-47</td></tr> <tr><td>BIJUR PT 37-1 APPROVAL</td><td>PASS</td></tr> <tr><td>OKUMA APPROVAL</td><td>PASS</td></tr> </table>	<i>MOBIL VACTRA OIL No. 2</i>		PRODUCT NUMBER	60049-4	SPECIFIC GRAVITY, 60/60F	0.88	POUR POINT, °C (°F), max.	-9 (16)	FLASH POINT, °C (°F), min	244 (472)	VISCOSITY		cST AT 40 °C	68	cST AT 100 °C	8.6	SUS AT 100 °F	356	SUS AT 210 °F	55	VISCOSITY INDEX	97	ISO VG	68	COLOR, ASTM D 1500	4	FZG, PASS STAGES	11	4 BALL WELD, kg, ASTM D 2783	160	4 BALL WEAR, mm, ASTM D 4172	0.22	COPPER CORROSION, ASTM D 130	1B	RUST, D665A	PASS	VICKERS V-104C, mg D 2882 (MOD)	-	CMCO, P-SPEC, APPROVAL	P-47	BIJUR PT 37-1 APPROVAL	PASS	OKUMA APPROVAL	PASS	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;"><i>MOBIL VELOCITE OIL No. 10</i></td></tr> <tr><td>PRODUCT NUMBER</td><td>60068-4</td></tr> <tr><td>GRAVITY, API</td><td>32.0</td></tr> <tr><td>POUR, °C (°F), max</td><td>-4 (25)</td></tr> <tr><td>FLASH, °C (°F), min</td><td>182 (360)</td></tr> <tr><td>VISCOSITY</td><td></td></tr> <tr><td>cST AT 40 °C</td><td>22.0</td></tr> <tr><td>cST AT 100 °C</td><td>4.0</td></tr> <tr><td>SUS AT 100 °F</td><td>115</td></tr> <tr><td>SUS AT 210 °F</td><td>40</td></tr> <tr><td>ISO VG</td><td>22</td></tr> <tr><td>VISCOSITY INDEX</td><td>95</td></tr> <tr><td>COLOR, ASTM D 1500</td><td>2.0</td></tr> <tr><td>RUST PROTECTION, ASTM D 665</td><td>PASS</td></tr> <tr><td>CINCINNATI MILACROM SPECIFICATION</td><td>P-45</td></tr> </table>	<i>MOBIL VELOCITE OIL No. 10</i>		PRODUCT NUMBER	60068-4	GRAVITY, API	32.0	POUR, °C (°F), max	-4 (25)	FLASH, °C (°F), min	182 (360)	VISCOSITY		cST AT 40 °C	22.0	cST AT 100 °C	4.0	SUS AT 100 °F	115	SUS AT 210 °F	40	ISO VG	22	VISCOSITY INDEX	95	COLOR, ASTM D 1500	2.0	RUST PROTECTION, ASTM D 665	PASS	CINCINNATI MILACROM SPECIFICATION	P-45
<i>MOBIL VACTRA OIL No. 2</i>																																																																											
PRODUCT NUMBER	60049-4																																																																										
SPECIFIC GRAVITY, 60/60F	0.88																																																																										
POUR POINT, °C (°F), max.	-9 (16)																																																																										
FLASH POINT, °C (°F), min	244 (472)																																																																										
VISCOSITY																																																																											
cST AT 40 °C	68																																																																										
cST AT 100 °C	8.6																																																																										
SUS AT 100 °F	356																																																																										
SUS AT 210 °F	55																																																																										
VISCOSITY INDEX	97																																																																										
ISO VG	68																																																																										
COLOR, ASTM D 1500	4																																																																										
FZG, PASS STAGES	11																																																																										
4 BALL WELD, kg, ASTM D 2783	160																																																																										
4 BALL WEAR, mm, ASTM D 4172	0.22																																																																										
COPPER CORROSION, ASTM D 130	1B																																																																										
RUST, D665A	PASS																																																																										
VICKERS V-104C, mg D 2882 (MOD)	-																																																																										
CMCO, P-SPEC, APPROVAL	P-47																																																																										
BIJUR PT 37-1 APPROVAL	PASS																																																																										
OKUMA APPROVAL	PASS																																																																										
<i>MOBIL VELOCITE OIL No. 10</i>																																																																											
PRODUCT NUMBER	60068-4																																																																										
GRAVITY, API	32.0																																																																										
POUR, °C (°F), max	-4 (25)																																																																										
FLASH, °C (°F), min	182 (360)																																																																										
VISCOSITY																																																																											
cST AT 40 °C	22.0																																																																										
cST AT 100 °C	4.0																																																																										
SUS AT 100 °F	115																																																																										
SUS AT 210 °F	40																																																																										
ISO VG	22																																																																										
VISCOSITY INDEX	95																																																																										
COLOR, ASTM D 1500	2.0																																																																										
RUST PROTECTION, ASTM D 665	PASS																																																																										
CINCINNATI MILACROM SPECIFICATION	P-45																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;"><i>MOBIL GEAR 627</i></td></tr> <tr><td>ISO VISCOSITY GRADE</td><td>100</td></tr> <tr><td>VISCOSITY, ASTM D 445</td><td></td></tr> <tr><td>cST @ 40 °C</td><td>100</td></tr> <tr><td>cST @ 100 °C</td><td>12.0</td></tr> <tr><td>VISCOSITY INDEX, ASTM D 2270</td><td>98</td></tr> <tr><td>POUR POINT, °C, ASTM D 97</td><td>-27</td></tr> <tr><td>FLASH POINT, °C, ASTM D 92</td><td>235</td></tr> <tr><td>DENSITY AT 15.6 °C, ASTM D 4052, kg/l</td><td>0.89</td></tr> <tr><td>TIMKEN OK LOAD, ASTM D 2782, lb</td><td>65</td></tr> <tr><td>4-BALL EP TEST, ASTM D 2783</td><td></td></tr> <tr><td>WELD LOAD, kg</td><td>250</td></tr> <tr><td>LOAD WEAR INDEX, kfg</td><td>48</td></tr> <tr><td>FZG SCUFFING, DIN 51534, A/8.3/90, FAIL STAGE</td><td>12+</td></tr> <tr><td>RUST PROTECTION, ASTM D 665, SEA WATER</td><td>PASS</td></tr> <tr><td>COPPER STRIP CORROSION, ASTM D 130, 3hr. AT 100 °C</td><td>1B</td></tr> <tr><td>DEMULSIBILITY, ASTM D 1401 AT 54 °C TIME TO 3ml EMULSION, MINUTES AT 82 °C</td><td>30</td></tr> <tr><td>FOAM TEST, ASTM D 892, SEQ I AND II, TENDENCY/STABILITY, ml/ml</td><td>0/0</td></tr> </table>	<i>MOBIL GEAR 627</i>		ISO VISCOSITY GRADE	100	VISCOSITY, ASTM D 445		cST @ 40 °C	100	cST @ 100 °C	12.0	VISCOSITY INDEX, ASTM D 2270	98	POUR POINT, °C, ASTM D 97	-27	FLASH POINT, °C, ASTM D 92	235	DENSITY AT 15.6 °C, ASTM D 4052, kg/l	0.89	TIMKEN OK LOAD, ASTM D 2782, lb	65	4-BALL EP TEST, ASTM D 2783		WELD LOAD, kg	250	LOAD WEAR INDEX, kfg	48	FZG SCUFFING, DIN 51534, A/8.3/90, FAIL STAGE	12+	RUST PROTECTION, ASTM D 665, SEA WATER	PASS	COPPER STRIP CORROSION, ASTM D 130, 3hr. AT 100 °C	1B	DEMULSIBILITY, ASTM D 1401 AT 54 °C TIME TO 3ml EMULSION, MINUTES AT 82 °C	30	FOAM TEST, ASTM D 892, SEQ I AND II, TENDENCY/STABILITY, ml/ml	0/0	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;"><i>MOBIL DTE 24</i></td></tr> <tr><td>PRODUCT NUMBER</td><td>60262-3</td></tr> <tr><td>98 CMCS CODE (DRUM)</td><td>98020E</td></tr> <tr><td>SPECIFIC GRAVITY</td><td>0.871</td></tr> <tr><td>POUR POINT, °C (°F), max</td><td>-18 (0)</td></tr> <tr><td>FLASH POINT, °C (°F) min</td><td>200 (392)</td></tr> <tr><td>VISCOSITY</td><td></td></tr> <tr><td>cST AT 40 °C</td><td>32</td></tr> <tr><td>cST AT 100 °C</td><td>5.3</td></tr> <tr><td>SUS AT 100 °F</td><td>165</td></tr> <tr><td>SUS AT 210 °F</td><td>44</td></tr> <tr><td>ISO VISCOSITY GRADE</td><td>32</td></tr> <tr><td>VISCOSITY INDEX</td><td>95</td></tr> <tr><td>RUST PROTECTION</td><td>PASS</td></tr> <tr><td>ASTM D, A & B</td><td></td></tr> <tr><td>COLOR, ASTM D1500, max</td><td>3.5</td></tr> <tr><td>FZG GEAR TEST STAGES</td><td></td></tr> <tr><td>PASSED DIN 51534</td><td>12</td></tr> </table>	<i>MOBIL DTE 24</i>		PRODUCT NUMBER	60262-3	98 CMCS CODE (DRUM)	98020E	SPECIFIC GRAVITY	0.871	POUR POINT, °C (°F), max	-18 (0)	FLASH POINT, °C (°F) min	200 (392)	VISCOSITY		cST AT 40 °C	32	cST AT 100 °C	5.3	SUS AT 100 °F	165	SUS AT 210 °F	44	ISO VISCOSITY GRADE	32	VISCOSITY INDEX	95	RUST PROTECTION	PASS	ASTM D, A & B		COLOR, ASTM D1500, max	3.5	FZG GEAR TEST STAGES		PASSED DIN 51534	12		
<i>MOBIL GEAR 627</i>																																																																											
ISO VISCOSITY GRADE	100																																																																										
VISCOSITY, ASTM D 445																																																																											
cST @ 40 °C	100																																																																										
cST @ 100 °C	12.0																																																																										
VISCOSITY INDEX, ASTM D 2270	98																																																																										
POUR POINT, °C, ASTM D 97	-27																																																																										
FLASH POINT, °C, ASTM D 92	235																																																																										
DENSITY AT 15.6 °C, ASTM D 4052, kg/l	0.89																																																																										
TIMKEN OK LOAD, ASTM D 2782, lb	65																																																																										
4-BALL EP TEST, ASTM D 2783																																																																											
WELD LOAD, kg	250																																																																										
LOAD WEAR INDEX, kfg	48																																																																										
FZG SCUFFING, DIN 51534, A/8.3/90, FAIL STAGE	12+																																																																										
RUST PROTECTION, ASTM D 665, SEA WATER	PASS																																																																										
COPPER STRIP CORROSION, ASTM D 130, 3hr. AT 100 °C	1B																																																																										
DEMULSIBILITY, ASTM D 1401 AT 54 °C TIME TO 3ml EMULSION, MINUTES AT 82 °C	30																																																																										
FOAM TEST, ASTM D 892, SEQ I AND II, TENDENCY/STABILITY, ml/ml	0/0																																																																										
<i>MOBIL DTE 24</i>																																																																											
PRODUCT NUMBER	60262-3																																																																										
98 CMCS CODE (DRUM)	98020E																																																																										
SPECIFIC GRAVITY	0.871																																																																										
POUR POINT, °C (°F), max	-18 (0)																																																																										
FLASH POINT, °C (°F) min	200 (392)																																																																										
VISCOSITY																																																																											
cST AT 40 °C	32																																																																										
cST AT 100 °C	5.3																																																																										
SUS AT 100 °F	165																																																																										
SUS AT 210 °F	44																																																																										
ISO VISCOSITY GRADE	32																																																																										
VISCOSITY INDEX	95																																																																										
RUST PROTECTION	PASS																																																																										
ASTM D, A & B																																																																											
COLOR, ASTM D1500, max	3.5																																																																										
FZG GEAR TEST STAGES																																																																											
PASSED DIN 51534	12																																																																										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 10%; text-align: center;">  </td> <td style="width: 20%;"> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">NAME</td></tr> <tr><td style="width: 50%;">DRAWN</td><td style="width: 50%;">DATE</td></tr> <tr><td style="text-align: center;">DTE</td><td style="text-align: center;">11 NOV 08</td></tr> </table> </td> <td style="width: 10%; text-align: center;">  </td> <td style="width: 60%;"> 1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA </td> </tr> <tr> <td colspan="2"> MATERIAL: _____ FINISH: _____ </td> <td colspan="2"> TITLE: HM20 LUBRICATION DRAWING </td> </tr> <tr> <td colspan="2"> UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13] </td> <td> SCALE: 1:18 </td> <td> DWG. NO. 10038013 </td> </tr> <tr> <td colspan="2"></td> <td> ESTIMATED WEIGHT: </td> <td> STOCK/ASSY NO. _____ SHEET No. 2 OF 2 </td> </tr> </table>			<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">NAME</td></tr> <tr><td style="width: 50%;">DRAWN</td><td style="width: 50%;">DATE</td></tr> <tr><td style="text-align: center;">DTE</td><td style="text-align: center;">11 NOV 08</td></tr> </table>	NAME		DRAWN	DATE	DTE	11 NOV 08		1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA	MATERIAL: _____ FINISH: _____		TITLE: HM20 LUBRICATION DRAWING		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		SCALE: 1:18	DWG. NO. 10038013			ESTIMATED WEIGHT:	STOCK/ASSY NO. _____ SHEET No. 2 OF 2																																																				
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td colspan="2" style="text-align: center;">NAME</td></tr> <tr><td style="width: 50%;">DRAWN</td><td style="width: 50%;">DATE</td></tr> <tr><td style="text-align: center;">DTE</td><td style="text-align: center;">11 NOV 08</td></tr> </table>	NAME		DRAWN	DATE	DTE	11 NOV 08		1400 MILL LANE 952.442.1410 WACONIA, MN 55387 USA																																																																		
NAME																																																																											
DRAWN	DATE																																																																										
DTE	11 NOV 08																																																																										
MATERIAL: _____ FINISH: _____		TITLE: HM20 LUBRICATION DRAWING																																																																									
UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES (MM) TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± 1.0 BEND ± ONE PLACE DECIMAL ±.030 [.76] TWO PLACE DECIMAL ±.010 [.26] THREE PLACE DECIMAL ±.005 [.13]		SCALE: 1:18	DWG. NO. 10038013																																																																								
		ESTIMATED WEIGHT:	STOCK/ASSY NO. _____ SHEET No. 2 OF 2																																																																								

Waylube Pump MA00458

The on time and off time can be adjusted using MISC control parameters “Way Lube ON time (sec)”, and “Way Lube OFF time (min)”.

Oiler Comparison

	Old style	New style
Model #	CESD	CEN01
Part #	MA00219	MA00458
Timer function ON/OFF	Built-in controls	Via CNC #66
Audible alarm	YES	NO
Oil pressure gauge	NO	YES
Manual override button	YES	YES

Software & control

All 8200 versions have the functionality. 7200 version 77401 or higher is required to have the functionality.

The oiler timer is functional only when the “Grease Cycle Time” parameter is set to Zero, and the Way Lube ON and OFF time parameters are non-zero.

Pictures of MA00458

